

OPERATOR'S GUIDE

Includes Safety, Use and Maintenance Information





A WARNING

Read this guide thoroughly. It contains important safety information. Minimum recommended operators age: 16 years old. Keep this operator's guide with the vehicle at all times.

520003376

Original Intructions

⚠ WARNING

This vehicle may exceed the performance of other vehicles you may have ridden in the past. Take time to familiarize yourself with your new vehicle.

CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING

Operating, servicing and maintaining an off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to

www.p65warnings.ca.gov/products/passenger-vehicle.

TM® Trademarks of BRP or its affiliates.

This is a non-exhaustive list of trademarks that are the property of Bombardier Recreational Products Inc. or its affiliates. Trademarks may not be registered in every jurisdictions:

ACETM D.E.S.S.TM HPGTM ITCTM LYNX® ROTAX® XPS®

All rights reserved. No parts of this guide may be reproduced in any form without the prior written permission of Bombardier Recreational Products Inc.

©Bombardier Recreational Products Inc. (BRP) 2024

| Deutsch | Dieses Handbuch ist möglicherweise in Ihrer Landessprache verfügbar. Bitte wenden Sie sich an Ihren Händler oder besuchen Sie: www.operatorsguides.brp.com |
|------------|--|
| English | This guide may be available in your language. Check with your dealer or go to: www.operatorsguides.brp.com |
| Español | Es posible que este manual esté disponible en su idioma. Consulte a su distribuidor o visite: www.operatorsguides.brp.com |
| Français | Ce guide peut être disponible dans votre langue. Vérifier avec votre concessionnaire ou aller à: www.operatorsguides.brp.com |
| Italiano | Questa guida potrebbe essere disponibile nella propria lingua. Contattare il concessionario o consultare: www.operatorsguides.brp.com |
| 中文 | 本手册可能有您的语种的翻译版本。请向经销商问询,或者登录 www.operatorsguides.brp.com 查询。 |
| 日本語 | このガイドは、言語によって翻訳版が用意されています。. ディーラーに問い合わせるか、次のアドレスでご確認ください: www.operatorsguides.brp.com |
| Nederlands | Deze handleiding kan beschikbaar zijn in uw taal. Vraag het aan uw dealer of ga naar: www.operatorsguides.brp.com |
| Norsk | Denne boken kan finnes tilgjengelig på ditt eget språk. Kontakt din forhandler eller gå til: www.operatorsguides.brp.com |
| Português | Este manual pode estar disponível em seu idioma. Fale com sua concessionária ou visite o site: www.operatorsguides.brp.com |
| Русский | Воспользуйтесь руководством на вашем языке. Узнайте о ero наличии у дилера или на странице по адресу www.operatorsguildes.brp.com |
| Suomi | Käyttöohjekirja voi olla saatavissa omalla kielelläsi. Tarkista jälleenmyyjältä tai käy osoitteessa: www.operatorsguides.brp.com |
| Svenska | Denna bok kan finnas tillgänglig på ditt språk. Kontakta din återförsäljare eller gå till: www.operatorsguides.brp.com |

OPERATOR'S GUIDE

| Model | Package | Engine |
|--------|---------|-----------|
| Brutal | RE | 850 E-TEC |

In Canada, products are distributed and serviced by Bombardier Recreational Products Inc. (BRP).

In the USA, products are distributed and serviced by BRP US Inc.

In the European Economic Area (which is comprised of the member states of the European Union plus the United Kingdom, Norway, Iceland and Liechtenstein), the Commonwealth of the Independent States (including Ukraine and Turkmenistan) and Turkey, products are distributed and serviced by BRP European Distribution S.A. and other affiliates or subsidiaries of BRP.

For all other countries, products are distributed and serviced by Bombardier Recreational Products Inc. (BRP) or its affiliates.

TABLE OF CONTENTS

GENERAL INFORMATION

| SAFETY MESSAGES | |
|------------------------------------|----|
| ABOUT THIS OPERATOR'S GUIDE | 13 |
| RESPECT OF THE ENVIRONMENT | 14 |
| BE A RESPONSIBLE RIDER | 16 |
| | |
| SAFETY INFORMATION | |
| BEFORE YOU GO | 18 |
| Operating Age and Ability | |
| Drugs and Alcohol | 18 |
| Drugs and Alcohol | 18 |
| Protective Gear | 19 |
| Required Equipment | 19 |
| Required Equipment | 21 |
| Track Propulsion System | 21 |
| Steering | 21 |
| Tether Cord | 22 |
| Braking | |
| Parking Brake | 22 |
| Towing Another Snowmobile | 22 |
| Accessories and Modifications | |
| Traction Enhancing Products | |
| RIDE SAFELY | |
| Rider Position (Forward Operation) | ∠0 |
| Rider Position (Reverse Operation) | 30 |
| Riding Alone | 32 |
| Riding in a Group | 32 |
| Avoiding Collisions | 34 |
| Riding Behaviors | |
| Speeding | 35 |
| Moving Parts | 35 |
| Know Terrain and Riding Variations | 36 |
| Respect of the Wildlife | 40 |
| Carbon Monoxide (CO) Poisoning | 40 |
| Gasoline Fires and Other Hazards | 41 |
| Burns from Hot Parts | 41 |
| PRACTICE EXERCISES | 42 |
| Where to Practice Exercises | |
| Exercises to Practice | 42 |
| FUELING | 45 |
| Fueling Procedure | 45 |

TABLE OF CONTENTS

| INJECTION OIL TRANSPORTING THE VEHICLE IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED | 46 |
|---|--------------|
| IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED | 47 |
| SIAIES) | 48 |
| Vehicle Safety Labels | 48 |
| Technical Information Labels | <u>67</u> |
| Hang Tag(s)IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES | /0 |
| CEPT CANADA/UNITED STATES) | □ / - |
| Vehicle Safety Labels | 73 73 |
| Technical Information Labels | 93 |
| Hang Tag(s) | 96 |
| PRE-RIDE INSPECTION | 98 |
| Before Starting the Engine | 98 |
| After Engine is Started | 98 |
| Pre-Ride Check List | 99 |
| REPORTING SAFETY DEFECTS | . 101 |
| | |
| VEHICLE INFORMATION | |
| PRIMARY CONTROLS | .104 |
| Handlebar | . 104 |
| Throttle Lever | . 104 |
| Emergency Engine Stop Switch | . 105 |
| Brake Lever | . 107 |
| Engine Cut-off Switch | . 110 112 |
| SECONDARY CONTROLS | 115 |
| Multifunction Switch (if equipped) | 115 |
| Rotary Control (if equipped) | . 121 |
| Rewind Starter Handle | . 123 |
| Horn Button (if equipped) | . 125 |
| GAUGE – 7.2" DIGITAL DIŚPLAY | . 127 |
| Multifunction Display | . 127 |
| Warning Lamps and Indicators | 129 |
| Settings | 131 |
| Basic Functions | 131 |
| Settings | 138 |
| Pairing your Smartphone Via Bluetooth | . 141 |
| Pairing a Helmet | . 142 |
| BRP GO! App | . 142 |
| Quick Tour of the BRP GO! App | . 143 |
| Messages in Multifunction Gauge. | 144 |
| Operator's Guide | |
| Heated Cell Case (if equipped) | 146 |
| Heated Cell Case (if equipped) | 146 |
| , , | |

| Mountain Strap | |
|---|--------------|
| Electric Visor Jack Connector | 147 |
| Drive Belt Guard | 148 |
| Spare Drive Belt Holder | 151 |
| Tools | 153 |
| Poor Storage Comportment | 155 |
| Rear Storage Compartment | 100 |
| BODY AND SEAT | 15/ |
| Windshield | 1 <u>5</u> / |
| Front Storage Compartment | 157 |
| Hood | 158 |
| Side Panel - 2 Latches type | 160 |
| Upper Body Module | 163 |
| Upper Body Module | 170 |
| ELIEL | 472 |
| FUEL | 172 |
| Fuel Requirements | 1/2 |
| Fueling Procedure | 1/3 |
| INJECTION OIL | 176 |
| Recommended Injection Oil | 176 |
| Injection Oil Level Verification | 176 |
| BREAK-IN PERIOD | 178 |
| Operation During Break-In | 178 |
| Operation During Break-In BASIC PROCEDURES | 170 |
| Engine Starting Procedure | 170 |
| Emergency Starting | 170 |
| Vahiala Warm Lin | 100 |
| Vehicle Warm-Up | 102 |
| Reverse (RER) | 183 |
| Shutting Off the Engine | 184 |
| RIDING CONDITIONS AND YOUR SNOWMOBILE | 185 |
| Altitude | 185 |
| Temperature | 185 |
| Hard Packed Snow | 185 |
| TUNE YOUR RIDE | |
| Front Suspension Adjustments | |
| Rear Suspension Adjustments | 102 |
| Adjustment Tips According to Vehicle Behavior | 100 |
| Adjustment rips According to Vehicle Benavior | 199 |
| | |
| MAINTENANCE | |
| | |
| MAINTENANCE SCHEDULE | 202 |
| EPA Regulation - Canadian and USA Vehicles | 202 |
| Deep Snow/ Trail/ Crossover/ Utility Usage | 202 |
| Maintenance Schedule | 203 |
| MAINTENANCE PROCEDURES | 204 |
| MAIN I ENANGE PROCEDURES | |
| Engine Coolant | 215 |
| Exhaust System | 216 |
| Spark Plugs | 217 |
| Brake Fluid | 217 |
| Chaincase Oil | |

TABLE OF CONTENTS

| Drive Chain | |
|---|-------|
| Drive Belt | 227 |
| Drive Pulley | 233 |
| Track | 237 |
| Suspension | 245 |
| Skis | 247 |
| Fuses | 247 |
| Headlights | 249 |
| Battery | 254 |
| VEHICLE CARE | 258 |
| Post-Operation Care | 258 |
| Vehicle Cleaning and Protection | 258 |
| STORAGE | |
| Engine Storage Procedure | 260 |
| PRESEASON PREPARATION | 266 |
| MAINTENANCE RECORDS | 267 |
| MAINTENANCE RECORDS | 201 |
| | |
| TEOLINICAL INFORMATION | |
| TECHNICAL INFORMATION | |
| VELUCI E IDENTIFICATION | 07/ |
| VEHICLE IDENTIFICATION | 276 |
| Vehicle Description Decal | 2/6 |
| Identification Numbers | |
| COMPLIANCE LABELS | 279 |
| EPA Compliance Label | 279 |
| SSCC Label | 280 |
| Regulation (EU) 2016/1628 applicable for Non-Road Mobile | |
| Regulation (EU) 2016/1628 applicable for Non-Road Mobile Machineries | 280 |
| NOISE EMISSION AND VIBRATION VALUES | 282 |
| EU DECLARATION OF CONFORMITY UK DECLARATION OF CONFORMITY | 283 |
| UK DECLARATION OF CONFORMITY | 284 |
| EPA CERTIFIED ENGINES | 285 |
| Engine Emissions Information | 285 |
| BRP RF DESS POST GEN2 (MOWP) USA and Canada | 287 |
| USA and Canada | 287 |
| Mexico | 288 |
| Brazil | 288 |
| Japan | |
| Furone | 288 |
| Europe | 7 810 |
| WIDE LCD DISPLAY | 201 |
| TIDE LOD DIOI LAT | 230 |
| | |
| TECHNICAL SPECIFICATIONS | |
| | |
| FNGINE | 300 |
| ENGINE 850 E-TEC | 300 |
| VEHICLE | 301 |
| Brutal | 302 |
| Diulai | 302 |
| | |

TROUBLESHOOTING

This page is intentionally blank

GENERAL INFORMATION

Congratulations on your purchase of a new BRP snowmobile. Whatever model you have chosen, it is backed by the Bombardier Recreational Products Inc. (BRP) warranty and a network of authorized BRP snowmobile dealers ready to provide the parts, service or accessories you may require.

Your dealer is committed to your satisfaction. He has taken training to perform the initial set-up and inspection of your snowmobile as well as completed the final adjustment required to suit your specific weight and riding environment before you took possession.

At delivery, you were informed of the warranty coverage and signed the Pre-delivery Check List to ensure your new vehicle was prepared to your entire satisfaction.

KNOW BEFORE YOU GO

To learn how to reduce the risk for you, your passenger or bystanders being injured or killed, read the following sections before you operate the vehicle:

- safety information
- vehićle information.

Also read all safety labels on your snowmobile and watch attentively your safety video located at:

HTTPS://WWW.BRPLYNX.COM/SAFETY

Or, use the following QR code.



SAFETY MESSAGES

This operator's guide utilizes the following symbols and words to emphasize particular information:

The safety alert symbol indicates a potential injury hazard.

⚠ WARNING

Indicates a potential hazard which, if not avoided, could result in serious injury or death.

CAUTION

Indicates a hazard situation which, if not avoided, could result in minor or moderate injury.

NOTICE

Indicates an instruction which, if not followed, could severely damage vehicle components or other property.

ABOUT THIS OPERATOR'S GUIDE

This operator's guide has been prepared to acquaint the owner, operator and passenger with this snowmobile and its various controls, maintenance and safe riding instructions.

The following terminology in regards to operator, passenger and vehicle configuration is used as follows throughout this guide:

- Operator: refers to the person being behind the controls and driving the snowmobile.
- Passenger: refers to a person sitting behind the operator.
- 1-UP: refers to a model designed for an operator only.
- 2-UP: refers to a model designed to accommodate one passenger.

Keep this operator's guide in the vehicle as you can refer to it for the operation, instructing others, maintenance and troubleshooting.

Note that this guide is available in several languages. In the event of any discrepancy, the English version shall prevail.

If you want to view and/or print an extra copy of your operator's guide, simply visit the following website:

www.operatorsguides.brp.com

The information contained in this document is correct at the time of publication. BRP, however, maintains a policy of continuous improvement of its products without imposing upon itself any obligation to install them on products previously manufactured. Due to late changes, some differences between the manufactured product and the descriptions and/or specifications in this guide may occur. BRP reserves the right at any time to discontinue or change specifications, designs, features, models or equipment without incurring any obligation upon itself

This operator's guide should remain with the vehicle when it's sold.

RESPECT OF THE ENVIRONMENT

The guidelines that we support are not designed to limit your snow-mobiling fun, but to preserve the beautiful freedom that you can experience only on a snowmobile! These guidelines will keep snowmobilers healthy, happy and able to introduce others to what they know and enjoy about their favorite winter pastime. So, the next time you hit the trails on a cool, crisp and clear winter day, we ask you to remember that you are paving the way for the future of our sport. Help us lead it down the right path! From all of us at BRP, thank you for doing your share.

There is nothing more exhilarating than snowmobiling. Venturing onto snowmobile trails that cross wild areas is an exciting and healthy winter sport. However, as the number of people using these recreational parks increases, so does the potential for damage to the environment. Abuse of land, facilities and resources inevitably leads to restrictions and closures of both private and public land.

In essence, the greatest threat to our sport, is all around us. Which leaves us with one logical choice. When we snowmobile, we must always ride responsibly.

The vast majority respect the law and the environment. Each of us must set an example for those who are new to the sport, young and old alike.

It is in every one's best interest to tread lightly into our recreational areas. Because, in the long run, to protect the sport we must preserve the environment.

Become informed. Obtain maps, regulations and other information from the Forest Service or from other public land agencies. Learn the rules and follow them and that goes for speed limits, too!

Avoid running over young trees, shrubs, and grasses and don't cut wood. On flatlands or areas where trail riding is popular, it's important to ride only where authorized. Remember, there is a link between protecting your environment and your own safety.

Respect wildlife and be particularly sensitive of animals that are rearing young or suffering from food shortage. Stress can sap scarce energy reserves. Refrain from riding in areas where only animals are intended to tread!

Obey gate closures and regulatory signs and remember, light treaders don't litter!

Stay out of wilderness areas. They're closed to all vehicles. Know where the boundaries are.

Obtain permission to travel across private land. Respect the rights of landowners and other people's privacy. Remember, snowmobile technology has lowered the noise factor considerably, but you still shouldn't rev your engines where quiet "is the order of the day".

Snowmobilers know all too well the efforts that have been made throughout the sport's history to enjoy access to areas where people can snowmobile safely and responsibly. This effort continues today, as strong as ever.

Respecting the areas where we ride... wherever they may be... is the only way to ensure their future enjoyment. That's one major reason why we know you'll agree that Light Treading is smart sledding! And there are more.

Enjoying the opportunity to see winter and all its natural majestic wonders, is an experience cherished by snowmobilers. Light Treading will preserve this opportunity and will make it possible for us to expose others to the beauty of winter and the unique thrill of our sport! Light Treading will help our sport to grow!

Finally, Light Treading is the sign of a smart snowmobiler. You don't have to leave big tracks or careen through a virgin forest to show you can ride. So whether you're driving a high performance BRP snowmobile or any other make or model, show you know what you're doing. Show you know how to send snow flying and make tracks with a light touch!

BE A RESPONSIBLE RIDER

At BRP, we believe there's an opportunity for everyone in the powersports and marine communities to come together and rethink how we approach safety, riding etiquette, and the environment. We believe that when we empower all riders to ride responsibly—to look out for each other and safeguard our trails and playgrounds—we inspire an industry to welcome newcomers, build a more caring community and generate positive experiences.

Whether you ride on trails, roads, water or snow, BRP is committed to driving positive change. That's why we're making the Responsible Rider program a key part of our Corporate Social Responsibility initiative through action, education and community empowerment.

To learn more about Responsible Rider, including tips and tricks on safety, riding etiquette and the environment, visit **brplynx**. **com/responsible-rider**. Or, use the following QR code.



It's time to take action! Join BRP, our fellow ISMA members and the entire snowmobiling community - including BRP President and CEO José Boisjoli - in taking the pledge to preserve access to our favorite winter playgrounds and snowmobile trails. You can sign the pledge at snowmobilerspledge.org

SAFETY INFORMATION

BEFORE YOU GO

A WARNING

Disregarding any of the safety precautions and instructions contained in this section could cause injury including the possibility of death.

Operating Age and Ability

Operators must be qualified. Make sure the operator is 16 or older. Your state (or province) may have additional requirements. Laws regarding the minimum age and licensing requirements vary from one jurisdiction to another. Be sure to contact the local authorities for information regarding the legal operation of a snowmobile in the intended jurisdiction of use. BRP highly recommends that you take a safety riding course. Basic training is required for the safe operation of any snowmobile.

Operation of this snowmobile with a disability that impairs vision, reaction time, judgment, or operation of the controls is not recommended. The safe use of your snowmobile depends on many conditions such as visibility, speed, weather, environment, traffic, vehicle condition and the condition of the operator. The performance of some snowmobiles may significantly exceed that of other snowmobiles you have operated. Therefore, use by novice or inexperienced operators is not recommended.

Each passenger must be able to simultaneously place both feet firmly flat against each footboard when properly seated.

Drugs and Alcohol

Never ride after consuming alcohol or drugs. Riding on a snowmobile requires the operator and passenger (s) to be sober, attentive and alcohol, singly or in combination, decreases reaction time, impedes judgment, impairs vision, and inhibits your ability to safely ride on a snowmobile.

Avalanche Safety Training Courses

We recommend that all mountain riders take a local avalanche safety training course to become more familiar with snow conditions and learn how to properly use their equipment. Here are some web sites that can help you finding important information:

- US: www.avalanche.org
- Europe: www.avalanches.org
- Canada: www.avalanche.ca

Protective Gear

Proper snowmobile clothing should be worn by all riders. It should be comfortable and not too tight. Always check the weather forecast before going on a ride. Dress for the coldest weather expected. Thermal underwear next to the skin also provides a good insulation.

Always wear an approved helmet at all times for safety and comfort. They provide both warmth and reduce injury. A stocking type cap, balaclava and face mask should always be carried or worn. Goggles or a face shield that attach to the helmet are indispensable.

Hands should be protected by a pair of snowmobile gloves or mitts which have sufficient insulation and allow use of thumbs and fingers for operation of controls.

Rubber bottom boots with either a nylon or a leather top, with removable felt liners are best suited for snowmobiling.

You should keep yourself as dry as possible when snowmobiling. When you come indoors, take your snowmobile suit and boots off and make certain they dry properly.

Do not wear a long scarf or loose apparels that could get caught in moving parts.

Carry colored lens goggles.

Required Equipment

As the owner of the snowmobile, you are responsible for ensuring that all required safety equipment is aboard. Check your local regulations about requirements.

| First aid kit | Provided tool kit |
|---------------------------|-------------------|
| Mobile phone | Knife |
| Spare spark plugs | Flashlight |
| Adhesive tape (duct tape) | Trail map |
| Spare drive belt | Snack |
| Probe* | Shovel* |

BEFORE YOU GO

| Avalanche beacon* | - |
|---|---|
| *When riding in an area with avalanche risk | |

GET FAMILIAR WITH THE SNOWMOBILE

This vehicle may exceed the performance of other vehicles you may have ridden. Take time to familiarize yourself with your new vehicle.

Inexperienced riders may overlook risks and be surprised by vehicle's specific behavior and terrain conditions. Ride slowly. Excessive speed and reckless driving can kill.

Make sure you read and understand the content of this operator's guide to become completely familiar with the controls and operation of the snowmobile before embarking on your first trip or taking on a passenger(s). If you have not had the opportunity to do so, practice driving solo in a suitable traffic-free area to become accustomed to the feel and response of each control.

It is very important to inform any operator, regardless of his experience, of the handling characteristics of this snowmobile. The snowmobile configuration, such as ski stance, ski type, suspension type, track length, width and type vary from a model to another. The snowmobile handling is greatly influenced by these characteristics.

Track Propulsion System

Your snowmobile features a track propulsion system. The track grips on the snow-covered surface and pushes the snowmobile in the opposite direction of the force applied on the surface. Stay away from the track. Personal injury will result if contact is made with the revolving track.

A WARNING

Never stand behind or near a rotating track. Debris could be projected causing severe injuries.

The grip of the track will vary depending on the surface conditions. The grip may be reduced on hard-pack snow or ice. Reduce your speed and allow more space to turn. Refer to the *TRACTION ENHANCING PRODUCTS* subsection of this guide to learn how to balance the grip of the ski vs the grip of the track. If the front and rear of the snowmobile are out of balance due to an incorrect combination of traction enhancing products, the snowmobile may tend to oversteer or understeer, which could lead to a loss of control.

Steering

Skis are used to steer the snowmobile through the handlebar. The performance to steer will vary depending of the grip of the skis on the surface. Steering control ability may be reduced on hard-pack snow, ice or roads. Reduce speed and allow more space to turn. Refer to the TRACTION ENHANCING PRODUCTS subsection of this guide to learn how to balance the grip of the ski versus the grip of the track. If

the front and rear of the snowmobile are out of balance due to an incorrect combination of traction enhancing products, the snowmobile may tend to oversteer or understeer, which could lead to a loss of control.

Riding with a passenger or when carrying loads, the steering control will also be reduced. Reduce speed and allow more space to turn.

Tether Cord

Always attach tether cord eyelet to clothing before starting the engine to help ensure the engine stops should the operator fall off.

After riding, always remove the tether cord from the engine cut-off switch to avoid unauthorized use by children or others and to prevent starting in a closed environment (ex: garage).

Braking

Braking performances may vary suddenly under certain conditions. Always remember that the snowmobile braking distance may be affected when riding with a passenger and when loaded with cargo at the rear. Never jam the brake and lock the track. Be sure to use restraint in braking to keep from blocking the track in order to avoid surprises that could lead to a loss of control.

Using studs on the track will give you better braking capacity on packed snow or ice but will have no noticeable effect on soft snow. Refer to *Enhancing Traction Control Products* subsection for track studding application.

Parking Brake

Always engage parking brake before starting the engine. Parking brake should be used whenever snowmobile is parked.

Make sure parking brake is fully disengaged before operating the snowmobile. When you ride the vehicle, brake pads that are caused to drag by a continuous pressure on the lever may cause damage to the brake system and cause loss of braking capacity or fire.

Towing Another Snowmobile

If a snowmobile is disabled and must be towed, in an emergency situation only, a rope can be used

- Remove the drive belt. Refer to Maintenance Procedures for more details.
- Attach the rope to the ski legs (spindles), not to the skis. If the ski legs are not accessible, attach the rope to the bumper.

- Have someone sit on the towed snowmobile to steer and activate the brake if needed
- Tow at low speed with extra caution.

NOTICE

Always remove the drive belt of the snowmobile that is to be towed to prevent damage to its belt and drive system.

In some areas, it may be illegal to do so. Check with state or local authorities.

Accessories and Modifications

Any modifications or addition of accessories approved by BRP may affect the handling of your vehicle. It is important to take the time to get familiar with the vehicle once modifications are made to understand how to adapt your driving behavior accordingly.

Avoid installing equipment not specifically approved by BRP for the vehicle and avoid unauthorized modifications. These modifications and equipment have not been tested by BRP and may create hazards. For example, they could:

- Create a loss of control and increase risk of crash.
- Cause overheating or short circuits increasing the risk of fire or burn injuries
- Affect the protection features provided by the vehicle
- Affect the behavior of the trailer when the vehicle is transported
- Cause a risk of losing objects on the road when transported.

Your vehicle may also become illegal to ride.

Ask your authorized BRP dealer for suitable available accessories for your vehicle.

For safety reasons, some BRP accessories must be installed by a BRP dealer but if you decide to install the accessory by yourself, when not required to be done by the dealer, it is important to follow all the instructions carefully and, if applicable, understand all the information on how to use the product or for servicing.

If the accessory has been installed on your vehicle by another person than you, BRP strongly recommends you to read the corresponding instruction sheet as there may be more for information on how to use it safely or for the servicing.

The instruction sheets can be found at this address:

HTTPS://INSTRUCTIONS.BRP.COM

Traction Enhancing Products

NOTE:

This section is applicable to all snowmobile models that are either equipped with a:

- Factory installed track approved by BRP for special studs installation.
- Factory pre-studded track.

or that can received one of these tracks.

Always refer to your authorized BRP snowmobile dealer to learn more on traction enhancing products and applicability on your snowmobile.

Using traction enhancing products such as, adjustable or more aggressive ski carbide runners and / or track studs on your snowmobile will change its behavior, particularly in terms of maneuverability, acceleration, and braking.

Using traction enhancing products gives a better grip on hard packed snow and ice, but has no noticeable effect in deep snow. For this reason, driving a snowmobile equipped with traction enhancing products requires a certain adaptation period. If your snowmobile is equipped with traction enhancing products, be sure to take plenty of time to get used to the way it handles when turning, accelerating, and braking.

The use of track studs can increase the load and the stress on certain snowmobile components, as well as the vibration level. This can cause premature wear on parts such as belt, brake linings, bearings, chain, chain sprockets, and shorten track life.

Track studs can also cause serious damage to your snowmobile if it is not equipped with the appropriate tunnel protectors.

Check local regulations concerning the use of traction enhancing products on snowmobiles.

Studding an unapproved track or using unapproved studs increase the risk of the track tearing or severing

Installing track studs and tunnel protector(s) requires technical knowledge. To ensure safe and proper installation, BRP recommends to have the studs installed by your dealer.

For maintenance and replacement refer to *Track* in *Maintenance Procedures*.

Maneuverability


Using traction enhancing products such as, more aggressive ski carbide runners and/or studs makes the snowmobile grip the ground better at both the front and at the rear. The use of carbide runners is therefore required to give the skis a better grip, so that the front and rear of the snowmobile are in balance. While off-the-shelf carbide ski runners are adequate, they don't necessarily give you optimal control, since that depends on your personal preferences, your riding style, and how your suspension is adjusted.

⚠ WARNING

If the front and rear of the snowmobile are out of balance due to an incorrect combination of traction enhancing products, the snowmobile may tend to oversteer or understeer, which could lead to a loss of control.

Oversteering


In certain conditions, using more aggressive ski carbide runners without studs on the rear track could make the snowmobile prone to oversteering, see illustration.

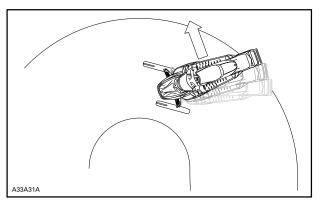

OVERSTEERING

Understeering


In certain conditions, the use of studs on the track could make the snowmobile prone to understeering if the skis are not equipped with more aggressive ski carbide runners, see illustration.

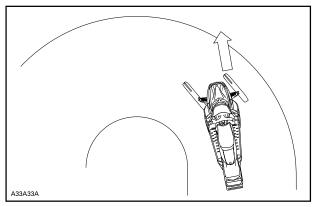

UNDERSTEERING

Controlled Driving

A balanced combination of carbide ski runners and studs on the track ensures adequate control and better handling, see illustration.

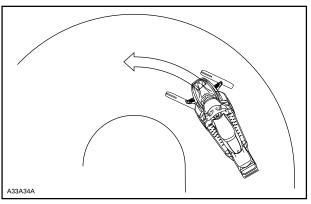

CONTROLLED DRIVING

Acceleration

Using studs on the track will allow your sled to accelerate better on packed snow and ice but will have no noticeable effect on soft snow. This can cause sudden variations in traction under certain conditions.

Always go easy on the throttle and never try to spin the track to make the rear of the snowmobile skid. This could cause debris or ice to be thrown violently backwards, possibly injuring others nearby or on snowmobiles behind you.

Braking

As in the case of acceleration, using studs on the track will give you better braking capacity on packed snow or ice but will have no noticeable effect on soft snow. Braking may thus vary suddenly under certain conditions. Be sure to use restraint in braking to keep from blocking the track in order to avoid surprises that could lead to a loss of control.

RIDE SAFELY

Rider Position (Forward Operation)

Your riding position and balance are the two basic principles of making your snowmobile go where you want it to. When turning on the side of a hill, you and your passenger must be ready to shift body weight to help it turn in the desired direction. Operator and passenger must never attempt this maneuvering by placing feet outside of the vehicle. Experience will teach you how much lean to put into turns at different speeds and how much you will have to lean into a slope to maintain proper balance.

Generally, the riding position for best balance and control is sitting. However, the posting, kneeling or standing positions are also used under certain conditions.

MARNING

Do not attempt any maneuvers if they are beyond your abilities.

Sitting

Feet on the running boards, body midway back on seat is an ideal position when operating the snowmobile over familiar, smooth terrain. Knees and hips should remain flexible to absorb shocks.



Posting

A semi-sitting position with the body off the seat and the feet under the body in a sort of squatting posture, thus allowing the legs to absorb the shocks when traveling over uneven terrain. Avoid abrupt stops.



Kneeling

This position is achieved by placing one foot firmly on the running board and the opposite knee on the seat. Avoid abrupt stops.



Standing

Place both feet on the running boards. Knees should be flexed to absorb the shock from surface bumps. This is an effective position to see better and to shift weight as conditions dictate. Avoid abrupt stop.



Rider Position (Reverse Operation)

When operating in reverse:

- Ensure the path behind is clear of obstacles or bystanders before proceeding in reverse. BRP recommends sitting on your snowmobile when operating in
- Avoid standing up. Your weight could shift forward against throttle lever while operating in reverse, causing an unexpected acceleration. Unexpected acceleration when snowmobile operates in reverse can cause a loss of control.

Fast reverse while turning, could result in loss of stability and control.

Riding with Passenger(s)

This vehicle is designed for one (1) operator and as many passengers as there are seats with straps or handholds installed on the vehicle conforming to SSCC standards. Passenger must only sit on designated passenger seat.

A WARNING

- Never carry a passenger on a seat not approved by BRP.
- Never allow anyone to sit between the handlebar and the operator.

Even when a passenger is allowed, this person must be physically fit for snowmobiling.

Any passenger must always be able to firmly lay his feet on the footrests and keep his hands on the handholds or seat strap when seated. Respecting those physical criteria is important to ensure that the passenger is stable and to reduce the risks of ejection. Falls can result in severe injury or death.

The operator has a responsibility to ensure the safety of his passenger and should inform the passenger about snowmobiling basics.

Before riding the vehicle, adjust suspension according to weight. Refer to Tune Your Ride subsection for more details

Ask your passenger to inform you to slowdown or stop immediately if he feels uncomfortable or insecure during the ride.

When going over bumps, riders(s) may raise their body slightly off the seat to absorb the shocks with their legs.

An unforeseen bump can leave you passenger-less. Remind your passenger to lean into the turn with you, without causing the vehicle to topple. Be extremely careful, go more slowly and check the passenger frequently. Keep a watchful eve on your passenger while riding.

Braking ability and steering control are reduced when riding with a passenger. Decrease speed and allow extra space to maneuver.

Riding Alone

Venturing out alone with your snowmobile could also be hazardous. You could run out of fuel, have an accident, or damage your snowmobile. Remember, your snowmobile is capable of traveling further in half an hour than you may be able to walk in a day. Use the "buddy system". Always ride with a friend or member of your snowmobile club. Even then, tell someone where you are going and the approximate time you plan to return.

Riding in a Group

Before starting out, designate a "trail boss" to lead the party and another person to follow-up at the end of the party. Ensure that all members of the party are aware of the proposed route and destination. When riding with others, limit your abilities to the experience of others. Never overtake the trail boss or, for that matter, any other snowmobile. Use down-the-line hand signals to indicate hazards or intent of direction change. It's important to keep a safe distance between each snowmobile but each one behind the leader should know the position of the machine ahead

Hand Signals

Every snowmobiler should relay any signal to the ones behind. Make sure this is legal where you are driving your snowmobile.

| STOP Raise either hand straight above your head. | RO | EFT TURN Extend your left hand straight out in the proper direction. | A A |
|---|----|---|-----|
| RIGHT TURN Extend the left arm and raise the hand to a vertical position so it forms a right angle at the elbow. | | SLOWING DOWN Left hand extended out and down from the side of the body with downward flapping motion of | |

| | | hand to signal warning or caution. | |
|---|-----|---|--|
| FOLLOWING SNOWMO BILES Arm raised, elbow bent with thumb pointing backward, in hitch-hicking motion move arm forward to backward over your shoulder. | | ONCOMING SNOWMO BILES Left arm raised at shoulder height, elbow bent and forearm verticl, wrist bent, move arm from left to right over head pointing to right side of trail. | |
| LAST SNOWMO BILE IN LINE Left arm raised at should height, elbow bent and forearm vertical with hand clenched in a fist. | E C | | |

Light Signals

As an alternative to the hand signals, a light signal system can be installed on your snowmobile. Whether it is an OEM or after-sales system, it consists basically in a 2 colors LED light that signals you are followed by other riders, or you are the last rider. It allows the rider to keep both hands on the handlebar for more safety while crossing other riders

Visit you BRP snowmobile dealer for more information.

| MODE 1 : DEFAULT. | WHITE light |
|---|--------------------------------------|
| MODE 2 : CAUTION, RIDERS BEHIND ME. | AMBER (LEFT SIDE ONLY) light |
| MODE 3: BEWARE, I'M THE LAST SLED IN THE GROUP , OR ALONE. | GREEN light |
| MODE 4 : CAUTION, THERE'S A HAZARDOUS SITUATION, OR BEWARE, I'VE STOPPED. | AMBER (BOTH SIDES FLASHING) light |
| MOUNTED ON HANDLEBAR | MOUNTED ON HANDLEBAR |
| | |

Avoiding Collisions

Wherever riding your vehicle always be on the look-out for the unexpected. Operate defensively. Scan constantly for people, objects, conditions and upcoming vehicles. In the trail, always stay on the appropriate side - as per country regulation - to avoid collision, especially when the field of vision is reduced. E.g.: Before a hilltop and a curve. Use extra caution whenever off-trail.

Always keep a safe distance from other snowmobiles and bystanders. Tailgating another snowmobile should be avoided. If the snowmobile in front of you slows for any reason, its operator and passenger could be harmed through your neglect. Maintain a safe stopping distance between you and the snowmobile in front of you. Depending on the terrain condition, stopping may require a little more space than you think. Play it safe. Be prepared to use evasive driving.

On land or water, fog or visibility-limiting snow can form. If you must proceed into the fog or heavy snow, do so slowly with your lights on and watch intently for hazards. If you are not sure of your way, do not

proceed. Keep a safe distance behind other snowmobilers to improve visibility and reaction time.

Riding Behaviors

Injury or death may result to the snowmobile operator, passenger or bystander if the snowmobile is used in risky conditions which are beyond the operator's, passenger's or snowmobile's capabilities or intended use.

Remember, promotional material may show risky maneuvers performed by professional riders under ideal and controlled conditions. You should never attempt any such risky maneuvers if they are beyond your level of riding ability.

Jumping can be a hazardous situation. It requires practice and should be done in a known and controlled environment. Never attempt jumping in a trail. A loss of control could lead to an impact with different elements like rock or tree, or with another snowmobile. When jumping be prepared for landing to absorb the shock. Brace yourself for the impact and your knees must be flexed to act as shock absorbers.

Also, an uneven or mined surface in the trail could be enough to kick upward the snowmobile and generate an impact or a loss of control. When "gunning" the throttle, the vehicle digs into and leaves an irregular snow surface for others. So protect the other users by not spinning the track in the middle of the trail.

Speeding

Excessive speed and reckless driving can be fatal. Always adjust your speed according to snow conditions and circumstances. In many cases, you cannot react or respond quickly enough to the unexpected. Always ride at a speed which is suitable to the trail, weather conditions and your own ability. Know your local rules. Speed limit may be in effect and meant to be observed.

Moving Parts

Stay away from the track. Personal injury will result if contact is made with the rotating track.

To prevent serious injury to individuals near the snowmobile:

- Never stand behind or near a moving track
- Always use a wide-base snowmobile stand with a rear deflector panel if it is necessary to rotate track
 When the track is raised off the ground, only run it at the lowest
- When the track is raised off the ground, only run it at the lowest possible speed. Centrifugal force could cause debris, damaged or lose studs, pieces of torn track, or an entire severed track to be violently thrown backwards out of the tunnel with tremendous force

RIDE SAFELY

- Never operate the engine without the belt guard securely installed
- Never operate the vehicle without the brake disk guard securely installed
- Never operate the vehicle with the side panels opened, or the hood removed

Know Terrain and Riding Variations

Groomed Trail

On a maintained trail, sitting is the most preferred riding position. Do not race and, above all, keep to the right hand side of the trail. Be prepared for the unexpected. Observe all trail signs. Do not zigzag from one side of the trail to the other.

Ungroomed Trail

Unless there has been a fresh snowfall you can expect "washboard" and snowdrift conditions. Taken at excessive speeds, such conditions can be physically harmful. Slow down. Hold on the handlebar and assume a posting position. Feet should be under the body assuming a crouched position to absorb any jarring effect. On longer stretches of "washboard" trails, the kneeling position of one knee on the seat can be adopted. This provides a certain amount of comfort, while at the same time keeps the body loose and capable of vehicle control. Beware of hidden rocks or tree stumps partially hidden by a recent snowfall.

Deep Snow

In deep "powder" snow, your vehicle could begin to "bog" down. If this occurs, turn in as wide an arc as possible and look for a firmer base. If you do get "bogged", and it happens to everyone, do not spin your track as this makes the vehicle sink deeper. Instead, turn the engine off, get off and move the back of the vehicle onto new snow. Then tramp a clear path ahead of the vehicle. A few feet will generally suffice. Restart the engine. Assume the standing position and rock the vehicle gently as you steadily and slowly apply the throttle. Depending on whether the front or rear end of the vehicle is sinking, your feet should be placed on the opposing end of the running boards. Never place foreign material beneath the track for support. Do not allow anyone to stand in front of, or to the rear of, the snowmobile with the engine running. Stay away from the track. Personal injury will result if contact is made with the revolving track.

Frozen Water

Traveling frozen lakes and rivers can be fatal. Avoid waterways. If you are in an unfamiliar area, ask the local authorities or residents about the ice condition, inlets, outlets, springs, fast moving currents or other hazards. Never attempt to operate your snowmobile on ice that may

be too weak to support you and the vehicle. Operating a snowmobile on ice or icy surfaces can be very dangerous if you do not observe certain precautions. The very nature of ice is foreign to good control of a snowmobile or any vehicle. Traction for starting, turning or stopping is much less than that on snow. Thus, these distances can be multiplied manyfold. Steering is minimal, and uncontrolled spins are an ever present danger. When operating on ice, drive slowly with caution. Allow yourself plenty of room for stopping and turning.

Slush

Slush should be avoided at all times. Always check for slush before starting across any lake or river. If dark spots appear in your tracks, get off the ice immediately. Ice and water can be thrown rearward into the path of a following snowmobile. Getting a vehicle out of a slush area is strenuous and in some cases, impossible.

Uphill

There are two types of hills you can encounter — the open hill on which there are few trees, cliffs or other obstacles, and a hill that can only be climbed directly. On an open hill, the approach is to climb it by side hilling or slaloming. Approach at an angle. Adopt a standing position with both feet on the same running board. Keep your weight on the uphill side at all times. Maintain a steady, safe speed. Continue as far as you can in this direction, then switch to an opposite hill angle and riding position.

A direct climb could present problems. Choose the standing position, accelerate before you start the climb and then reduce throttle pressure to prevent track slippage.

In either case, vehicle speed should be as fast as the incline demands. Always slow down as you reach the crest. If you cannot proceed further, don't spin your track. Apply the parking brake, turn the engine off, free the skis by pulling them out and downhill, place the rear of the snowmobile uphill, restart the engine, release the parking brake and ease it out with slow even throttle pressure. Position yourself to avoid tipping over, then descend.

Downhill

Downhill driving requires that you have full control of your vehicle at all times. On steeper hills, keep your center of gravity low and both hands on the handlebar. Maintain slight throttle pressure and allow the machine to run downhill with the engine operating. If a higher than safe speed is reached, slow down by braking but apply the brake with frequent light pressure. Never jam the brake and lock the track.

Side Hill

When crossing a side hill or traversing up or downhill, certain procedures must be followed. All riders should lean towards the slope as required for stability. The preferred operating positions are the standing position, with both feet on the running board that is facing uphill. Be prepared to shift your weight quickly as needed. Side hills and steep slopes are not recommended for a beginner or a novice snowmobiler.

Avalanche Hazard

When riding on mountainous terrain, you should be aware of the risk of avalanches. Avalanches vary in size and shapes and generally occur in steep terrain and on unstable snow.

New snow, animals, people, wind and snowmobiles can all trigger an avalanche. Avoid high marking or traversing steep terrain when avalanche conditions are possible. When in unstable snow conditions, travel should be restricted to lower angle slopes. Wind formed cornices should be avoided. Staying off unstable conditions is the key to safe mountain riding. Probably most important is to be aware of the conditions and dangers on a daily basis when in the mountains. Check local avalanche forecasts and threats each day before heading out to ride and heed forecasters advice.

You should always carry a snow shovel, probe and avalanche beacon while riding on mountains.

Bright Sunshine

Bright sunny days can considerably reduce your vision. The glare from sun and snow may blind you to the extent that you cannot easily distinguish ravines, ditches or other obstacles. Goggles with colored lenses should always be worn under these conditions.

Night Rides

The amount of natural and artificial light at a given time can affect your ability to see or to be seen. Be extra cautious. Drive at speeds that will allow you to stop in time when you see an unknown or dangerous object ahead. Stay on established trails and never operate in unfamiliar territory. Be sure both headlights and taillight are working and clean.

Unfamiliar Territory

Whenever you enter an area that is new to you, drive with extreme caution. There may be obstructions hidden beneath the snow. Go slow enough to recognize potential hazards such as fences or fence posts, brooks crossing your path, rocks, sudden dips, guy wires and countless other obstacles which could result in a termination of your snow-mobile ride.

Driving off established trails and in the woods requires reduced speed and increased vigilance. Driving too fast in an area can make even minor obstacles very hazardous. Even hitting a small rock or stump could throw your snowmobile out of control and cause injury to its riders. Even when following existing tracks, be cautious. Travel at a speed so you can see what is around the next bend or over the top of the hill.

Hidden Wires

Always be on the lookout for hidden wires, especially in areas that may have been farmed at one time or another. Too many accidents have been caused by running into wires in the fields, guy wires next to poles and roads, and into chains and wires used as road closures. Slow speeds are a must.

Riding Uneven Surfaces

Unplanned jumps of snowdrifts, snowplow ridges, culverts, indistinguishable objects or sudden drop in the trail can be dangerous. You can avoid them by wearing the proper color lenses or face shields and by operating at a lower speed.

A good way to help seeing these terrain variations is to wear the proper color lenses or face shields and by operating at a lower speed. Crouch (stand) towards the rear of the vehicle and keep the skis up and straight ahead. Apply partial throttle and brace yourself for the impact. Knees must be flexed to act as shock absorbers.

Road Crossing

Your snowmobile is not designed to operate or turn on pavement of public streets, roads or highways. Avoid road traveling. If you must do so, and it is permitted, reduce speed and stay on the edge of the way where you can find snow to help providing capabilities to maintain directional control.

As snowmobile trails often cross roadways it is important for riders to know the proper crossing procedures. When approaching a roadway, signal to others that you are stopping at the intersection and slowly come to a complete stop back from the road's edge. In some cases, you will be approaching the road from a ditch or snowbank. Choose a place where you know you can climb without difficulty. Stop completely at the top of the bank and wait for all traffic to clear. Then, look carefully in both directions before crossing at a 90° angle. If needed, assume a standing position to look both ways. Be wary of parked vehicles. When you are certain that the road is clear proceed straight across the intersection without hesitation. Each rider needs to come to a complete stop, look both ways and then proceed when the roadways is clear of oncoming traffic.

Railroad Crossing

Never ride on railroad tracks. It is illegal. Railroad tracks and railroad rights-of-way are private property. A snowmobile is no match for a train. Before crossing a railroad track, stop, look and listen.

Respect of the Wildlife

Wildlife compliments your snowmobiling day. Snowmobile tracks provide firm ground over which animals can travel from area to area. Do not violate this privilege by chasing or harassing wildlife. Fatigue and exhaustion can lead to animal's death. Avoid areas posted for the protection or feeding of wildlife. If you happen to be fortunate enough to see an animal, stop your snowmobile and observe quietly.

Carbon Monoxide (CO) Poisoning

All engine exhaust contains carbon monoxide (CO), a deadly gas. Breathing carbon monoxide can cause headaches, dizziness, drowsiness, nausea, confusion and eventually death.

Carbon monoxide is a colorless, odorless, tasteless gas that may be present even if you do not see or smell any engine exhaust. Deadly levels of carbon monoxide can collect rapidly, and you can quickly be overcome and unable to save yourself. Also, deadly levels of carbon monoxide can linger for hours or days in enclosed or poorly ventilated areas.

If you experience any symptoms of carbon monoxide poisoning, leave the area immediately, get fresh air and seek medical treatment.

To prevent serious injury or death from carbon monoxide:

- Never run the vehicle in poorly ventilated or partially enclosed areas such as garages, carports or barns. Even if you try to ventilate engine exhaust with fans or open windows and doors, carbon monoxide can rapidly reach dangerous levels.
- Never run the vehicle outdoors where engine exhaust can be drawn into a building through openings such as windows and doors.
- Never stand next to the vehicle while the engine is running. A person standing next to the vehicle when the engine is running may inhale high concentrations of exhaust fumes.

After riding, always remove the tether cord from the engine cut-off switch to avoid unauthorized use by children or others and to prevent starting in a closed environment (ex: garage).

Gasoline Fires and Other Hazards

Gasoline is extremely flammable and highly explosive. Fuel vapors can spread and be ignited by a spark or flame many feet away from the engine. To reduce the risk of fire or explosion, follow these instructions:

- Use only an approved gasoline container to store fuel.
- Strictly adhere to instructions in Vehicle Fueling Procedure.
- Never start or operate the engine if the fuel cap is not properly installed.
- Use only a BRP approved LinQ fuel caddy to carry extra fuel on the vehicle. It should be properly installed and secured.

Gasoline is poisonous and can cause injury or death.

- Never siphon gasoline by mouth.
- If you swallow gasoline, get any in your eye or inhale gasoline vapor, visit your doctor immediately.
- If gasoline spills on you, wash with soap and water and change your clothes.

Burns from Hot Parts

Certain components may become hot during operation. Avoid contact during and shortly after operation to avoid burns.

PRACTICE EXERCISES

Practice alone the following exercises after having done the entire Pre-ride inspection. Always start and stop the engine according to the instructions in ENGINE STARTING PROCEDURE and SHUTTING OFF THE ENGINE in BASIC PROCEDURES. Don't forget to attach the tether cord to your jacket.

Where to Practice Exercises

Find a suitable area to practice the exercises. Ensure the area meet the following requirements:

- No traffic
- No obstacles
- Hard packed snow
 - Ample space to maneuver.

Exercises to Practice

Practice alone the following exercises after having done the entire Pre-ride inspection. Always start and stop the engine according to the instructions in ENGINE STARTING PROCEDURE and SHUTTING OFF THE ENGINE in BASIC PROCEDURES. Don't forget to attach the tether cord to your jacket.

Using the Emergency Engine Stop Switch

Purpose: Become familiar with the operation of throttle lever and to become familiar with using the engine stop switch.

Directions:

- With the parking brake engaged, start the engine and let idle until it reaches the operation temperature.
- Use the engine stop switch to shut the engine off. Press the switch with your right thumb while keeping your hand on the handgrip.
- Restart the engine and repeat the exercise. No idle time is required.

Tips for additional practice:

- Press the emergency engine stop switch without looking at it.

Starting, Stopping and Basic Handling

Purpose:

- Learn throttle control and how to get the vehicle moving.
- Become familiar with low speed deceleration and braking.

If you feel like you are losing control while doing this exercise, release the throttle to stop accelerating and apply the brake as needed to slow down. You can also use the engine stop switch to cut power entirely.

Directions: At first, you will only use the throttle for a moment at a time, then release it and coast.

- Start the engine and release the parking brake lever.
- Slowly apply throttle until the vehicle starts to creep forward. As soon as you start moving release the throttle and coast, then press the brake lever to stop.
- Continue with this part of the exercise until you are comfortable with applying and releasing the throttle.

Engine Stop While in Motion

Purpose: Become familiar with using the emergency engine stop switch when in motion so you know how the vehicle will react if you need to use it later.

Directions:

- Partway down the straightaway, while operating at 8 km/h (5MPH), toggle the engine stop switch to OFF position and coast to a stop.
- Restart the engine and repeat the exercise. Try increasing your speed (to a maximum of 20 km/h (12MPH) before using the engine stop switch.

In an emergency, the snowmobile engine can be stopped by pressing down on the emergency engine stop switch or by pulling the tether cord cap from the engine cut-off switch, while applying brake.

Basic Turns

Purpose: Get comfortable turning in a controlled manner on both sides.

Directions:

- Roll in a straight line at low speed and make a wide arcing turn.
 Make sure there is enough space to perform the entire turn.
- Repeat right and left turns and maintain a steady speed bellow 8km/h (5MPH). Hold the throttle to maintain your low speed.
- Leaning forward and into the curve may help you to turn the handlebar more easily.

Quick Stops

Purpose:

- Become familiar with the vehicle braking ability.
- Learn to apply brakes with maximum efficiency.

This exercise is like what you did before, except you'll be applying the brake more firmly, working up to braking at the maximum without locking the track rotation. Always release the throttle completely for quick stops. If you apply throttle and brake at the same time, your stopping distance will be longer.

| 'n | re | ^t | 11 | ۱n | c. |
|----|----|----|----|----|----|
| | | | | | |

PRACTICE EXERCISES

- Start at one end of the straightaway and accelerate to 8 km/h (5MPH). Partway down the straightaway, release the throttle completely and brake quickly.
- Keep head and eyes up, keep handlebar straight, and do not release the brake until fully stopped.
- Repeat, increasing your speed and braking harder. When you feel
 that the rotation of the track will be stopped you need to release
 the pressure on the break lever. To maintain control, you need to
 keep the track in rotation.

Operating in Reverse

Purpose: Become familiar with the vehicle handling and turning radius in reverse.

Directions:

- Shift into reverse and remain seated. Refer to SHIFTING IN RE-VERSE in BASIC PROCEDURES.
- Check that the area behind you is clear. While looking backwards, slowly reverse and stop by releasing throttle and using the brake, just like when operating normally.
- Keep your speed low and do not back up for long distances.
- Repeat the reverse and stop in straight line until you get comfortable.
- Once you are comfortable with reversing in straight line, you can slowly reverse while turning the handle bar.

FUFLING

Fuel is flammable and explosive under certain conditions.

- Never use an open flame to check fuel level.
- Never smoke or allow flame or spark in vicinity.
- Always proceed in a well-ventilated area.

Fueling Procedure

- Stop engine and engage the parking brake.
- 2. Have operator and passenger get off the vehicle. Do not sit or lean on seat when fuel tank cap is not properly installed.
- 3. Unscrew slowly the fuel reservoir cap counterclockwise to stabilize pressure before removing it.

NOTE:

A short whistling sound is normal.

- Insert the spout into the filler neck.
- Pour fuel slowly so that air can escape from the tank and prevent fuel flow back. Be careful not to spill fuel.
- 6. Stop filling after the release of the gas pump nozzle handle and wait a moment before removing the spout. Do not retract the gas pump nozzle to put more fuel into the fuel tank. **Do not overfill**.

 7. Reinstall the fuel cap and fully tighten clockwise.
- 8. Always wipe off any small fuel spillage from the vehicle. If a major spillage occurs, remove side panels to remove fuel vapors from engine compartment before starting.
- 9. Before getting on the way don't forget to disengage the parking brake.
- 10. Never top up the fuel tank before placing the vehicle in a warm area. As temperature increases, fuel expands and may overflow.

INJECTION OIL

Injection Oil is flammable when heated.

- Never use an open flame to check oil level.
- Never smoke or allow flame or spark in vicinity.
- Always proceed in a well-ventilated area.

Refer to Injection Oil in Vehicle Information to add oil.

TRANSPORTING THE VEHICLE

Make sure that oil reservoir and fuel tank caps are properly installed.

Many type of trailer can be used to transport a vehicle. Tilt-bed, flatbed or enclosed trailers, no matter the trailer used, always proceed with precaution when driving the vehicle on and off of it.

Always anchor the vehicle securely, front and rear, even on short hauls. Use appropriate tie-down straps only. Make sure all equipment is securely fastened. Cover the vehicle to prevent road grime from causing damage.

Make sure the trailer meets state or provincial requirements. Ensure the hitch and safety chains are secured, and the brake, turn indicators and clearance lights are functional.

A WARNING

Make sure all seats, accessories and cargo are properly secured, or remove it to prevent from falling on the road and creating a hazard for following vehicles.

⚠ WARNING

Do not tow the vehicle facing backwards. If the vehicle is towed facing backwards, the wind may cause damage to the windshield or even loss of the windshield.

IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED STATES)

Vehicle Safety Labels

These labels are affixed to the vehicle for the safety of the operator, passenger or bystanders.

The following labels are on your vehicle and they should be considered permanent parts of the vehicle. If missing or damaged, the decals can be replaced free of charge. Visit an authorized BRP snowmobile dealer.

NOTE:

In the event of any discrepancy between this guide and the vehicle, the safety labels on the vehicle have precedence over the labels in this guide.


Shock Absorber - Warning Label

This label is applied directly on the shock absorber.




- This shock absorber is pressurized.
- An explosion may occur if heated or punctured.
- Do not disassemble.

Pulley Guard and Drive Pulley Tightening Torque - Warning and Notice Label

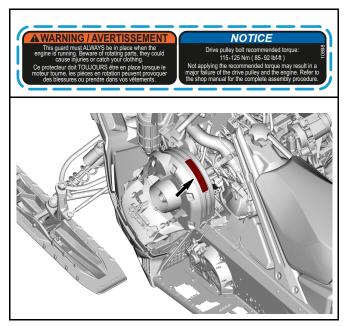

Clicker Adjustment - Notice Label

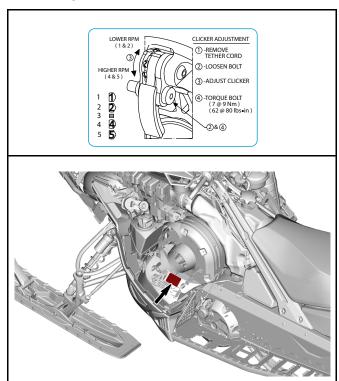


Disk Guard - Warning Label



This guard must ALWAYS be in place except when servicing.



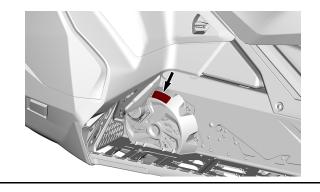

Correct Towing Direction - Warning Label

⚠ WARNING

- ALWAYS tow this vehicle facing forward.
 NEVER tow this vehicle facing backward. Windshield could detach and become a road hazard.





Disconnect Fuel Injectors - Warning Label

epresenterait un risque connecteurs electriques foujours débrancher les allumer des vapeurs ıne étincelle pourrai étincelles. Autrement d'essence, ce qui erifier la production es deux injecteurs essence avant de




Always electrically disconnect

both fuel injectors prior to testing for ignition spark. may ignite in presence of Otherwise, fuel vapors a spark creating a fire


516007661 hazard.



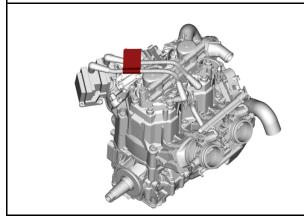


Possible Burn - Warning Label



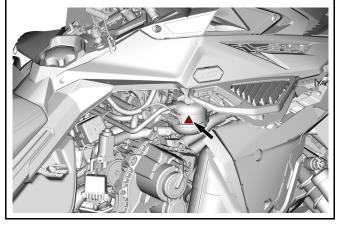

Rotating Parts — Warning Label

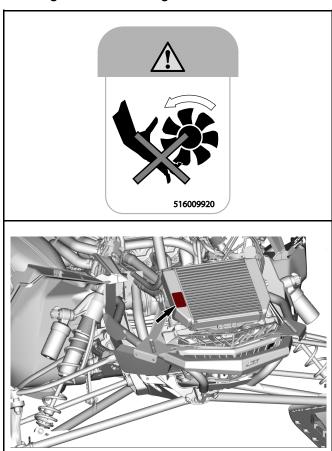

Starting Procedure - Warning Label

⚠ WARNING

- Read and understand all safety labels, locate and read the operator's guide and watch the safety video (using the QR code link or visit Ski-Doo web site) before operation.
- Respect laws on minimum operator age. Manufacturer recommends a minimum operating age of 16 years old.
- ALWAYS wear ear protection.
- Get familiar with your vehicle. Inexperienced riders may overlook risks and be surprised by vehicle's specific behavior and terrain conditions. Ride slowly.
- Excessive speed and reckless driving can kill.
- ALWAYS adjust your speed according to snow conditions and circumstances.
- Steering control and braking ability may be reduced on hard-pack snow, ice or roads. Reduce speed & allow more space to stop or turn.
- Never open side panels or hood while engine is running or if vehicle is in motion. Ensure to remove tether cord from post before opening those.

Before starting

- Attach tether cord to your clothing.
- Turn handlebars all the way in both directions to check for interference and insure free operation.
- Check proper operation of the throttle and brake levers each time before starting. They must return to their initial position when released.
- Apply parking brake.


After Starting:

- Push in the emergency engine stop switch to check if engine shuts off.
- 2. Re-start and pull-out tether cord to check if engine shuts off.
- Re-start. Disengage parking brake before riding to avoid brake fading.

IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED STATES)




Passenger Safety - Warning Label

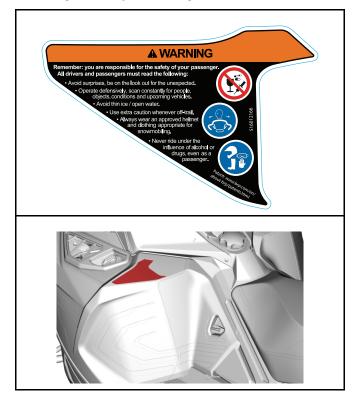

Passenger Safety - Warning Label

↑ WARNING

This vehicle is design for one (1) operator and as many passengers as there are seats with straps or handgrips installed on the vehicle conforming to SSCC standards.

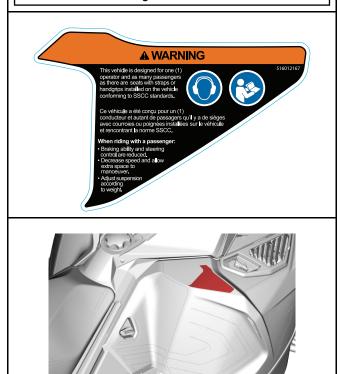


Beware of Hot Parts - Caution Label

A CAUTION


Beware of hot parts.



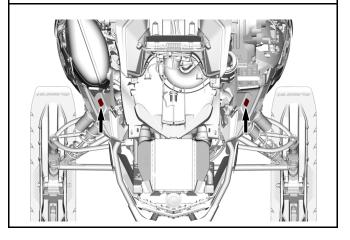


Recommended Oil - Notice Label

Refer to the *Technical Specifications* for appropriate injection oil type for your vehicle engine.

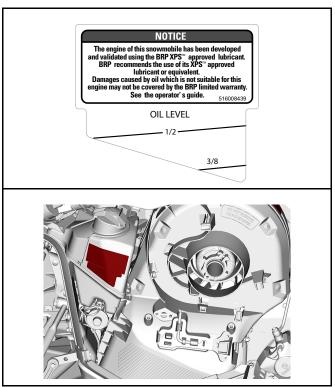


Maximum Cargo Load - Warning Label

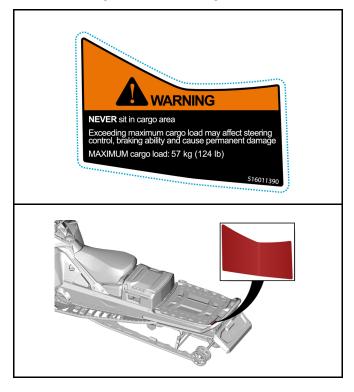


Track Studding — Warning Label

AWARNING


Before studding this track, consult the Operator's Guide included with this vehicle for all details pertaining to track studding. If this track can be studded, use special BRP approved studs ONLY. Studding this track with conventional studs may cause studs to tear off of track and separate from vehicle posing a potential risk of severe injury or death.



Rotating Track — Warning Label

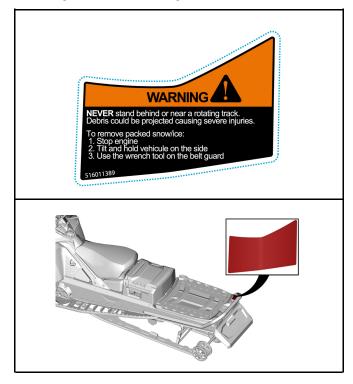


Rear Storage Compartment - Warning Label

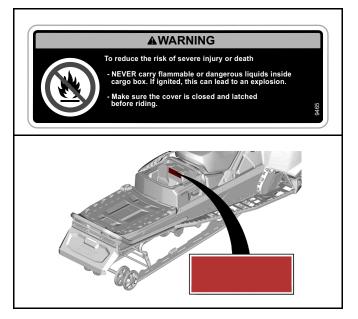


Technical Information Labels

Recommended Oil - Notice Label

Refer to the *Technical Specifications* for appropriate injection oil type for your vehicle engine.




RECOMMENDED OIL - NOTICE LABEL

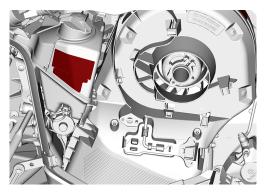


IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED STATES)

Adjustment Tools Label

- Install suspension adjustment tool first. (Illustrated red on label) Install pulley expander and Headlight adjustment tool second. (Illustrated blue on label)
- Refer to Tools in Equipment.

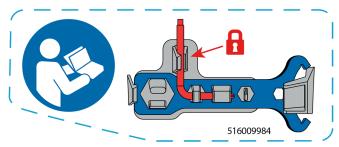

ADJUSTMENT TOOLS

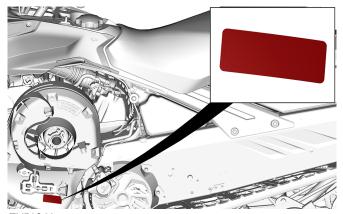

TYPICAL

Recommended Fuel — Notice Label


Refer to the *Technical Specifications* for appropriate fuel type for your vehicle engine.



AKI (RON+MON)/2 OCTANE RATING - NOTICE LABEL



RON OCTANE RATING - NOTICE LABEL

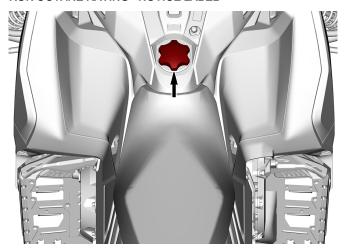

Hang Tag(s)

EPA Certified Hang Tag

VEHICLE MODEL NAME:

ENGINE DESCRIPTION:

NER (NORMALIZED EMISSION RATE) = ON 0 TO 10 SCALE, 0 BEING THE CLEANEST. **BOMBARDIER RECREATIONAL PRODUCTS INC** *NO TO BE REMOVED PRIOR SALE.



MODÈLE DU VÉHICULE:

DESCRIPTION DU MOTEUR:

TEN (TAUX D'EMISSION NORMALISÉ) = SUR UNE ÉCHELLE DE 0 À 10, 0 ÉTANT LE PLUS PROPRE. BOMBARDIER PRODUITS RÉCRÉATIFS INC. *NE PAS ENLEVER AVANT LA VENTE.





California Proposition 65 Warning

⚠WARNING: Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information, go to www.P65Warnings.ca.gov/passenger-vehicle.

▲ WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, wear gloves or wash your hands frequently when servicing your vehicle.

For more information, go to www.P65Warnings.ca.qov

3 3



IMPORTANT ON-PRODUCT LABELS (CANADA/UNITED STATES)





RECTO VERSO

IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/UNITED STATES)

This vehicle comes with a hang tag and labels containing important safety information.

Any person who rides this vehicle should read and understand this information before riding.

Vehicle Safety Labels

These labels are affixed to the vehicle for the safety of the operator, passenger or bystanders.

The following labels are on your vehicle and they should be considered permanent parts of the vehicle. If missing or damaged, the decals can be replaced free of charge. Visit an authorized BRP snowmobile dealer.

NOTE:

In the event of any discrepancy between this guide and the vehicle, the safety labels on the vehicle have precedence over the labels in this guide.


Shock Absorber - Warning Label

This label is applied directly on the shock absorber.



- This shock absorber is pressurized.
- An explosion may occur if heated or punctured.
- Do not disassemble.

Pulley Guard and Drive Pulley Tightening Torque - Warning and Notice Label

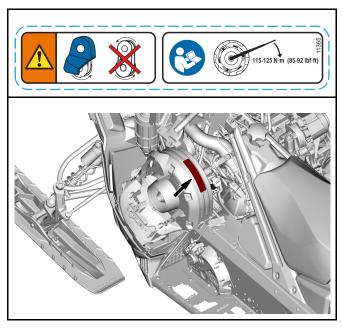


Disk Guard - Warning Label

⚠ WARNING This guard must ALWAYS be in place except when servicing.

Clicker Adjustment - Notice Label

- 1. Remove tether cord.
- Remove pulley expander from pulley guard.
- Loosen bolt.
- 4. Adjust clicker.
- Torque bolt.

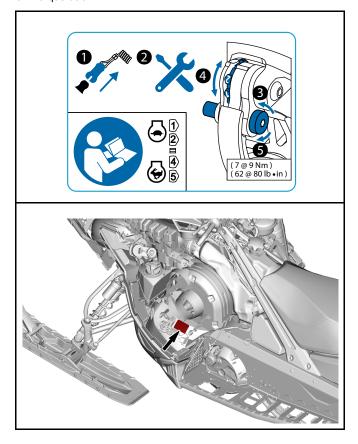

Correct Towing Direction - Warning Label

A WARNING

- ALWAYS tow this vehicle facing forward.
 NEVER tow this vehicle facing backward. Windshield could detach and become a road hazard.






Disconnect Fuel Injectors - Warning Label


⚠ WARNING

- Always electronically disconnect both fuel injectors prior to testing for ignition spark.
- Otherwise fuel vapors may ignite in presence of a spark creating a fire hazard.

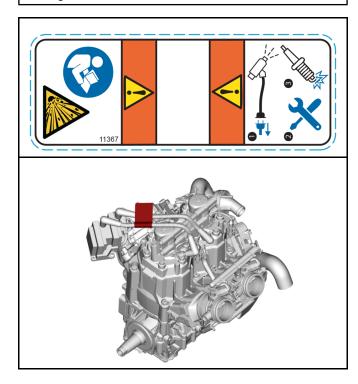


Possible Burn - Warning Label



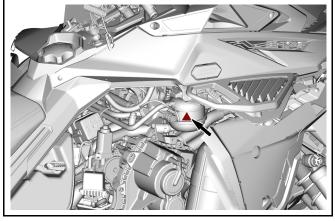

Rotating Parts — Warning Label



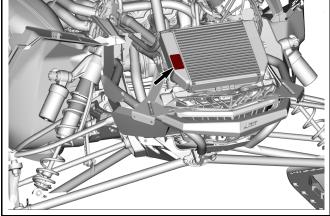

Starting Procedure - Warning Label

⚠ WARNING

- Read and understand all safety labels, locate and read the operator's guide and watch the safety video (using the QR code link or visit Ski-Doo web site) before operation.
- Respect laws on minimum operator age. Manufacturer recommends a minimum operating age of 16 years old.
- ALWAYS wear ear protection.
- Get familiar with your vehicle. Inexperienced riders may overlook risks and be surprised by vehicle's specific behavior and terrain conditions. Ride slowly.
- Excessive speed and reckless driving can kill.
- ALWAYS adjust your speed according to snow conditions and circumstances.
- Steering control and braking ability may be reduced on hard-pack snow, ice or roads. Reduce speed & allow more space to stop or turn.
- Never open side panels or hood while engine is running or if vehicle is in motion. Ensure to remove tether cord from post before opening those.


Before starting

- Attach tether cord to your clothing.
- Turn handlebars all the way in both directions to check for interference and insure free operation.
- Check proper operation of the throttle and brake levers each time before starting. They must return to their initial position when released.
- Apply parking brake.

After Starting:

- Push in the emergency engine stop switch to check if engine shuts off.
- Re-start and pull-out tether cord to check if engine shuts off.
- Re-start. Disengage parking brake before riding to avoid brake fading.

IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/ UNITED STATES)

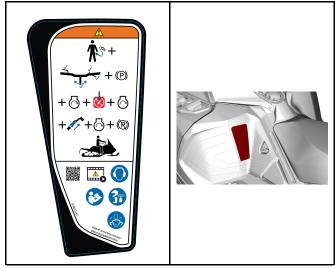

Passenger Safety - Warning Label

A WARNING


Remember: you are responsible of the safety of your passenger.

All drivers and passengers must read the following:


- 16 years old is the minimum age required to drive this vehicle.
- Use extra caution whenever off-trail.
- Avoid thin ice/ open water.
- Never ride under the influence of alcohol or drugs, even as passenger.

When riding with a passenger:

- Braking ability and steering control are reduced.
- Decrease speed and allow extra space to maneuver.
- Adjust suspension according to weight.

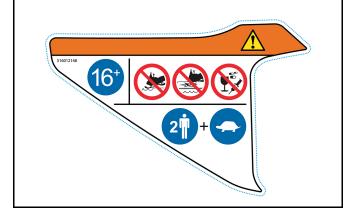


IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/ UNITED STATES)

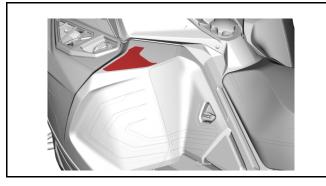

Passenger Safety - Warning Label

⚠ WARNING

This vehicle is design for one (1) operator and as many passengers as there are seats with straps or handgrips installed on the vehicle conforming to SSCC standards.

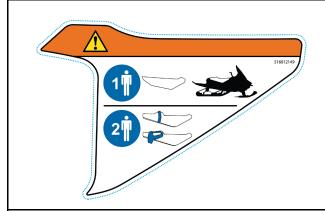




Beware of Hot Parts - Caution Label

A CAUTION

Beware of hot parts.




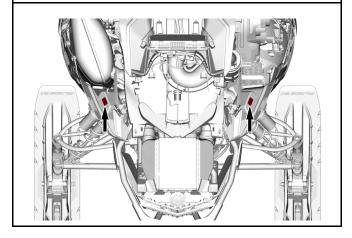


IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/ UNITED STATES)

Recommended Oil - Notice Label


Refer to the *Technical Specifications* for appropriate injection oil type for your vehicle engine.

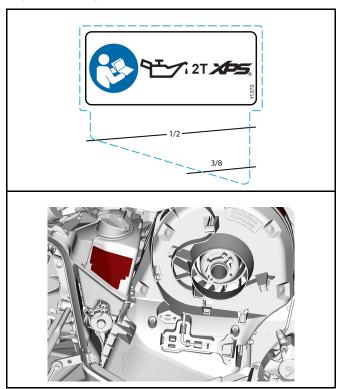

Maximum Cargo Load – Warning Label

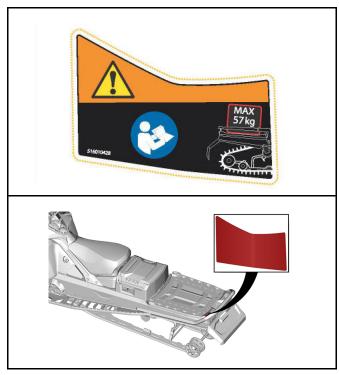

Track Studding — Warning Label

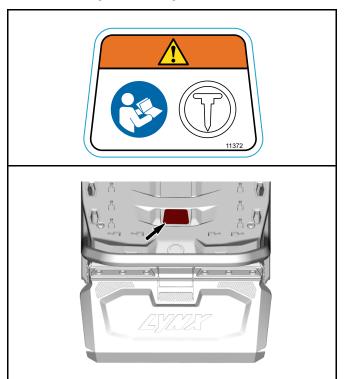



Rotating Track — Warning Label

⚠ WARNING

-NEVER stand behind or near a rotating track. Debris could be projected causing severe injuries. To remove packed snow/ice, stop engine, lift and hold vehicle on the side and use wrench tool on the belt guard.

- NEVER sit in cargo area.



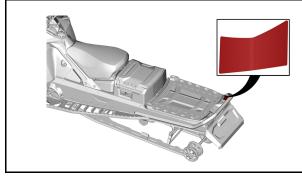



Rear Storage Compartment - Warning Label

⚠ WARNING

To reduce the risk of severe injury or death:

- Never carry flammable or dangerous liquids inside cargo box. If ignited, this can lead to an explosion. Make sure the cover is closed and latched before riding.

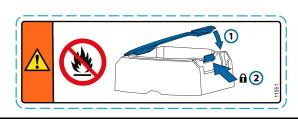


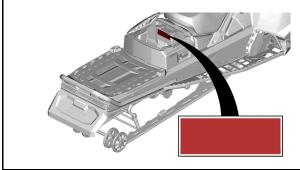

Technical Information Labels

Recommended Oil - Notice Label

Refer to the *Technical Specifications* for appropriate injection oil type for your vehicle engine.







IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/ UNITED STATES)

Adjustment Tools Label

- Install suspension adjustment tool first. (Illustrated red on label) Install pulley expander and Headlight adjustment tool second. (Illustrated blue on label)
- Refer to Tools in Equipment.

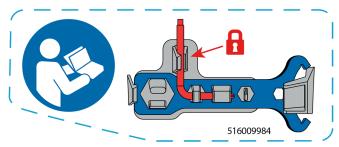

ADJUSTMENT TOOLS

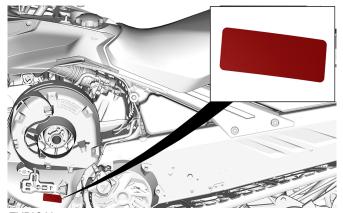

TYPICAL

Recommended Fuel — Notice Label


Refer to the *Technical Specifications* for appropriate fuel type for your vehicle engine.



AKI (RON+MON)/2 OCTANE RATING - NOTICE LABEL




RON OCTANE RATING - NOTICE LABEL

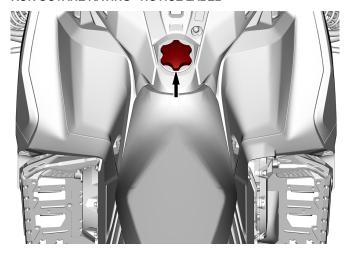

IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA/ UNITED STATES)

Hang Tag(s)

Large Panoramic 7.8" Wide LCD Display Hang Tag

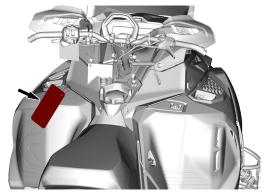

IMPORTANT ON-PRODUCT LABELS (ALL COUNTRIES EXCEPT CANADA) UNITED STATES)





RECTO VERSO

PRE-RIDE INSPECTION

Perform a pre-ride inspection before each ride to detect potential problems during operation. The pre-ride inspection can help you monitor wear and deterioration before they become a problem. Correct any problems that you discover to reduce the risk of an accident or a malfunction.

Before Starting the Engine

- Remove snow and ice from body including lights, seat, footrests, controls and instruments.
- Remove packed snow and ice from the rear suspension using the wrench tool stored on the drive belt guard.
- Verify that air silencer prefilter is free of snow.
- Verify that skis and steering operate freely. Check corresponding action of skis versus handlebar.
- Check fuel and injection oil for levels and leaks. Replenish if necessary and in case of any leaks; you should seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.
- All storage compartments must be properly latched and they must not contain any heavy or breakable objects. Hood and side panels must be also properly latched.
- Activate the throttle control lever several times to check that it operates easily and smoothly. It must return to idle position when released.
- Activate the brake lever and make sure the brake fully applies before the brake control lever touches the handlebar grip. It must fully return when released.
- Apply parking brake and check if it operates properly. Leave parking brake applied.
- Inspect drive belt condition and height. Refer to drive belt in maintenance procedures.

After Engine is Started

For proper engine starting procedure, refer to the appropriate *Engine Starting Procedure*.

 Check headlights high beam and low beam, taillight, stop light and pilot lamps operation.

NOTE:

You may need to detach tether cord from your clothes to check lights. In such a case, attach cord as soon as you get back at the controls of the snowmobile.

- Check the engine cut-off switch (by pulling tether cord cap) and emergency engine stop switch operation.
- 3. Release parking brake.
- 4. Refer to Vehicle warm up and follow instructions.

| 98 | SAFETY INFORMATION | |
|----|--------------------|--|
| | | |

Pre-Ride Check List

| ITEM | OPERATION | |
|--|---|--|
| BODY INCLUDING SEAT, FOOTRESTS, LIGHTS, AIR FILTER, CONTROLS AND INSTRUMENTS | Check condition and remove snow or ice. | |
| SKIS AND STEERING ACTION | Check for free movement and proper operation. | |
| SKI RUNNERS | Check for abnormal wear. | |
| FUEL | Check for proper level and no leaks. | |
| INJECTION OIL (IF APPLICABLE) | Check for proper level and no leaks. | |
| COOLANT | Check for proper level and no leaks. | |
| DRIVE BELT | Check for cracks, fraying or abnormal wear and proper height. | |
| THROTTLE LEVER | Check for proper operation. | |
| BRAKE LEVER | Check for proper operation. | |
| PARKING BRAKE, BRAKE | Check for proper operation. | |
| BRAKE FLUID | Check for proper level and no leaks. | |
| STORAGE COMPARTMENT | Check for proper latching and no heavy or breakable objects. | |
| TRACK | Check condition and remove snow or ice. For studded tracks, refer to <i>Traction Enhancing Products</i> . | |
| SLIDER SHOES | Check for abnormal wear. | |
| EMERGENCY ENGINE STOP SWITCH AND ENGINE CUT-OFF | Check for proper operation. Tether cord must be attached to operator clothing eyelet. | |

PRE-RIDE INSPECTION

| SWITCH (TETHER CORD CAP) | | |
|-----------------------------|-----------------------------|--|
| LIGHTS | Check for proper operation. | |
| HORN BUTTON (IF EQUIPPED) | Check for proper operation. | |

100 _____SAFETY INFORMATION _____

REPORTING SAFETY DEFECTS

In Canada, if you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform Transport Canada in addition to notifying Bombardier Recreational Products Inc.

If Transport Canada receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, Transport Canada cannot become involved in any individual problems between you, your dealer or Bombardier Recreational Products Inc.

To contact Transport canada:



819-994-3328 (Gatineau-Ottawa area or internationally) Toll free: 1 800-333-0510 (in Canada)



Transport Canada - ASFAD 330 Sparks Street Ottawa, ON K1A 0N5



https://www.tc.gc.ca/recalls

| | MATION |
|--|--------|
| | |
| | |

This page is intentionally blank

VEHICLE INFORMATION

PRIMARY CONTROLS

Handlebar

The handlebar controls the steering of the snowmobile. As the handlebar is rotated to right or left, the skis are turned right or left to steer the snowmobile

↑ WARNING


Fast reverse while turning, could result in loss of stability and control.



TYPICAL


Throttle Lever

Throttle lever is located on the RH side of handlebar.

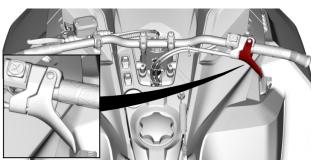

TYPICAL

Designed to be thumb activated. When squeezed, it increases the engine speed. When released, engine speed returns automatically to idle

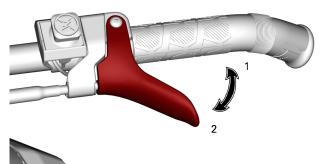

CABLE THROTTLE LEVER

- 1. To accelerate
- 2 To decelerate


⚠ WARNING

Test the throttle lever operation each time before starting the engine. The lever must return to the rest position once released. Otherwise, do not start engine.

Emergency Engine Stop Switch

The emergency engine stop switch is located on the RH side of handlebar.

PRIMARY CONTROLS

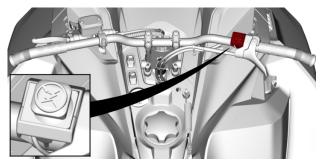

TYPICAL

To stop the engine in an emergency, push the switch down in OFF position and simultaneously apply the brake.



OFF POSITION

To allow engine starting, pull the switch up in ON position.



ON POSITION

All operators of the snowmobile should familiarize themselves with the function of the emergency engine stop switch by using it several times on first outing and whenever stopping the engine thereafter. This engine stopping procedure will become a reflex and will prepare operators for emergency situations requiring its use.


A WARNING

If the switch has been used in an emergency caused by a suspected malfunction, the source of the malfunction should be determined and corrected before restarting engine. Visit an authorized BRP snowmobile dealer for servicing.

Brake Lever

Brake lever is located on the LH side of handlebar.

When squeezed, brake is applied. When released, it automatically returns to the rest. Braking effect is proportional to the pressure applied on the lever and to the type of terrain and its snow coverage.

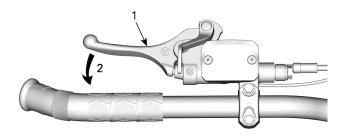

TYPICAL

- 1. Brake lever
- 2. To apply brake

Brake Lever Adjustment


↑ WARNING

It is important to adjust the brake lever to the user size and normal riding position.

Proper brake lever position should allow:

- Good support for the index and middle finger on the lever.
- Use the outer end of the lever to optimize the force.
- Proper wrist alignment.

Taking the time to adjust and try out the brake lever before your first snowmobile outing improves user comfort.

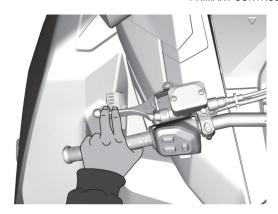


Adjusting the Brake Lever Models with Aluminum Handlebar and Reservoir


 Loosen the two bolts enough to easily move the brake lever on the handlebar.

NOTE:

If the two bolts are not loosen enough the brake lever can leave marks on the handlebar.

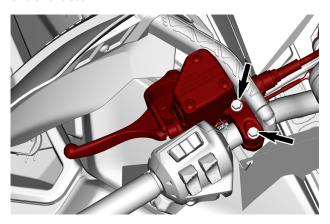

Locate the reference mark on the handlebar and respect the distance and rotation limits.

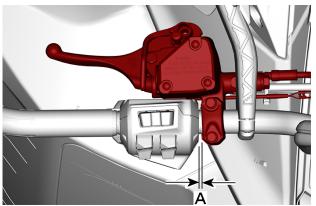


A. 0 to 15 mm (0 to 0.590 in) between the side of the multifunction switch and the side of the brake lever

3. With the operator on the driver's seat, put the brake lever in the desired position.

| TIGHTENING TORQUE | | |
|------------------------------|----------------------------------|--|
| Brake lever adjustment bolts | 8.5 ± 1.5 Nm (75 ± 13 lbf-in) | |

Parking Brake Lever

Parking brake lever is located on the LH side of handlebar.

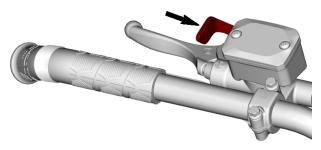

TYPICAL


Parking brake should be used whenever snowmobile is parked.

WARNING

Make sure parking brake is fully disengaged before operating the snowmobile. When you ride the vehicle, brake pads that are caused to drag by a continuous pressure on the lever may cause damage to the brake system and cause loss of braking capacity and/or fire.

To Engage Parking Brake

Apply and hold brake, then lock brake lever using the parking brake lever as shown.

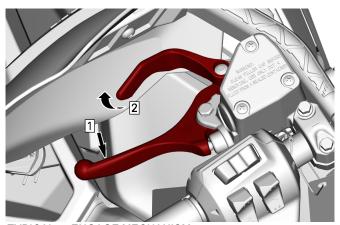

TYPICAL — ENGAGE MECHANISM


- 1. Apply and hold brake
- 2. Lock brake lever using parking brake lever

To Release Parking Brake

Squeeze brake lever. Parking brake lever will automatically return to its original position. Always release parking brake before riding.

Engine Cut-off Switch

On models using a D.E.S.S. key, this key is also the engine cut-off switch.

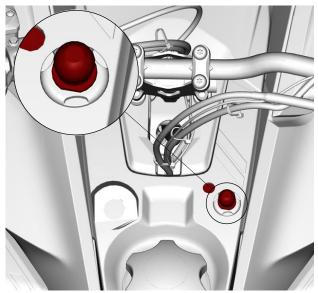

TYPICAL

The engine cut-off switch (tether cord) is located on the console.

The tether cord cap must be securely snapped on the engine cut-off switch to allow vehicle operation.

Pulling the tether cord cap from the switch shuts the engine off.

⚠ WARNING

Always attach the tether cord eyelet to clothing before starting the engine.

D.E.S.S. (Digitally Encoded Security System)

The tether cord cap has an integrated D.E.S.S. key to provide you and your snowmobile with the equivalent security of a conventional lock key.

The D.E.S.S. key contains an electronic chip which features a unique permanently memorized digital code.

PRIMARY CONTROLS

Your authorized BRP snowmobile dealer has programed the D.E.S.S. of your snowmobile to recognize the D.E.S.S. key in the tether cord cap to allow vehicle operation.

If another tether cord is used without programming the D.E.S.S., the engine will start but will not reach drive pulley engagement speed to move vehicle.

Make sure the tether cord cap is free of dirt or snow.


D.E.S.S. Flexibility

The D.E.S.S. of your snowmobile can be programmed by your authorized BRP snowmobile dealer to accept up to 8 different keys.

We recommend the purchase of additional tether cords from your authorized BRP snowmobile dealer. If you have more than one D.E.S.S. equipped BRP snowmobile, each can be programmed by your authorized BRP snowmobile dealer to accept the other vehicles D.E.S.S. keys.


SECONDARY CONTROLS

Multifunction Switch (if equipped)

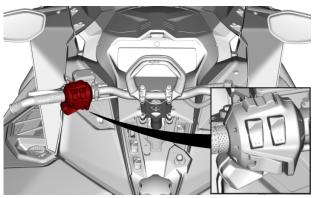

TYPICAL

Multifunction switch is located on the LH side of handlebar.

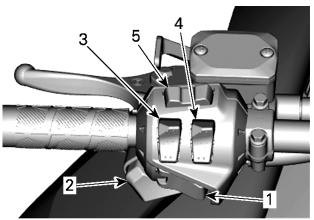

TYPICAL

- 1. Start/Electronic Reverse button
- Headlights dimmer switch
 Heated grips switch
 Heated throttle lever switch

- 5. Menu/set button

Start / Electronic Reverse Button

Press to start engine. Refer to Engine Starting Procedure in Basic Procedures.


Once engine is started, press to engage the electronic reverse. Refer to *Shifting in Reverse* in *Basic Procedures* for procedure.

Headlights Dimmer Button

Press to select HI or LOW beam. Lights are automatically ON when the engine is running.

Heated Grips Switch


Depress switch as required to select heating intensity to keep your hands at a comfortable temperature.

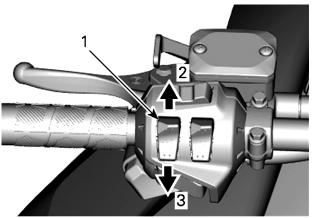

VARIABLE INTENSITY

- Heated grip switch
- 2. Increase heat
- Decrease heat

The heating intensity is displayed via the digital display.

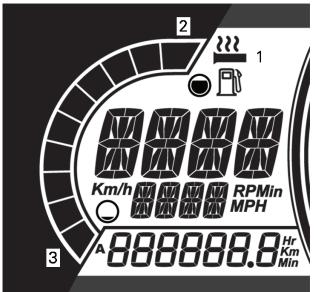

MODELS WITHOUT THE LARGE PANORAMIC 7.8" WIDE LCD DISPLAY SHOWN

- 1. Heated grip icon
- 2. More heat
- 3. Less heat

There are ten intensity settings. When released, display will return to fuel level.

Heated grips will be in OFF position when there are no bars displayed on the gauge.

NOTE:


Under 2000 RPM, heated grips will be limited at 50%.

NOTF:

For models with the Large Panoramic 7.8" Wide LCD Display, refer to Large Panoramic 7.8" Wide LCD Display section.

Heated Throttle Lever Switch

Depress switch as required to select heating intensity to keep your thumb at a comfortable temperature.

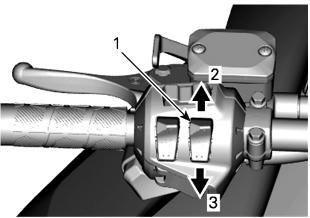


VARIABLE INTENSITY

- 1. Heated throttle lever switch
- 2. Increase heat
- 3. Decrease heat

NOTE:

There are ten intensity settings. When released, display will return to engine temperature.

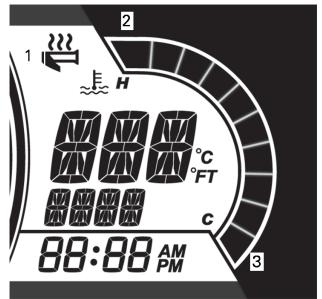

MODELS WITHOUT THE LARGE PANORAMIC 7.8" WIDE LCD DISPLAY SHOWN

- 1. Heated grip icon
- 2. More heat
- 3. Less heat

Heated throttle lever will be in OFF position when there are no bars displayed on the gauge.

NOTE:

Under 2000 RPM, heated throttle lever will be limited at 50%.

NOTE:


For models with the Large Panoramic 7.8" Wide LCD Display, refer to Large Panoramic 7.8" Wide LCD Display section.

Menu/Set Button

Models without the Large Panoramic 7.8" Wide LCD Display

SECONDARY CONTROLS

This button is used to manage the information displayed on the multifunction gauge.

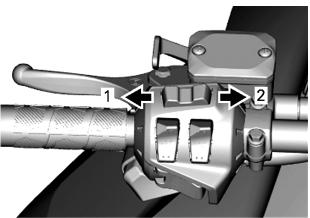

MENU/SET BUTTON


- 1. Menu function
- 2. SET function

Refer to Gauge for complete information.

Audio Volume Control (if equipped)

Models with the Large Panoramic 7.8" Wide LCD Display

This button is used to manage the information displayed on the multifunction gauge or answer/cancel a phone call.

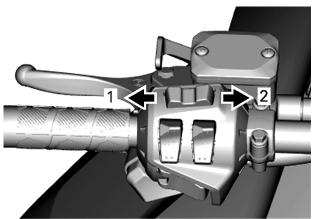


- Volume DOWN/Cancelling a call
 Volume UP/Answering a call

Refer to Large Panoramic 7.8" Wide LCD Display section for complete information

Rotary Control (if equipped)


The rotary control is located on the left side of the console.

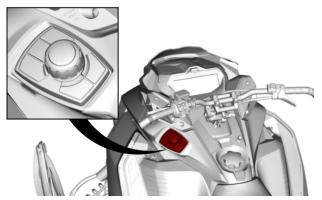

TYPICAL

It is used to navigate into the LCD display and control the audio system.

- Seek/Play/Pause buttons allow to control volume and music listened in the helmet audio system.
- The center knob can be used to navigate inside menu or select and set settings.
- Specific vehicle data button allow to see engine temperature, and battery voltage. It will also shown air suspension adjustment (if equipped)
- BRP Connect button: quick access to already downloaded APPS.

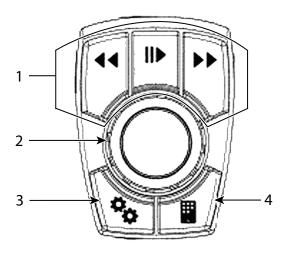

- 1. Audio control
- 2. Center knob
- 3. Vehicle data button
- 4. BRP Connect

When audio source is selected, the Preset/Seek buttons work as follow:


- Short press: Previous or Next Preset
- Long press: Seek up or down

When Bluetooth audio source is selected, the Preset/Seek buttons work as follow:

- Left: Previous song
- Right: Next song

Rewind Starter Handle

Xterrain STD

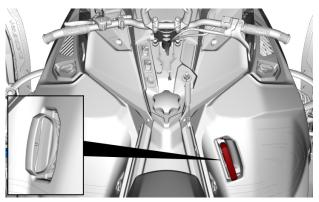


TYPICAL

Auto-rewind type located on right hand side of snowmobile. To engage mechanism, pull handle slowly until a resistance is felt then pull vigorously. Slowly release handle.

NOTE:

The maximum torque that can be transmitted to the engine by the rewind starter is 80 Nm (59 lbf-ft). The maximum force that can be exerted on the on the rope is 2 200 N (494.6 lbf).

All other models

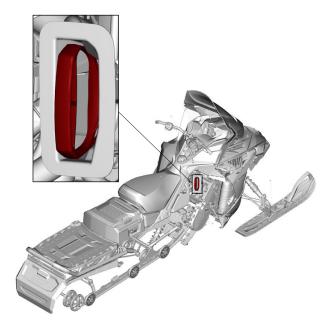

Auto-rewind type located on right hand side of snowmobile under the side panel. Open right hand side panel to access the rewind starter handle. Refer to *Removing the Side Panels* in this subsection. To engage mechanism pull handle slowly until a resistance is felt then pull vigorously. Slowly release handle.

NOTE:


The maximum torque that can be transmitted to the engine by the rewind starter is 80 Nm (59 lbf-ft). The maximum force that can be exerted on the on the rope is 2 200 N (494.6 lbf).

Horn Button (if equipped)

For vehicles sold in Finland

Press on the horn button to activate the horn.

SECONDARY CONTROLS

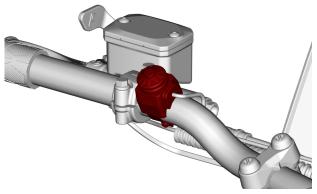

TYPICAL

GAUGE - 7.2" DIGITAL DISPLAY

Multifunction Display



- Select the upper or center display by using the MENU (M) button on the multifunction switch. Refer to Secondary Controls for Menu/ Set button location.
- While the desired display is flashing, navigate through the display, by using the SET (S) button on the multifunction switch.

Once the desired information is displayed, press the MENU (M) button or wait 5 seconds to confirm.

To reset

- Average speed
- Top speed
- Total fuel consumption

Press and hold the SET (S) button while display is flashing.

Lower Display




May display the following:

- Settings
- Messäges

The SPEED display shows the Maximum and the averaged speed. Hold MENU button for 3 seconds to reset.

Left Lateral Display

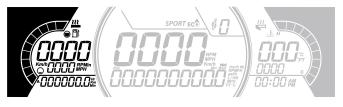

The left lateral display includes:

- Fuel level indicator
- Heated Grip level
- Trip distance A and B (Km or mph)
- Cumulative hours
- Speed
- RPM
- Odometer

Right Lateral Display



The right lateral display includes:

- Engine Temperature
- Heated throttle indicator
 - Clock

Central Display



Display the vehicle speed in Km/h (or MPH) or the RPMs. Refer to Settings.


Warning Lamps and Indicators

The following indicator lamps will alert you to a vehicle condition that may become serious. Some lamps will illuminate when starting the vehicle to make sure they work. If any lamps remain on after starting the vehicle, refer to the respective system warning lamp for further information

NOTE:

Some warning indicators appear in the display of the multifunction gauge and function the same as an indicator lamp but do not display when starting the vehicle.

Telltale Lights - Lower Bar

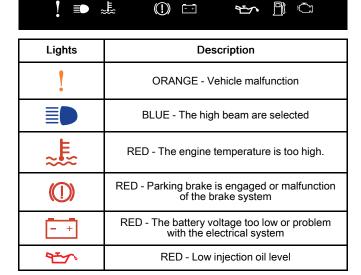

| Lights | Description |
|----------|---|
| | ORANGE - Low fuel level |
| (| ORANGE Turn on: Malfunction of the vehicle emissions control system Blink: Engine problems, the limp home mode is activated. Have the vehicle serviced immediately. |

Settings

Setup

Using MENU button, select **SETTINGS** and hold to enter setting menu. Various options are available such as swapping the SPEED and RPM in the Central Display.

Unit Selection

This multifunction gauge is factory preset in metric units but it is possible to change it to imperial units.

Using MENU button, select UNITS and hold button to change units.

Setting Clock

Using MENU button, select CLOCK and hold to change units.

- 1. Press MENU button to select clock display.
- Push and hold MENU button for 1 second.
- 3. Press MENU button to select 12:00 AM PM or 24:00 time base.
- Push and hold MENU button or OK button to acknowledge selection
- 5. Press MENU button to change hours (hours flash).
- Push and hold MENU button or OK button to acknowledge hour selection
- Push MENU button to switch to minutes (minutes flash).
- 8. Press MENU button to change minutes.

Setting Language

The gauge display language can be changed. Refer to an authorized BRP snowmobile dealer for language availability and to setup the gauge to your preference.

GAUGE - LARGE PANORAMIC 7.8" WIDE LCD DISPLAY

Basic Functions

LCD Display

Default Display



Multifunction Display



Left Lateral Display

The left lateral display includes:

- Fuel level indicator
- Engine temperature
- Speedometer
- Tripmeter
- Rpm
- Clock
- Driving modes
- Warning pop-up



PRINCIPAL VIEW

- Heated grips Heated thumb



SECONDARY VIEW - HEATED ELEMENTS

To select the value to be displayed in the tripmeter;

- Access the Stats/Trip screen
 Select and activate the desired set of statistic to be shown (Trip A, Trip B or Total)

Right Lateral Display

The right lateral display includes:

- Tachometer
- Audio volume
- Audio output indicator
 - Menu
 - **BRP Connect**
 - Phone
 - Statistics
 - Audio
 - Settings



STATS/TRIPS VIEW



SETTINGS VIEW

Navigating in the Digital Display

⚠ WARNING

Reading or tampering with the multifunction gauge can distract you from the operation of the vehicle, particularly from constantly scanning the environment. Always pay attention to road conditions, ensure your environment is clear and free from obstacles. Furthermore, when riding, only glance at the multifunction gauge briefly to maintain awareness of road conditions.

The multifunction gauge includes analog gauges (speedometer and tachometer), indicator lamps and an infotainment center with a digital screen.

We recommend you practice selecting some functions on the infotainment center before getting on the road. You will get used to them and they will be easier to use on the road.

Use the rotating control to control the display functions. Refer to Rotary Control in Secondary Controls.

Pressing the center knob will get the Menu selection in the right screen, in this order:

- BRP Connect
- Phone
- Statistics
- Audio
- Settings

When an icon is selected, its related screen will appear.



SETTINGS VIEW

When an item is selected, this sets the item to the current value.

Warning Lamps and Indicators

The following indicator lamps will alert you to a vehicle condition that may become serious. Some lamps will illuminate when starting the vehicle to make sure they work. If any lamps remain on after starting the vehicle, refer to the respective system warning lamp for further information.

NOTE:

Some warning indicators appear in the display of the multifunction gauge and function the same as an indicator lamp but do not display when starting the vehicle.

Telltale Lights - Lower Bar



| Lights | Description |
|-------------|--|
| ! | ORANGE - Vehicle malfunction |
| | BLUE - The high beam are selected |
| <u>₩</u> }} | RED - The engine temperature is too high. |
| | RED - Parking brake is engaged or malfunction of the brake system |
| + | RED - The battery voltage too low or problem with the electrical system |
| \$ 1 | RED - Low engine oil pressure (if applicable) |
| | ORANGE - Low fuel level |
| Ç | ORANGE Turn on: Malfunction of the vehicle control systems Blink: Engine problems, the limp home mode is activated. Have the vehicle serviced immediately. |

Icons and Indicators - Multifunction Display

| Icon | Description |
|--------------|------------------------------------|
| ll | Smartphone Network connection |
| * | Bluetooth device |
| <u> </u> | Smartphone battery level indicator |
| | Helmet pairing indicator |
| <u> </u> | Fuel indicator |
| _ <u>[</u>] | Temperature indicator |
| 6 | Helmet audio output |

Settings

Menu

BRP Connect



Before using BRP Connect, the BRP GO! app must be downloaded to the phone. The app can be downloaded from the Apple App Store or Google Play Store via a simple search. Not all phones are compatible.

Visit our website for more details

www.brpconnecttutorial.com

NOTE:

The smartphone must be connected with a USB cable to the USB port located in the glove box.

User's personal data will be deleted from the cluster when phone pairing is deleted.

User agree that personal data (contact list and call history) be transferred to the cluster when smartphone is connected.

Contact list and call history are stored in cluster permanently. To delete these information you must un-pair your smartphone or overwrite using another smartphone.

NOTE:

The apps can also reach directly by pressing the APPS button located at the bottom of the rotary control.

Phone



The phone menu is to access:

- The phone history
 The phone contact list

NOTE:

To have access to the Phone menu, a phone and rider helmet (Headset) must be paired. Refer to Pair your Smartphone Via Bluetooth.

Statistics



The Statistics menu is used to get:

- Trip distance information
- Trip elapsed time information
- Instant fuel consumption
- Average fuel consumption
- Maximum speed

Average speed

3 sets of statistics are kept in memory. Each set of statistic can be reset independently.

Press knob to enter into the stats/trip screen.

Move the knob left or right to select another trip.

Press the knob to exit this screen and validate your selection.

Audio

Allow to control volume and music listened in the helmet audio system.

Gives also song informations when available.

Settings



The Settings menu is to:

- Adjust clock
- Pair Bluetooth devices
 - Phone
 - Rider headset
 - Passenger headset
- Adjust the display (brightness and Mode (AUTO/DAY/NIGHT)
- Adjust the units (Imperial/Metric)
- Set the language
- Get information about firmware version and device regulatory compliance
- Show vehicle fault codes

Pairing your Smartphone Via Bluetooth

On the Vehicle

- Short press the rotary control knob to access menu.
- Go to "Settings" and move the knob RIGHT.
- Select "Bluetooth" and move the knob RIGHT.
- 4. Select "Phone" and move the knob RIGHT.
- Select "Add Phone" and press the knob RIGHT.

Bluetooth is now visible.

On the Phone

Activate your phone's bluetooth function.

Refer to your manufacturer's user guide for detailed procedure.

- Choose "BRP Connect"
- 3. A confirmation number will appear on your phone screen and the vehicle gauge screen. Make sure these numbers match.
- Press Pair on your phone and select the green check mark on the vehicle gauge
- Allow Contacts and Favorite Sync on your phone

Pairing a Helmet

To pair a helmet, go to the "Settings" page and select "Add helmet".

BRP GO! App

1) Download the BRP GO! Smartphone App

Download the BRP GO! app via the App Store for Apple™ or the Google™ Play Store for Android.

2) Download Apps Compatible With BRP Connect

Visit our website to know more about the compatible apps. These apps will improve your riding experience. Some apps may require additional purchase to be compatible with the system or may require additional devices to be used.

www.brpconnecttutorial.com

3) Connect your smartphone using your charging / data transfer cable

It is recommended to use an original charging cable from the smartphone OEM to optimize transfer between the phone and the vehicle. Use the front USB port.

- 1. Unlock your phone screen
- 2. Connect your phone charging cable
- A checkmark will appear on your phone screen once the connection is done

4) Access your Apps

Quick press the JOYSTICK to access Menu.

Push the joystick **UP** to select "Launch BRP Connect" and push the joystick **RIGHT**.

Select the app you would like to use and press the JOYSTICK.

- To leave the app, long press the JOYSTICK.
- To return to the Main Menu, press the BRP Connect Button.

NOTF:

The apps can also reach directly by pressing the APPS button located at the bottom of the rotary control.

Quick Tour of the BRP GO! App



 Playground: Select your playground to see content related to your vehicle. For snowmobiles, select the Snow playground.

- Navigation: Access all the navigation features of the app such as route planning, turn-by-turn navigation, friends location, offline navigation, and more. You can access thousands of snowmobile trails across North America and Europe on the map.
- BRP Connect: See the list of compatible apps that can be used on the vehicle's display. You can also access from there the Vehicle Connection Guide to help you connect your phone to your vehicle's display.
- FAQ: This link takes you to answers of common questions asked by riders like you. An internet connection is required.
- 5. Rides: Easily access your planned and completed rides made with the Navigation features of the BRP GO! app.
- Store: This link takes you to the online store of your vehicle. An internet connection is required.
- 7. Settings: Manage your profile and your account settings.

Messages in Multifunction Gauge

Important information about vehicle condition is displayed on the multifunction gauge. When starting the engine, always look at the gauge for any indicator lamps or special messages.

| Icon | | IESSAGE/ VARNING | CAUSE | WHAT TO DO |
|--------------|--------------|-----------------------------------|--|---|
| | \Diamond | BAD KEY | Defective key | Contact an authorized BRP snowmobile dealer. |
| NA | ۵ | WRONG KEY | Wrong key | Use the right key for the vehicle or contact an authorized BRP snowmobile dealer. |
| <u>₩.</u> }} | <u>#</u> .{{ | HIGH ENGINE TEMPERA TURE | Engine is overheat ing | Stop and wait for engine to cool off. Check for leaks. Check coolant level and adjust (see Maintenance procedures). |
| © | Δ | LIMP HOME MODE | Important engine manage ment compo nent | * Have the vehicle transported to the nearest authorized BRP snowmobile dealer. |

| Icon | | ESSAGE/ /ARNING | CAUSE | WHAT TO DO |
|--|---|-----------------------------|---------------------|---|
| 925 | ▲ | LOW OIL - STOP ENGINE | Low oil pressure | Check for oil leaks. Check oil level and adjust (see Maintenance procedures. |
| A combination of two different warnings can occur. | | | | |
| NA = Not applicable | | | | |

^{*} BRP recommends having the vehicle transport when in LIMP HOME. If you operate the vehicle in LIMP HOME, avoid abrupt maneuvers and immediately go to the nearest authorized BRP snowmobile dealer to have your vehicle serviced before riding again. In LIMP HOME, the engine RPM is limited and therefore the vehicle speed.

Important information messages can also be displayed temporarily to assist indicator lamps.

When a digital warning appears, it will show the warning for 6 seconds and then the warning will disappear for 60 seconds. During the 60 seconds, the small digital indicator will flash. This sequence will be repeated three times and then will stop for 15 minutes. During the 15 minutes only the indicator lamps will be activated.


EQUIPMENT

Operator's Guide

The Operator's Guide should be stored in the Front Storage Compartment.


Heated Cell Case (if equipped)

A heated cell case is mounted underneath the front storage compartment cover. It allows to keep your cell phone at a warm temperature while charging.

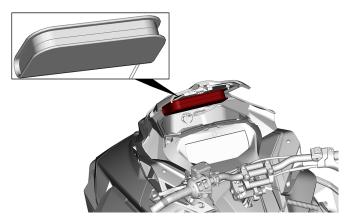

Power Outlet - USB (if equipped)

The USB power Outlet is located in the front storage compartment. It allows to charge your cell phone while stored in the heated cell case.

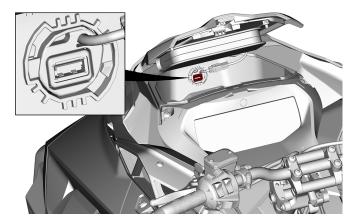

Mountain Strap


This handlebar strap shall be used only to provide additional pulling force when snowmobile is stuck in a slanted position. On an exceptional basis it can be used at very slow speed only, when standing on the right running board to bring the vehicle back on its desired path. When riding, both hands should remain on the handlebar grips to provide braking capability, as well proper steering and directional control. Do not use handlebar strap for towing, lifting or side hilling.

MARNING

Do not use while riding at speed. Steering control is highly reduced and brake control is not possible.

Electric Visor Jack Connector

An electric visor can be connected to the jack connector. A stress relief extension is supplied with the vehicle.

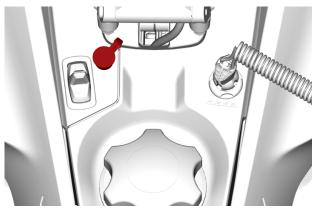

TYPICAL — DRIVER - ELECTRIC VISOR JACK CONNECTOR LOCATION

Drive Belt Guard

Removing the Drive Belt Guard

⚠ WARNING

NEVER operate engine:


- Without shields and belt guard securely installed.
- With hood and/or side panels opened or removed.

NEVER attempt to make adjustments to moving parts while engine is running.

NOTE:

Belt guard is purposely made slightly oversize to maintain tension on its pins and retainers preventing undue noise and vibration. It is important that this tension be maintained when reinstalling.

- 1. Remove tether cord cap from engine cut-off switch.
- 2. Open the LH side panel. See procedure in this section.
- 3. Remove retaining pin.

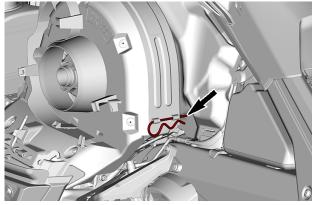


TYPICAL


4. Lift rear portion of guard then release from front tab.

Installing the Drive Belt Guard


1. Insert belt guard tab in front support slot.

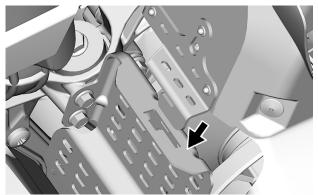

2. Push drive belt guard toward engine then toward front of vehicle.

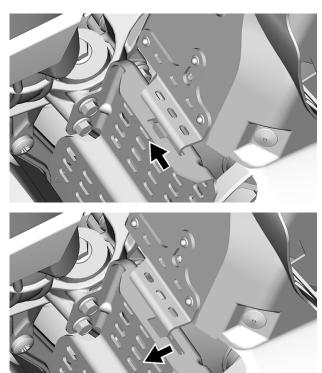

3. Position the rear portion of the belt guard over the retainer and secure it using the retaining pin.

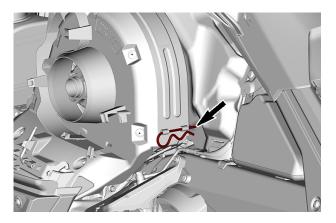

Spare Drive Belt Holder


A spare drive belt can be stored in a holder located on the drive belt guard.

NOTE:

The spare drive belt is not supplied with the snowmobile.

Position spare drive belt into drive belt guard slot.

EQUIPMENT

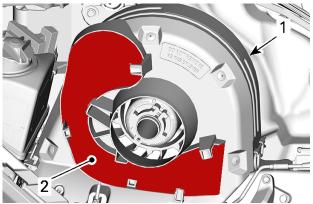

TYPICAL

- Drive belt guard
 Slot

Secure in place by sliding it behind the tabs.




TYPICAL

Tools

A part of the drive belt guard is designed to hold the tools allowing for basic maintenance

The tools are supplied with the vehicle. They should always be installed in their proper location and orientation.

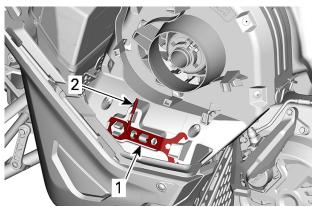

TYPICAL - DRIVE BELT GUARD TOOLS LOCATION

- 1. Suspension adjustment tool
- 2. Pulley expander and headlight adjustment tool

Install in the following sequence:

A CAUTION


Make sure tools are secured properly. Tools may detach and cause damage to rotating parts.

1. Slide the suspension adjustment tool open end under retaining tab.




SUSPENSION ADJUSTMENT TOOL


2. Press the closed end on the retaining tabs.

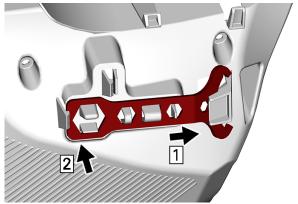

 Slide the Pulley expander and headlight adjustment tool short end into hole.




PULLEY EXPANDER AND HEADLIGHT ADJUSTMENT TOOL
4. Rotate and clip long end in place.

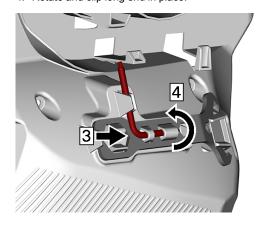


Rear Storage Compartment

A storage compartment is located at the rear of the seat.

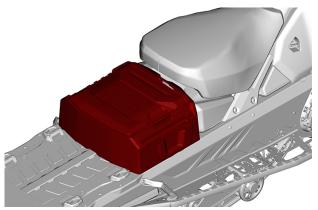

TYPICAL

To open, pull on the handle .

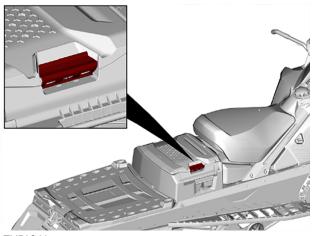


TYPICAL

BODY AND SEAT

Windshield

Removing the Windshield

- Place hands on each sides of the windshield.
- Pull the windshield up until all pins come out of there rubber grommets.

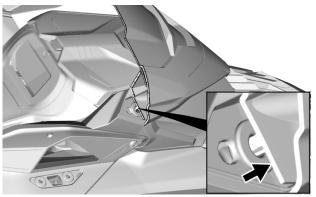

TYPICAL

Installing the Windshield

1. Lubricate the grommets using soapsuds, if required.

NOTICE

Do not lubricate grommets with any type of grease.


2. Insert all pins in the grommets.

Front Storage Compartment

A storage compartment is located at the front of the vehicle, above the gauge.

The Operator's Guide and the emergency starter rope are in the front storage compartment.

To open, push the button and lift the cover.

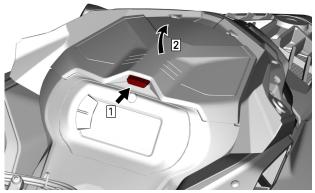

TYPICAL

NOTE:

When closing, make sure cover is secured properly. You will hear a "click".


Hood

Removing the Hood

1. Remove hood screws.



TYPICAL2. Pull the hood forward.

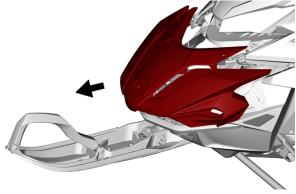

TYPICAL

Installing the Hood

The installation is the reverse of removal procedure. However, pay attention to the following.


1. Tighten the hood screws to specification.

| TIGHTENING TORQUE | | |
|-------------------|------------------------------|--|
| Hood Torx screw | 2.5 ± 0.2 Nm (22 ± 2 lbf-in) | |


Side Panel - 2 Latches type

Removing the Side Panels

1. Release all latches, then open panel.

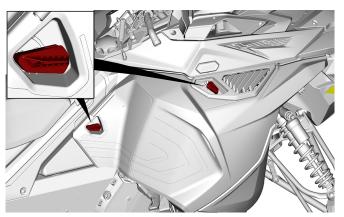


TYPICAL

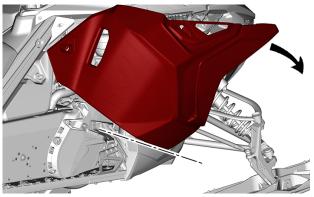

TYPICAL


2. Lift the side panel to disengage the tabs.

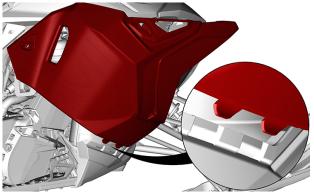


TYPICAL

Installing the Side Panels


1. Insert the tabs into the bottom pan.

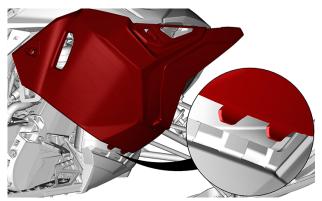

TYPICAL
2. Tilt the side panel and secure all latches.

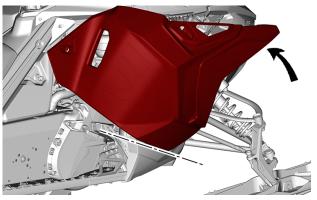

TYPICAL

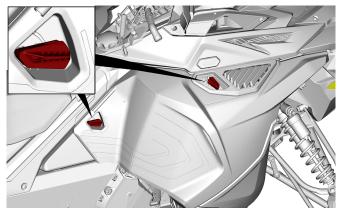


TYPICAL

Upper Body Module


Removing the Upper Body Module

Refer to procedures in this section and remove:


- Side panels
- Windshield
- Gauge support.
- Lift the storage compartment and disconnect the 12V power outlet connectors, if equipped, before removing the storage compartment.

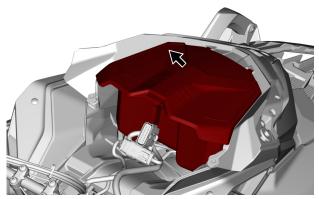


TYPICAL
2. Disconnect the MAPTS,, MGVIPM and headlight connectors.

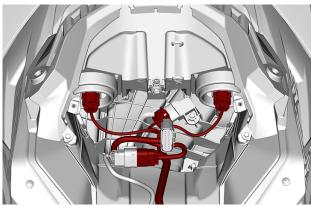


3. Loosen the air intake hose clamp.

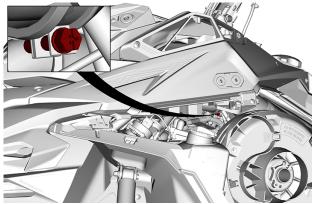


4. Remove the upper body module retaining screws.

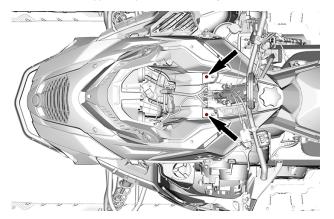

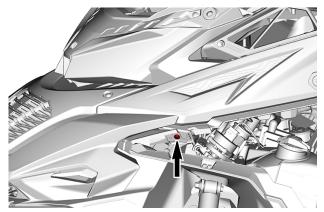

LH SIDE

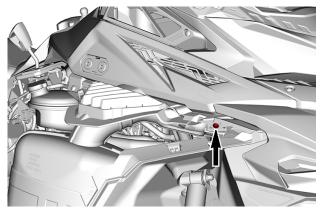

RH SIDE


- 5. Remove the upper body module.
 - Grab the upper body module in the gauge support section.
 Pull the module forward.

 - 3. Remove the module from the vehicle.


Installing the Upper Body Module

1. Install the upper body module.

- Hold the upper body module in the gauge support section.
 Push the module rearward.
- 3. Install the module on the vehicle.
- 2. Secure the upper body module with the previously removed retaining screws.

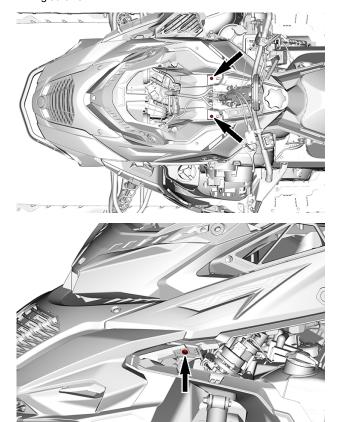

LH SIDE

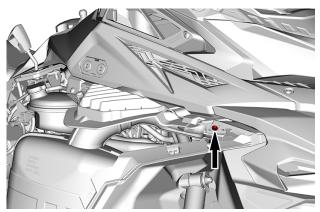


RH SIDE

3. Tighten to specification.


| Tightening Torque | | |
|-------------------------|-----------------------------------|--|
| Upper body module screw | 1.75 ± 0.25 Nm (15 ± 2 lbf-in) | |

4. Tighten the air intake hose clamp to specification.

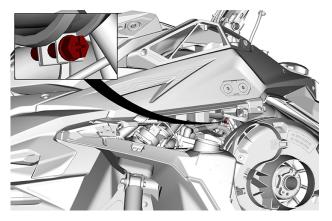


| Tightening Torque | | |
|-------------------|------------------------------|--|
| Hose clamp | 1 ± 0.2 Nm (9 ± 2 lbf-in) | |

5. Connect the MAPTS,, MGVIPM and headlight connectors.

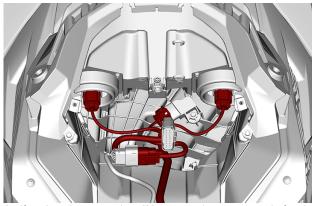

If equipped, connect the 12V power outlet connectors before installing the storage compartment.

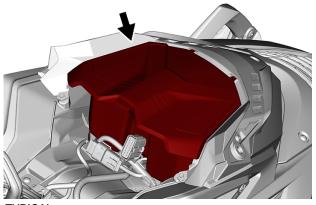

TYPICAL

BODY AND SEAT

Refer to procedures in this section and install:


- Side panels
- Windshield
- Gauge support.

Seat

500 mm (20 in.) Tunnel Width

Removing the Seat

Release the latch at the back of the seat.

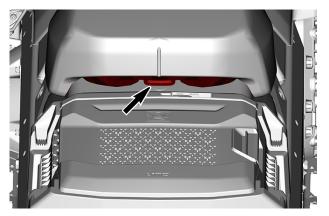

Slide seat rearwards to remove it.

Installing the Seat

NOTICE

Riding the vehicle with any objects between the seat and the fuel tank could damage the fuel tank. NEVER place any objects between seat and fuel tank.

Place seat over the hooks, then slide it forward.

Securely engage the latch.

⚠ WARNING

Make sure seat is securely latched before riding.

FUEL

Fuel Requirements

NOTICE

Always use fresh gasoline. Gasoline will oxidize; the result is loss of octane, volatile compounds, and the production of gum and varnish deposits which can damage the fuel system.

Alcohol fuel blending varies by country and region. Your vehicle has been designed to operate using the recommended fuels, however, be aware of the following:

- Use of fuel containing alcohol above the percentage specified by government regulations is not recommended and can result in the following problems in the fuel system components:
 - Starting and operating difficulties.
 - Deterioration of rubber or plastic parts.
 - Corrosion of metal parts.
 - Damage to internal engine parts.
- Inspect frequently for the presence of fuel leaks or other fuel system abnormalities if you suspect the presence of alcohol in gasoline exceeds the current government regulations.
- Alcohol blended fuels attract and hold moisture which may lead to fuel phase separation and can result in engine performance problems or engine damage.

Recommended Fuel

Use unleaded gasoline containing MAXIMUM 10% ethanol. The gasoline must have the following minimum octane requirements.

| fuel type | engine | min. octane rating |
|---|------------------------------------|--|
| Fuel with NO | 600 EFI | 87 Pump Posted AKI (RON+MON)/2) 92 RON |
| ethanol | 850 E-TEC 600R E-TEC | 91 AKI (RON+MON)/2 95 RON |
| Fuel which may contain up to 10% MAX ethanol | 600 EFI 850 E-TEC 600R E-TEC | 91 AKI (RON+MON)/2 95 RON |

NOTICE

Never experiment with other fuels. Engine or fuel system damages may occur with the use of an inadequate fuel.

NOTICE

Do NOT use fuel from fuel pumps labeled E85.

Use of fuel labeled E15 is prohibited by U.S. EPA Regulations.

Fueling Procedure

A WARNING

Always stop engine before refueling.

⚠ WARNING

Fuel is flammable and explosive under certain conditions.

Never use an open flame to check fuel level.

Never smoke or allow flame or spark in vicinity.

Always work in a well-ventilated area.

NOTE:

Do not sit or lean on seat when fuel tank cap is not properly installed.

- 1. Stop engine.
- 2. Have operator and passenger get off vehicle.


A WARNING

Do not allow anyone seated on the vehicle while fueling.

Unscrew slowly the fuel reservoir cap counterclockwise to stabilize pressure before removing it.

NOTE:

A short whistling sound is normal.

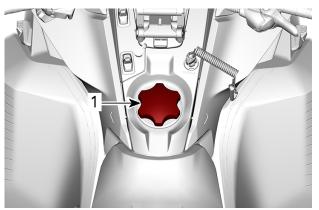

TYPICAL

1. Fuel tank cap

- 4. Insert the spout into the filler neck.
- Pour fuel slowly so that air can escape from the tank and prevent fuel flow back. Be careful not to spill fuel.
- Stop filling when the fuel reaches the bottom of filler neck. Do not overfill

A WARNING

Never top up the fuel tank before placing the vehicle in a warm area. As temperature increases, fuel expands and may overflow.

7. Fully tighten fuel reservoir cap clockwise.

A WARNING

Always wipe off any small fuel spillage from the vehicle. If a major spillage occurs, remove side panels to remove fuel vapors from engine compartment before starting.

NOTE:

Do not sit or lean on seat when fuel tank cap is not properly installed.

INJECTION OIL

Recommended Injection Oil

Rotax® engines were developed and validated using the XPS® oil. BRP recommends the use of its XPS injection oil or an equivalent at all time. Damages caused by the use of an injection oil not suitable for this 2-stroke direct fuel injection engine may not be covered by the BRP Limited Warranty.

RECOMMENDED Injection Oil

850 E-TEC

XPS 2T E-TEC Synthetic Oil (full synthetic)

IF THE RECOMMENDED XPS ENGINE OIL IS NOT AVAILABLE


Use a 2-stroke lubricant designed for snowmobiles meeting or exceeding the following lubricant industry specifications:

- JASO FD (M345-2004)
- SAE Gradè 4 (F / M 4)²

Injection Oil Level Verification

The injection oil reservoir is located behind the LH side panel. Refer to *Equipment* for opening procedure.

Always maintain a sufficient amount of recommended injection oil in the injection oil reservoir.

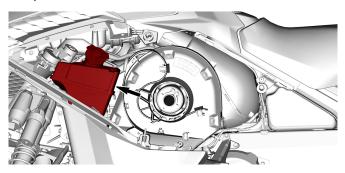


Marks on the tank indicates "1/4" and "1/2" of the total amount of oil.

NOTICE

Check level and refill every time you refuel.

Adding Injection Oil

- Remove injection oil reservoir cap.
 Add injection oil and ensure to not overfill.
- 3. Wipe the reservoir cap seal and flange area.

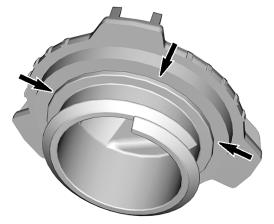

4. Reinstall cap.

NOTICE

Do not overtighten.

A WARNING

Wipe off any oil spills. Oil is highly flammable when heated.

BREAK-IN PERIOD

Operation During Break-In

Engine

During the break-in period:

- Avoid prolonged full throttle operation.
- Avoid sustained accelerations.
- Avoid prolonged cruising speeds.
- Avoid engine overheating.

However, brief accelerations and speed variations contribute to a good break-in.

During a predetermined period, the engine management system controls some engine parameters.

The duration is based on fuel volume. It will take approximately two fuel tanks to complete the break-in.

During this period:

- The engine performance and behavior will not be optimal.
- The fuel and oil consumption will be higher.

Drive Belt

A new drive belt requires a break in period of 50 km (30 mi).

During the break-in period:

- Avoid strong acceleration and deceleration.
- Avoid pulling a load.
- Avoid high speed cruising.

If the vehicle creeps, lower the drive belt height from the preliminary setting. Refer to *Drive Belt* in *maintenance procedure*.

BASIC PROCEDURES

Engine Starting Procedure

Procedure

- Apply parking brake.
- Recheck throttle control lever operation.
- 3. Put your helmet on.
- Ensure that the tether cord cap is installed on the engine cut-off switch and that the cord is attached to your clohing eyelet.
- Ensure that the emergency engine stop switch is in the ON position (up).

/ WARNING

Never depress throttle while starting engine.

6. Release parking brake.

NOTE:

For an initial cold start, do not release parking brake. Perform the *vehicle warm-up* procedure as explained below.

Manual Start Models

Grab rewind starter handle, pull handle slowly until a resistance is felt, then hold handle firmly and pull vigorously to start engine.

NOTE:

The maximum torque that can be transmitted to the engine by the rewind starter is 80 Nm (59 lbf-ft). The maximum force that can be exerted on the on the rope is 2 200 N (494.6 lbf).

Electric Start Models

Press the START/RER button to engage the electric starter and start the engine. Release button immediately when engine has started.

NOTICE

Do not engage electric starter for more than 10 seconds at a time. A rest period should be observed between the cranking cycles to allow electric starter to cool down.

Emergency Starting

The engine can be started with the emergency starter rope supplied in the storage compartment. Refer to *Body and Seat*.

Remove the drive belt guard. Refer to Body and Seat.

⚠ WARNING

Do not wind starting rope around your hand. Hold rope by the handle only. Do not start the engine by the drive pulley unless it is a true emergency situation. Have the snowmobile repaired as soon as possible.




Attach one end of emergency rope to the rewind handle.

NOTE:

The suspension adjustment tool can be used as an emergency handle.

Cross the rope on the first turn as shown.

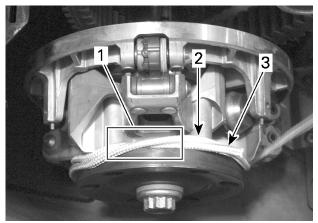

- Rope crossed
 Rope to be winded
- 3. Rope end

Wind rope two turns counterclockwise tightly around the drive pulley where shown.

Pull the rope using a sharp, crisp pull so the rope comes free of the drive pulley.



Start engine as per usual manual starting.

⚠ WARNING

When starting the snowmobile in an emergency situation, using drive pulley, do not reinstall the belt guard and return slowly to have snowmobile repaired.

Vehicle Warm-Up

Before every ride, vehicle has to be warmed up as follows.

- 1. Start engine as explained in Engine Starting Procedure above.
- 2. Allow engine to warm up one or two minutes at idle speed.

NOTE:

Engine will shut down after approximately 12 minutes of idling.

- 3. Disengage parking brake.
- Apply throttle until drive pulley engages. Drive at low speed the first two or three minutes.

NOTICE

If vehicle does not move when throttle is applied, stop engine, remove tether cord cap from the engine cut-off switch, then do the following.

- Check if skis are stuck on the ground. Lift one ski at a time by the handle, then put it down.
- Check if track is stuck on the ground. Lift rear of snowmobile enough to clear track from the ground, then drop.
- Check rear suspension for hard snow or ice accumulation that could interfere with track rotation. Clean the area.

A CAUTION

Beware of injuries by using proper lifting techniques, notably using your legs force. Do not attempt to lift the rear of vehicle if it is above your limits.

⚠ WARNING

Make sure tether cord cap is removed before standing in front the vehicle, getting close to the track or rear suspension components.

NOTF:

Warm-up is electronically controlled. During this period (up to 10 minutes depending on ambient temperature), engine RPM is limited.

Reverse (RER)

When the engine is running, depressing the RER button will slow down engine RPM to almost a stop and advance the ignition timing to invert crankshaft rotation.

- Engine will automatically shift into forward when restarting after stopping or stalling.
- Shifting procedure will take place only when the engine is running.
- If engine is running at a speed above 3000 RPM, the function of the RER button is disabled.
- It is recommended to warm up the engine to its normal operating temperature before shifting.

Shifting in Reverse - 4.5" or 7.2" Digital Display

- Bring vehicle to a complete stop.
- Apply and hold brake. Remain seated, refer to Rider Position (Reverse Operation) in Riding the vehicle for posture information.

BASIC PROCEDURES

- With engine at idle speed, select reverse (R) gear using the Start / RER button.
- 4. Wait until reverse beeper sounds, then gently depress throttle lever.

⚠ WARNING

The reverse speed is not limited. Always proceed with caution as fast reverse could result in loss of vehicle stability. Come to complete stop before activating the reverse. Always remain seated and apply the brake before shifting. Ensure the path behind is clear of obstacles or bystanders before proceeding.

Shifting in Forward from Reverse

- Bring vehicle to a complete stop.
- 2. Apply and hold brake.
- 3. Press and release the RER button.
- Apply throttle slowly and evenly. Allow drive pulley to engage then accelerate carefully.

Shutting Off the Engine

Release throttle lever and wait until engine has returned to idle speed.

Shut off the engine using either the emergency engine stop switch or by pulling off the tether cord cap from the engine cut-off switch.

⚠ WARNING

Always remove the tether cord cap from engine cut-off switch when vehicle is not in operation in order to prevent accidental engine starting or to avoid unauthorized use by children or others or theft.

After engine shutdown:

The fan may remain active between 1 and 4 minutes after the shutdown depending on the exhaust temperature.

RIDING CONDITIONS AND YOUR SNOWMOBILE

Altitude

At factory, your snowmobile was calibrated to be used within an altitude range (relative to sea level).

A new snowmobile has a tag attached to the handlebar indicating its calibration. Refer to Safety Information on Vehicle.

If for any reason you don't know your snowmobile calibration, contact an authorized BRP snowmobile dealer.

If your snowmobile is to be used at an altitude outside the specified range, have it calibrated accordingly by an authorized BRP snowmobile dealer.

NOTICE

An inappropriate altitude calibration would decrease performance and may cause serious damage to the snowmobile.

Temperature

The engine management of these engines provides the optimum air/fuel ratio for all temperatures.

Hard Packed Snow

All models covered in this guide which are equipped with a minimum track profile of 44 mm (1.75 in) are built for deep snow conditions and should never be used during a prolonged period of time in marginal or hard packed snow conditions.

In the event you have to ride in these types of conditions:

- Avoid exceeding a speed of 70 km/h (45 mph) in all conditions
- Avoid hard acceleration (over 75% of throttle)
- Ice scratchers should be applied
- Engine temperature should not exceed 75% on the temperature gauge.

NOTICE

Running these types of tracks at high speed on a trail, on hard packed surfaces or on ice puts more stress on the lugs, which tends to heat up as a result. It also could drastically reduce the life of specific wear parts. To avoid potential degradation, delamination or damages to the track and wear parts, reduce your speed and minimize the distance that is being ridden on these types of surfaces.

Vehicles Equipped with Ice Scratchers

Ice scratchers are equipped on the vehicle to increase engine cooling efficiency, to lubricate and to cool track clips and sliders. They must be used whenever on ice, hard packed snow, or any conditions that do not lift enough snow particles into the rear suspension and the tunnel.

NOTICE

Although it is not recommended to ride a snowmobile equipped with a high lug profile track on trails or hard packed snow conditions, it is highly suggested to combine idler wheels and ice scratchers on a vehicle used in these conditions.

IMPORTANT

Ridding in these trail conditions puts the reliability of the track and its warranty at risk

If equipped with the following track profile heights, never exceed the recommended sustained vehicle speeds listed.

| Track Profile Height | Maximum Sustained Speed |
|------------------------------------|-------------------------|
| 57 mm (2.25 in) 60 mm (2.36 in) | 110 km/h (70 MPH) |
| 64 mm (2.52 in) 75 mm (3 in) | 95 km/h (60 MPH) |

TUNE YOUR RIDE


Front Suspension Adjustments

Ski Stance

Skis can be set to three different widths

To obtain the different widths, place the spacers:

- Inside the skis leg (narrowest ski stance setting: easiest to initiate turn on sidehills), or
- Outside the skis leg (widest ski stance setting: most stable on corners), or
- On each side (central setting: best steering accuracy on deep snow).

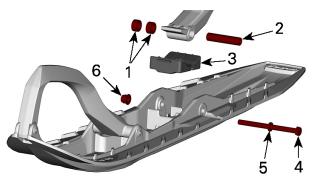

- Spacers
- 2. 3. 4. Axle
- Stopper
- Screw
- Washer
- Nut

| TIGHTENING TORQUE | | |
|-------------------|------------------------------|--|
| Ski nut | 48 ± 6 Nm (35 ± 4 lbf-ft) | |

Front Springs

Front spring preload has an effect on front suspension firmness.

Front spring preload also has an effect on the steering behavior.


| Action | Result |
|--------------------|---------------------------------|
| Increasing preload | Firmer front suspension |
| | Higher front end |
| | More precise steering |
| | More bump absorption capability |
| Decreasing preload | Softer front suspension |
| | Lower front end |
| | Lighter steering |
| | Less bump absorption capability |

⚠ WARNING

Adjust both springs to the same preload. Uneven adjustment can cause poor handling and loss of stability, and/or control, and increase the risk of an accident.

Cam Type Adjuster


Using the suspension adjustment tool provided in the tool kit, turn the cam to increase or decrease the spring preload.



- 1. Increase preload
- 2. Decrease preload

Ring Adjuster - Type 1


Grab and turn the ring and the spring to increase or decrease the spring preload.

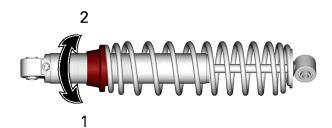

- 1. Increase preload
- 2. Decrease preload

Ring Adjuster - Type 2

Grab and turn the ring and the spring to increase or decrease the spring preload.

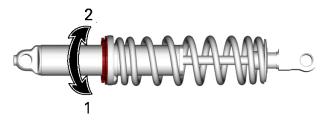

- 1. Increase preload
- 2. Decrease preload

Front Shock Absorber Adjustments (KYB PRO R Series Only)

Compression Damping 3 Position Knob Type

NOTE:


Both low and high speed compression damping are adjusted simultaneously.

Low speed compression damping controls how the shock absorber reacts to a low suspension velocity (slow compression strokes, in most cases when riding at lower speeds).

TUNE YOUR RIDE

High speed compression damping controls how the shock absorber reacts to a high suspension velocity (quick compression strokes, in most cases when riding at higher speeds).

To adjust, turn the adjuster button located on the reservoir.

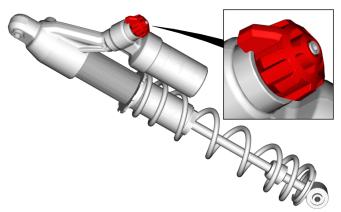


3 POSITIONS COMPRESSION DAMPING ADJUSTER BUTTON

| Turning | Action | Result on big and small bumps | |
|----------------------|--|-------------------------------|--|
| Clockwise | Increasing compression damping force | Firmer compression damping | |
| Counter Clockwise | Decreasing compression damping force | Softer compression damping | |

Rebound Damping

Rebound damping controls how the shock absorber restrains the extension stroke.

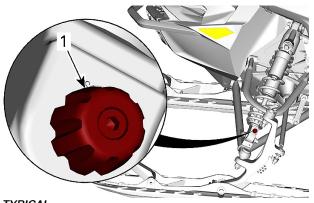

TYPICAL


1. Rebound adjuster

| Turning | Action | Result on big and small bumps |
|----------------------|----------------------------------|---|
| Clockwise | Increasing rebound damping force | Firmer rebound damping (slower extension speed) |
| Counter Clockwise | Decreasing rebound damping force | Softer rebound damping (faster extension speed) |

NOTE:


In repetitive short small bumps (ripple), it is recommended to use a lower rebound damping setting.

Rear Suspension Adjustments

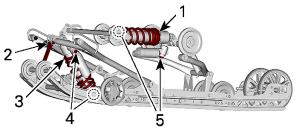


PPS2 - ADJUSTABLE COMPONENTS

- 1. Rear spring
- 2. Stopper strap
- 3. Center spring
- 4. Center shock absorber
- 5. Rear shock absorber

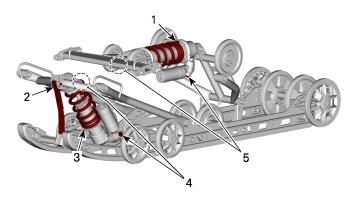

PPS3 - ADUSTABLE COMPONENTS

- 1. Rear spring
- Stopper strap
 Center spring
- 4. Center shock absorber
- Rear shock absorber

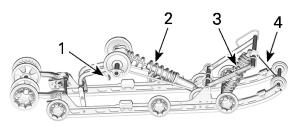

FASYRIDE - ADJUSTABLE COMPONENTS

- 1. Easy Adjust Handle (if equipped)
- 2. Rear spring
- Center spring
- 4. Stopper strap

NOTICE

Whenever adjusting rear suspension, check track tension and adjust if necessary.

Stopper Strap - EasyRide Suspension

Stopper strap length has an effect on the amount of weight the center spring has to carry especially during acceleration, therefore on the front end uplift.


Stopper strap length also has an effect on center spring travel.

NOTICE

Whenever stopper strap length is changed, track tension must be checked.

NOTE:

Stopper strap can be set to position 1, 2 or 3. Smaller numbers correspond to a longer strap setting.

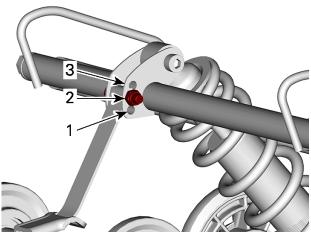

STOPPER STRAP POSITIONS

- 1. Position 1 (longest)
- 2. Position 2
- 3. Position 3 (shortest)

When operating the snowmobile in deep snow or hill climbing, it may be necessary to vary stopper strap length and/or riding position, to change the angle at which the track rides on the snow. Operator's familiarity with the various adjustments as well as snow conditions will dictate the most efficient combination.

Generally, a longer stopper strap setting gives better performance on a flat landscape and a shorter setting will improve handling in steep hill climbing and deep snow conditions.

| Stopper Strap Setting | | |
|-----------------------|--|--|
| Position | Use | |
| 1 | Boon docking: - Better bump absorption - Lighter and easier handling on flat landscape. | |
| 2 | Standard setting: Best overall setting (general use) | |
| 3 | Hill climb: - Better track attack angle for hill climbing - Less transfer - Lower ride height | |

Center Spring

Center spring preload has an effect on steering effort, handling and bump absorption.


Also, since center spring preload adjustment puts more or less pressure on the front of the track, it has an effect on the performance in deep snow.

| Action | Result | |
|--------------------|---|--|
| Increasing preload | Lighter steering | |
| | More bump absorption capability | |
| | Better deep snow starts | |
| | Better deep snow performance and handling | |
| Decreasing preload | Heavier steering | |
| | Less bump absorption capability | |
| | Better trail handling | |

Cam Type Adjuster

TUNE YOUR RIDE


Using the suspension adjustment tool provided in the tool kit, turn the cam to increase or decrease the spring preload.



- 1. Increase preload
- 2. Decrease preload

Ring Type Adjuster

Grab and turn the ring and the spring to increase or decrease the spring preload.

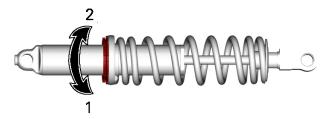

- 1. Increase preload
- 2. Decrease preload

Easy Ride+ FIXED

Rear spring preload has an effect on comfort, ride height and load compensation.

Also, adjusting rear spring preload shifts more or less weight to the snowmobile front end. As a result, more or less weight is applied to the skis. This has an effect on performance in deep snow, steering effort and handling.


Slight suspension bottoming occurring under the worst riding conditions indicates a good choice of spring preload.

| Action | Result |
|--------------------|---|
| | Firmer rear suspension |
| Increasing preload | Higher rear end |
| | More bump absorption capability |
| | Heavier steering |
| Decreasing preload | Softer rear suspension |
| | Lower rear end |
| | Less bump absorption capability |
| | Lighter steering |
| | Better deep snow performance and handling |

Refer to the following to determine if preload is correct.


- A = Suspension fully extended (For fully extended the suspension, lifted the rear bumper before taking the measurement.)
- B = Suspension has collapsed with operator, passenger(s) and load added
- C = Distance between dimension "A" and "B", see table below

Easy Ride+ FT (If Equipped)

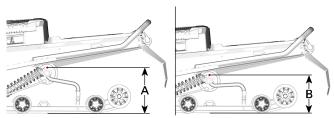


TYPICAL - DISTANCE BETWEEN GROUND AND UPPER REAR ARM PIVOT

Easy Ride+ FS (If Equipped)

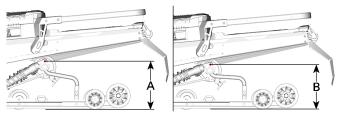

TYPICAL - DISTANCE BETWEEN GROUND AND UPPER REAR ARM PIVOT

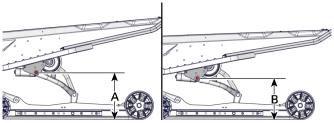

TYPICAL - DISTANCE BETWEEN GROUND AND UPPER REAR ARM PIVOT

| С | What to do |
|-----------------------------|-------------------------------------|
| 90 to 100 mm (3.6 to 4 in) | No adjustment required |
| More than 100 mm (4 in) | Adjusted too soft. Increase preload |
| Less than 90 mm (3.6 in) | Adjusted too firm. Decrease preload |

NOTE:

If the specification is unattainable with the original springs, visit an authorized BRP snowmobile dealer for other available springs.

To adjust, unscrew the locking ring, then turn the adjustment ring to set the spring preload.

When the desired preload is set, tighten the locking ring against the adjustment ring.

Adjustment Tips According to Vehicle Behavior

| Problem | Corrective measures | |
|--|---|--|
| Front suspension darting | Check ski alignment. Reduce front suspension spring preload. Increase center spring preload. Reduce rear spring preload. | |
| Steering feels too heavy at steady speeds | Reduce front suspension spring preload.Increase center spring preload. | |
| Steering feels too heavy during acceleration | Reduce rear spring preload.Lengthen limiter strap. | |
| Too much ski lift during cornering or acceleration | Shorten limiter strap. Increase rear spring preload. | |
| Rear of snowmobile seems too stiff | Reduce rear spring preload. Reduce compression damping adjustment if equipped | |
| Rear of snowmobile seems too soft | Increase rear spring preload. | |
| Rear suspension is frequently bottoming | Increase compression damping adjustment if equipped. Increase rear spring preload. Increase center spring preload. Lengthen limiter strap. | |
| Snowmobile seems to pivot around its center | Reduce center spring preload. Increase rear spring preload. Increase front suspension spring preload. Shorten limiter strap. | |
| Track spins too much at start | Reduce rear spring preload. Increase center spring preload. Lengthen limiter strap. | |

This page is intentionally blank

MAINTENANCE

MAINTENANCE SCHEDULE

EPA Regulation - Canadian and USA Vehicles

A repair shop or person of the owner's choosing may maintain, replace, or repair emission control devices and systems. These instructions do not require components or service by BRP or authorized BRP snowmobile dealers.

Although an authorized BRP snowmobile dealer has an in-depth technical knowledge and tools to service your vehicle, the emission-related warranty is not conditioned on the use of an authorized BRP snowmobile dealer or any other establishment with which BRP has a commercial relationship.

Proper maintenance is the owner's responsibility. A warranty claim may be denied if, among other things, the owner or operator caused the problem through improper maintenance or use.

For emission-related warranty claims, BRP is limiting the diagnosis and repair of emission-related parts to the authorized BRP snowmobile dealers. For more information, please refer to the US EPA Emissions PERFORMANCE WARRANTY contained in the warranty section

You must follow the instructions for fuel requirements in the fueling section of this manual. Even if gasoline containing greater than ten volume percent ethanol is readily available, the US EPA issued a prohibition against the use of gasoline containing greater than 10 vol% ethanol that applies to this vehicle. The use of gasoline containing greater than 10 vol% ethanol with this engine may harm the emission control system.

Deep Snow/ Trail/ Crossover/ Utility Usage

Whether your vehicle is a Deep Snow, Trail, Crossover, or Utility model, these types of usage require maintenance tasks to be performed between the regular yearly intervals. These are identified as A+ in the chart below.

If you regularly ride **deep snow and perform frequent hill climbs**, follow the A+ Deep Snow interval and perform the tasks outlined in the chart below.

If you regularly ride in **trails, explore the countryside, or work** with your snowmobile, follow the A+ Trail / Crossover / Utility interval and perform the tasks outlined in the chart below.

Maintenance Schedule

Make sure to perform proper maintenance at recommended intervals as indicated in the tables.

The maintenance chart indicates the items needing to be addressed based on 2 criteria, whichever happens first:

- Calendar time
- Odometer reading.

Your driving habits determines the factors you shall adhere too. For example:

- Someone who uses their vehicle every weekend trail riding would most likely follow the **odometer reading** to determine the frequency of his maintenance.
- Someone who uses their vehicle seldomly over the year or only on a few occasions would follow the calendar time to determine the frequency of his maintenance.

IMPORTANT: The following tables show the appropriate maintenance application for the first 2 years. For subsequent years, repeat the same pattern alternatively.

| Maintenance Overview | | | |
|----------------------|--|---------|--|
| Calendar Time | Odometer Trail/ Cross Over/ Utility | | |
| Every Month | 1500 km (1000 mi) A+ | | |
| 1 Year | 3000 km (2000 mi) |) A | |
| Every Month | 4500 km (3000 mi) | A+ | |
| 2 Years | 6000 km (4000 mi) | A and B | |

E-TEC Engine (except turbo)

| TRAIL / CROSSOVER /UTILITY | A+ | Α | В |
|---|--|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Air and Fuel Delivery | | | |
| Fuel components (fuel cap, hoses, clamps and tank fixation) and function | | ı | |
| In-line fuel filter | | R Every 5 years | |
| Body and Chassis | | | |
| Body panels and hardware | | I, T | |
| Pivots, latches, hinges and key barrels | | L | |
| Engine and Cooling | | | |
| Engine cooling components (coolant concentration, coolant level, hose condition, clamps, leaks) | | I, A | |
| Engine rubber mounts | | | ı |
| Rewind starter (manual start models) | | | C, L |
| Spark plugs | | | R |

| TRAIL / CROSSOVER /UTILITY | A+ | Α | В |
|--|--|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| | | | Every 3 years or 10 000 km (6000 mi) |
| Oil injection pump strainer | | I, C Every 3 years or 10 000 km (6000 mi) | |
| RAVE valves | | I, C Every 3 years or 10 000 km (6000 mi) | |
| Engine coolant | | R Every 5 years | |
| Exhaust and Emissions | | | |
| Exhaust components (gaskets, pipes, muffler condition, leaks) | | 1 | |

| TRAIL / CROSSOVER /UTILITY | A + | Α | В |
|--|--|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Exhaust manifold | | T | |
| Brake | | | |
| Brake components and function | | I, L | |
| Brake fluid | | | R Every 2 years |
| Drive | | | |
| Chaincase drive chain tension | Α | Α | |
| Gearbox / chaincase oil level | I | 1 | |
| Track alignment and tension | Α | I, A | |
| Gearbox / chaincase oil | | | R |
| Continuously Variable Tra | nsmission (| CVT) | |
| CVT components and function | | I, C, L | |
| CVT drive belt condition | ı | | |
| CVT drive belt tension | Α | Α | |
| Drive pulley retaining screw | | T | |
| Electrical | | | |

| TRAIL / CROSSOVER /UTILITY | A+ | Α | В |
|--|--|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Battery connections and condition | | I | |
| Electrical harness routing | | 1 | |
| Headlight aim | | Α | |
| Modules and applicable software updates | | ı | |
| Operation of control switches and lighting | | ı | |
| Steering and Controls | | | |
| Ski runners | ı | ı | |
| Gearbox position lever operation | | I, A | |
| Steering alignment | | I, A | |
| Steering components and function | | I | |
| Throttle cable | | Α | |
| Throttle operation | | ı | |
| Suspension | | | |
| Suspension components and function | | I, L | |
| Rear suspension limiter strap | | | R |



MAINTENANCE SCHEDULE

| DEEP SNOW | A+ | Α | В |
|---|---|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Air and Fuel Delivery | | | |
| Fuel components (fuel cap, hoses, clamps and tank fixation) and function | | I | |
| In-line fuel filter | | R Every 5 years | |
| Body and Chassis | | | |
| Body panels and hardware | | I, T | |
| Pivots, latches, hinges and key barrels | | L | |
| Engine and Cooling | | | |
| Engine cooling components (coolant concentration, coolant level, hose condition, clamps, leaks) | | I, A | |
| Engine rubber mounts | | | ı |
| Rewind starter (manual start models) | | | C, L |
| Spark plugs | | R Every 3 years or 10 000 km | |

| DEEP SNOW | A+ | Α | В |
|--|---|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| | | (6000 mi) | |
| Oil injection pump strainer | | I, C Every 3 years or 10 000 km (6000 mi) | |
| RAVE valves | | I, C Every 3 years or 10 000 km (6000 mi) | |
| Engine coolant | | R Every 5 years | |
| Exhaust and Emissions | | | |
| Exhaust components (gaskets, pipes, muffler condition, leaks) | | ı | |
| Exhaust manifold | | T | |
| Brake | | | |
| Brake components and function | | I, L | |

| DEEP SNOW | A+ | Α | В |
|--|--|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Brake fluid | | | R Every 2 years |
| Drive | | | |
| Chaincase drive chain tension | A After the first 75 km (50 mi) then every 500 km (300 mi), up to then every 1500 km (1000 mi) | Α | |
| Gearbox / chaincase oil level | | 1 | |
| Track alignment and tension | A After the first 75 km (50 mi) then every 500 km (300 mi), up to then every | I, A | |

| DEEP SNOW | A+ | Α | В |
|--|---|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| | 1500 km (1000 mi) | | |
| Gearbox / chaincase oil | | | R |
| Continuously Variable Tra | nsmission (| CVT) | |
| CVT components and function | | I, C, L | |
| CVT drive belt condition | I | | |
| CVT drive belt tension | Α | Α | |
| Drive pulley retaining screw | | T | |
| Electrical | | | |
| Battery connections and condition | | I | |
| Electrical harness routing | | ı | |
| Headlight aim | | Α | |
| Modules and applicable software updates | | 1 | |
| Operation of control switches and lighting | | I | |
| Steering and Controls | | | |
| Ski runners | | ı | |
| Gearbox position lever operation | | I, A | |

| DEEP SNOW | A+ | Α | В |
|--|---|--|--|
| A = Adjust C = Clean I = Inspect L = Lubricate R = Replace T = Torque | Every month or 1500 km (1000 mi) | Every year or 3000 km (2000 mi) | Every 2 years or 6000 km (4000 mi) |
| Steering alignment | | I, A | |
| Steering components and function | | 1 | |
| Throttle cable | | Α | |
| Throttle operation | | ı | |
| Suspension | | | |
| Suspension components and function | | I, L | |
| Rear suspension limiter strap | | | R |

MAINTENANCE PROCEDURES

This section includes instructions for basic maintenance procedures.

WARNING

Turn off the engine, remove tether cord cap and follow these maintenance procedures when performing maintenance. If you do not follow proper maintenance procedures you can be injured by hot parts, moving parts, electricity, chemicals or other hazards.

A WARNING

Should removal of a locking device be required (e.g. lock tabs, self-locking fasteners, etc.) when undergoing disassembly/assembly, always replace with a new one.

Engine Coolant

! WARNING

Never open coolant tank cap when engine is hot.

Engine Coolant Level Verification


Open the RH side panel. See Body and Seat.

Check the coolant level at room temperature. Liquid should be at the COLD level line of the coolant tank.

NOTE:

When checking level at low temperature it may be slightly lower than the mark.

If additional coolant is necessary or if the entire system has to be refilled, refer to an authorized BRP snowmobile dealer, repair shop or person of your own choosing.

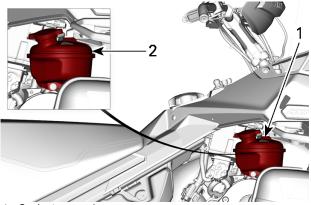

- Coolant reservoir
- 2. COLD line

Recommended Engine Coolant

RECOMMENDED COOLANT

XPS Extended life pre-mixed coolant

IF THE RECOMMENDED XPS COOLANT IS NOT AVAILABLE

Distilled water and antifreeze solution (50% distilled water, 50% antifreeze)

NOTICE

Always use ethylene-glycol antifreeze containing corrosion inhibitors specifically for internal combustion aluminum engines.

Exhaust System

Exhaust System Verification

The muffler tail pipe should be centered with the exit hole in the bottom pan. Exhaust system must be free of rust or leaks. Make sure that all parts are securely in place.

Check retaining springs and heat shields condition and replace if necessary.

The exhaust system is designed to reduce noise and to improve the total performance of the engine. Modification may be in violation of local laws

NOTICE

If any exhaust system component is removed, modified or damaged, severe engine damage may result.

Spark Plugs

Spark plugs inspection or replacement may be performed by an authorized BRP snowmobile dealer, repair shop, or person of your own choosing. Spark plugs inspection or replacement requires an in-depth technical knowledge. Though not required, it is recommended that an authorized BRP snowmobile dealer performs spark plugs inspection or replacement.

Brake Fluid

Recommended Brake Fluid

| Recommended Brake Fluid |
|---------------------------------|
| XPS DOT 4 Brake Fluid |
| Alternative or if not available |
| DOT 4 Brake Fluid |

Use only DOT 4 brake fluid from a sealed container. An opened container may be contaminated or may have absorbed moisture from the air.

A WARNING


Use only DOT 4 brake fluid from a sealed container. To avoid serious damage to the braking system, do not use fluids other than the recommended one, nor mix different fluids for topping up.

Verifying the Brake Fluid Level - Model with Aluminum Reservoir

NOTICE


Vehicle must be on a level surface before checking any fluid levels.

- Position the handlebar in the straight-ahead position to ensure the reservoir is level.
- 2. Check brake fluid in the reservoir for proper level.

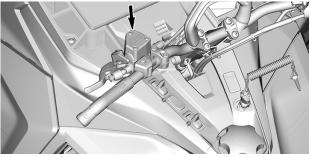

TYPICAL

Brake fluid must always be above the MIN. line when brake lever is squeezed.

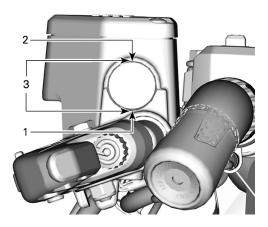

TYPICAL


- 1. Minimum
- 2. Maximum
- 3. Operating range

Adding Brake Fluid


NOTICE

Vehicle must be on a level surface before checking any fluid levels.


1. Clean the reservoir cap area.

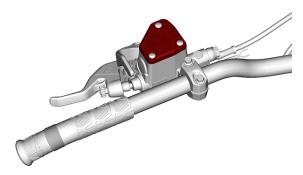

2. Remove the screws retaining the reservoir cap.

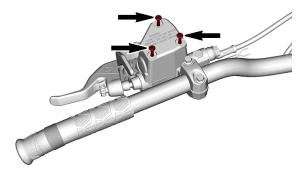

3. Remove the reservoir cap.

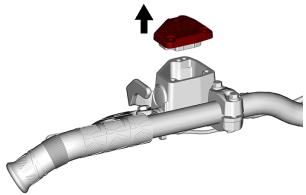


 Add fluid as required. Do not overfill. Use only the recommended brake fluid

A CAUTION

Avoid getting brake fluid on skin or eyes - it may cause severe burns. In case of contact with the skin, wash thoroughly. In case of contact with the eyes, immediately rinse with plenty of water for at least 10 minutes and then consult a doctor immediately.

NOTICE

- Brake fluid can damage paint, rubber and plastic parts
- Protect these nearby parts with a rag when servicing the brake system
- Rinse thoroughly in case of spillage.
- 5. Ensure the diaphragm is pushed in the reservoir cap before installing the cap one the reservoir.



6. Reinstall reservoir cap and screws. Tighten to specification.

| Tightenin | ng Torque |
|----------------------|--------------------------------|
| Reservoir cap screws | 0.7 ± 0.1 Nm (6 ± 1 lbf-in) |

Chaincase Oil

Recommended Chaincase Oil


| Recommended Chaincase Oil |
|---|
| XPS Synthetic chaincase oil |
| Alternative or if not available |
| 75W140 gear oil that meets the API GL-5 specification |

NOTICE

If the recommended XPS chaincase oil is not available, use a 75W140 gear oil that meets the API GL-5 specification. The chaincase of this snowmobile has been developed and validated using the XPS™ Synthetic chaincase oil. BRP strongly recommends the use of its XPS Synthetic chaincase oil at all times. Damages caused by oil which is not suitable for the chaincase will not be covered by the BRP limited warranty.

Verifying the Chaincase Oil Level

With the vehicle on a level surface, check the oil level by removing the check plug.

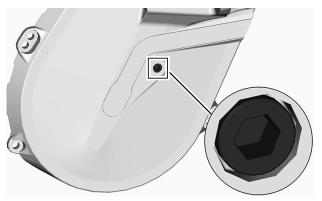

CHECK PLUG

Oil level must reach the threaded hole.

If level is correct, reinstall check plug and tighten to the specified torque.


| Tightenir | ng Torque |
|------------|--------------------------|
| Check plug | 6 ± 1 Nm (53 ± 9 lbf-in) |

If level is insufficient, refer to Chaincase Filling Procedure.

Replacing the Chaincase Oil

Draining the Chaincase Oil

- Place the vehicle on a level surface.
- 2. Place a drain pan under the chaincase drain plug area.
- 3. Remove filler cap.
- 4. Remove the drain plug located at the bottom of the chaincase.

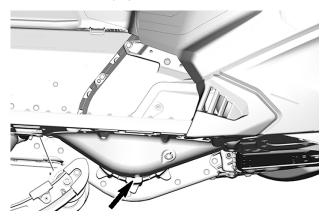

- 5. Wait a while to allow all oil to drain out of the chaincase.
- 6. Install drain plug and tighten to specification.

| Tightenir | ng Torque |
|----------------------|--------------------------|
| Chaincase drain plug | 6 ± 1 Nm (53 ± 9 lbf-in) |


Filling the Chaincase

- Open the RH side panel. Refer to *Equipment*.
 Remove the check plug.



CHECK PLUG

3. Remove the filler cap.

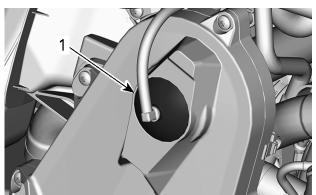

TYPICAL - TOP OF CHAINCASE

- 1. Filler cap
- 4. Pour recommended oil in the filler hole until oil comes out by the check plug hole.

 5. Reinstall check plug and tighten to specification.

| Tighte | ening Torque |
|------------|--------------------------|
| Check plug | 6 ± 1 Nm (53 ± 9 lbf-in) |

Reinstall the filler cap.

Drive Chain


Access to Chaincase

Open RH side panel, refer to Equipment.

Drive Chain Adjustment

Using the Torx end of the driven pulley expander, GENTLY turn tensioner clockwise to eliminate the play.

NOTE: Make sure the play is completely eliminated by trying to turn back and forth the driven pulley.

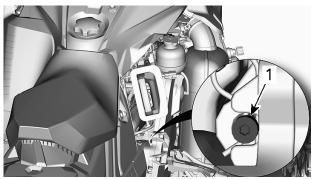

TYPICAL

Do not force the tensioner in.

NOTE:

Do not remove the hair cotter pin.

NOTICE

Overtightening the drive chain could result in severe damage to the chaincase components.

Drive Belt

Drive Belt Inspection


Remove the drive belt guard. Refer to the procedure in Equipment.

Inspect belt for cracks, fraying or abnormal wear (uneven wear, wear on one side, missing cogs, cracked fabric). If abnormal wear is noted, probable cause could be pulley misalignment, excessive RPM with frozen track, fast starts without warm-up period, burred or rusty sheave, oil on belt or distorted spare belt. Contact an authorized BRP snowmobile dealer.

Replacing the Drive Belt

Removing the Drive Belt

- Remove the tether cord cap from engine cut-off switch.
- 2. Remove the LH side panel.
- Remove the drive belt guard. Refer to Removing the Drive Belt Guard.
- 4. Insert the driven pulley expander provided, in the threaded hole on the adjuster hub as shown.

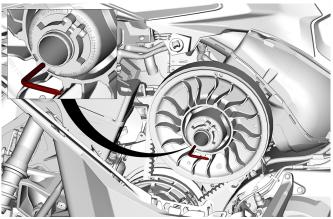

TYPICAL - PULLEY EXPANDER INSTALLED ON ADJUSTER HUB

- 5. Open the driven pulley by screwing the tool in.
- Remove the drive belt by slipping it over the edge of the driven pulley, then over the drive pulley.

Installing the Drive Belt

The driven pulley must be expanded. Refer to Removing the Drive Belt.


Slip the belt over the drive pulley, then over the driven pulley.

NOTICE

Do not force or use tools to pry the belt into place, as this could cut or break the cords in the belt.

NOTE:

The maximum drive belt life span is obtained when belt is installed with arrows in the direction of rotation.

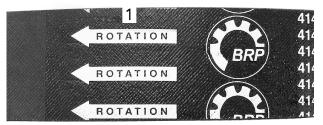

- 1. To be pointed in the direction of rotation
- 2. Unscrew and remove the driven pulley expander from the pulley.
- Rotate the driven pulley several times to properly set the belt between the sheaves
- If a new belt was installed, an adjustment will be required for the proper belt height. Refer to Adjusting the Drive Belt Height.
- Install belt guard.
- 6. Close side panel.

Adjusting the Drive Belt Height


Remove the tether cord cap from engine cut-off switch.

Remove the LH side panel.


Remove the drive belt guard.

The drive belt height must be checked every time a new drive belt is installed and as part of the pre-ride inspection.

1. Loosen the clamping bolt.

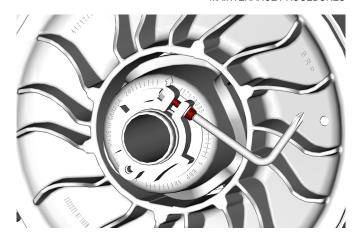

2. Using the suspension adjustment tool provided, turn the ring 1/4 turn at a time then rotate the driven pulley to properly set the drive belt between the pulley sheaves.

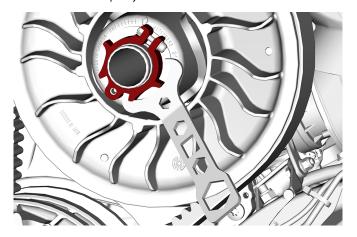

NOTF:

The adjustment ring has left hand treads.

600 EFI

Repeat step 4 until the drive belt outer surface is even with the driven pulley edge.




600 EFI - PRELIMINARY SETTING

1. Drive belt outer surface is even with the driven pulley edge

600R E-TEC

Repeat step 4 until the lowest portion of the cogs on the external surface of drive belt is even with the driven pulley edge.

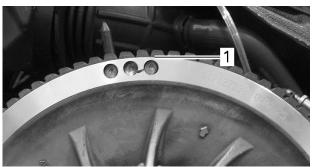


TYPICAL - PRELIMINARY SETTING

1. Lowest portion of cogs even with driven pulley external edge

850 F-TFC

Repeat step 4 until the cord of drive belt is just hidden by the driven pulley edge.

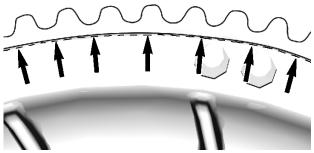


PRELIMINARY SETTING

NOTE:

Turning the ring counterclockwise lowers the drive belt in the pulley. Turning the ring clockwise raises the drive belt in the pulley.

3. Firmly tighten the clamping bolt. If possible, tighten to specification using a torque wrench.

| TIGHTEN | IING TORQUE |
|---------------|------------------------------|
| Clamping bolt | 5.5 ± 0.5 Nm (49 ± 4 lbf-in) |

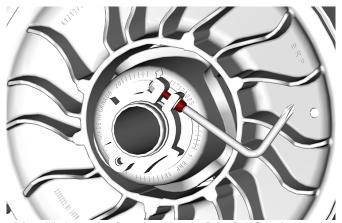

- 4. Install belt guard, refer to Installing the Drive Belt Guard.
- Install LH side panel.
- 6. Start engine and check if vehicle creeps.
- 7. If vehicle does not creep, adjustment is complete.
- 8. If vehicle creeps, check the drive belt deflection.

Reverse Activation (if equipped)

Reverse may not activate or may be harder to activate if the belt is positioned too high in the driven pulley. If reverse activation does not work properly, ensure the drive belt is properly adjusted.

Adjust the drive belt lower in the driven pulley if needed.

Drive Pulley

Drive Pulley Adjustment (if equipped)

⚠ WARNING

Remove tether cord cap from engine cut-off switch before performing any adjustment. Vehicle must be parked in a safe place, away from the trail.

⚠ WARNING

NEVER disassemble or modify the drive pulley.

Improper assembly or modifications could cause the pulley to explode violently under the stress generated by the high rotational speed.

Visit your BRP snowmobile dealer to maintain or service the drive pulley. Improper servicing or maintenance may affect performance and reduce belt life. Always respect maintenance schedules.

The drive pulley is factory calibrated to transmit maximum engine power at a predefined RPM. Factors such as ambient temperature, altitude or surface condition may vary this critical engine RPM thus affecting snowmobile efficiency.

This adjustable drive pulley allows setting maximum engine RPM to maintain maximum power.

Ramp cams should be adjusted so that actual maximum engine RPM matches the maximum horsepower RPM. Refer to *Technical Specifications* (Engine).

NOTE:

Use a precision digital tachometer for engine RPM adjustment.

There are 5 positions in which the ramp cam can be set.

Each position modifies the maximum engine RPM by about 200 RPM.


Lower position numbers decrease engine RPM in steps of 200 RPM and higher position numbers increase it in steps of 200 RPM.

Procedure

- 1. Refer to Body and Seat in Vehicle Information and remove:
 - LH side panel
 - Drive pulley guard

MAINTENANCE PROCEDURES

2. Locate the cam and the pivot screw on the drive pulley.

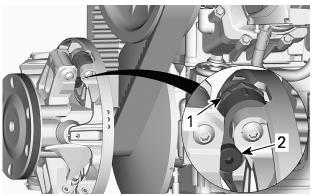


TYPICAL

- 1. Cam
- 2. Pivot screw

The cam position is identified as follows:

- Positions 1, 2, 4 and 5 are numbered.
- Position 3 (middle) is identified by a notch.
- There are notches on each side of the cam used as pointers.

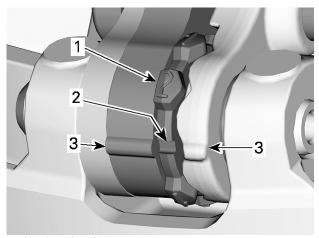


- Numbered position
 Position 3 Notch
- 3. Pointers

To adjust, proceed as follows for all 3 cams:


3. Using the Allen end of the driven pulley expander, loosen the pivot screw.

MAINTENANCE PROCEDURES

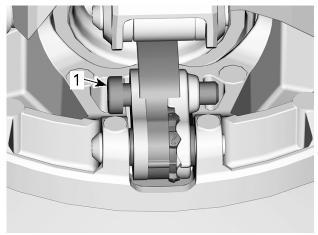

1. Pivot screw

- 4. Move the right lever aside to be able to turn the cam.5. Turn cam to the desired position.

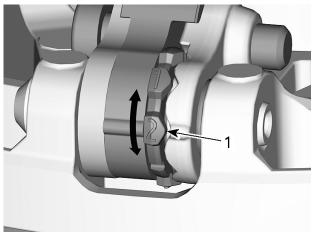

- 1. Desired cam position (here #2)
- 6. Tighten the pivot screw.

| TIGHTENING TORQUE | |
|-------------------|--------------------------|
| Pivot | 8 ± 1 Nm (71 ± 9 lbf-in) |

NOTICE

Always adjust all 3 cams to the same setting.

Track

Track Condition

⚠ WARNING

Remove tether cord cap from engine cut-off switch before performing any maintenance or adjustment, unless otherwise specified. Vehicle must be parked in a safe place, away from the trail.

Remove tether cord cap from engine cut-off switch.

MAINTENANCE PROCEDURES

Lift the rear of the snowmobile and support it with a wide-base snowmobile mechanical stand with a rear deflector panel. With the engine off, rotate the track by hand, and inspect condition. If worn or cut, or if track fibers are exposed, or if missing or defective inserts or guides are noted: contact an authorized BRP snowmobile dealer.

Snowmobiles Equipped with Traction Enhancing Products

If your snowmobile is equipped with a BRP approved studded track, PROCEED WITH A VISUAL INSPECTION OF YOUR TRACK BEFORE EACH USE.

Look for any defects, such as:

- Perforations in the track
- Tears in the track (particularly around traction holes on studded tracks)
- Lugs that are broken or torn off, exposing portions of rods
- Delamination of the rubber
- Broken rods
- Broken studs (studded tracks)
- Bent studs (studded tracks)
- Missing studs
- Studs that are torn off the track
- Missing track guide(s)
- Also, ensure that studs nut are tighten to the recommended torque.

On approved studded tracks, replace broken or damaged studs immediately. If your track shows signs of deterioration, it must be replaced immediately. When in doubt, ask your dealer.

⚠ WARNING

Riding with a damaged track or studs could lead to a loss of control.

For complete information on traction enhancing products, refer to *TRACTION ENHANCING PRODUCTS* in *SAFETY INFORMATION* at the beginning of this Operator's Guide.

Track Tension and Alignment

NOTF:

Track tension and alignment are interrelated. Do not adjust one without the other.

⚠ WARNING

To prevent serious injury to individuals near the snowmobile:

- NEVER stand behind or near a moving track.
- Always use a wide-base snowmobile stand with a rear deflector panel if it is necessary to rotate track.
- When the track is raised off the ground, only run it at the lowest possible speed.

Centrifugal force could cause debris, damaged or loose studs, pieces of torn track, or an entire severed track to be violently thrown backwards out of the tunnel with tremendous force, possibly resulting in the loss of a leg or other serious injury.

Verifying the Track Tension

NOTE:


Ride the snowmobile in snow about 15 to 20 minutes prior to adjusting track tension.

- Remove tether cord cap from engine cut-off switch.
- 2. Lift rear of vehicle and support it off the ground.

A CAUTION

Use proper lifting techniques, notably using your legs force. Do not attempt to lift the rear of vehicle if it is above your limits.

- 3. Allow rear suspension to fully extend.
- 4. Prepare the tensiometer.



 Set the bottom O-ring as per the Track Deflection from the applicable vehicle in the Technical Specifications table.


MAINTENANCE PROCEDURES




- 1. Bottom O-ring
 - 2. Place the upper O-ring to 0 kgf (0 lbf).



- 1. Upper O-ring
- Position the tensiometer on track, halfway between front and rear idler wheels.
- Push the tensiometer downwards until bottom O-ring (deflection set earlier) be aligned with the bottom of slider shoe.

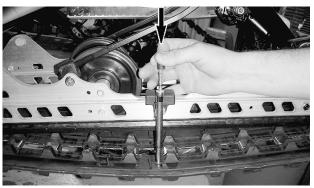

TYPICAL

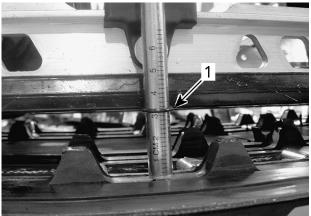

TYPICAL

- 1. Deflection O-ring aligned with slider shoe
- 7. Read load recorded by the upper O-ring on the tensiometer.



TYPICAL - LOAD READING

- 1. Upper O-ring
- 8. Load reading must be as per the track deflection in the *Technical Specifications*.
- If load reading is not in accordance with the specification, adjust track tension. Refer to *Track Tension Adjustment*.


Adjusting the Track Tension - EasyRide-F Suspension

- 1. Remove the tether cord cap from engine cut-off switch.
- 2. Lift rear of vehicle and support it off the ground.

A CAUTION

Use proper lifting techniques, notably using your legs force. Do not attempt to lift the rear of vehicle if it is above your limits.

- 3. Allow rear suspension to fully extend.
- 4. Remove rear wheel caps.
- 5. Loosen the rear idler wheels retaining screws.
- Tighten or loosen both adjustment screws to increase or decrease track tension.

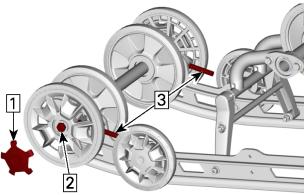

EASYRIDE-F

- 1. Remove cap
- 2. Loosen the idler wheel screw
- 3. Loosen or tighten adjustment screws
- If correct tension is unattainable, contact an authorized BRP snowmobile dealer.
- 8. Retighten idler wheels retaining screws to specification.

| TIGHTENING TORQUE | |
|-------------------|---------------------------|
| Idler wheel screw | 48 ± 6 Nm (35 ± 4 lbf-ft) |

9. Check track alignment as described below.

Aligning the Track

A WARNING

Before checking track alignment, ensure that the track is free of all particles which could be thrown out while track is rotating. Keep hands, tools, feet and clothing clear of track. Always lift the snowmobile on a wide-base stand with a rear deflector panel. Ensure no one is standing in close proximity to the snowmobile, especially at the rear of the track. Never rotate track at high speed.


Centrifugal force could cause debris, damaged or loose studs, pieces of torn track, or an entire severed track to be violently thrown backwards out of the tunnel with tremendous force.

Lift rear of vehicle and support it off the ground.

CAUTION


Use proper lifting techniques, notably by using the force of your legs. Do not attempt to lift the rear of vehicle if it is above your limits.

- Start engine and accelerate slightly so that track slowly turns. This must be done in a short period of time (15 to 20 seconds).
- Check that the track is well centered; equal distance on both sides between edges of track guides and slider shoes.

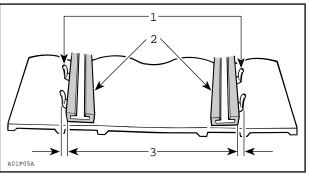

- Guides
- Slider shoes
- 3. Equal distance

4. To correct track alignment:

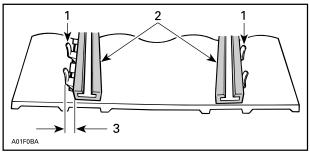

- 1. Guides
- 2. Slider shoes
- 3. Tighten on this side
 - 1. Stop engine.
 - Remove tether cord cap from engine cut-off switch.

♠ WARNING

Remove tether cord cap from engine cut-off switch before performing any maintenance or adjustment, unless otherwise specified. Vehicle must be parked in a safe place, away from the trail.

- 3. Loosen the rear axle nut.
- Tighten adjustment screw on side where the slider shoe is the farthest from the track insert guides.
- 5. Tighten the rear axle nut.

↑ WARNING

Properly tighten wheel retaining bolt, otherwise wheel may come off and cause track to "lock".

- 6. Restart engine and rotate track slowly to recheck alignment.
- 7. Tighten the rear axle nut to specified torque.

| Tightening Torque | |
|-------------------|---------------------------|
| Rear axle screw | 48 ± 6 Nm (35 ± 4 lbf-ft) |

8. Reposition snowmobile on the ground.

Suspension

Rear Suspension Condition

Visually inspect all suspension components including slider shoes, springs, wheels, etc.

NOTE:

During normal driving, snow will act as a lubricant and coolant for the slider shoes. Extensive riding on ice or sanded snow, will create excessive heat build-up and cause premature slider shoe wear.

Suspension Stopper Strap Condition


Inspect stopper straps for wear and cracks, bolt and nut for tightness. If loose inspect holes for deformation. Replace as required. Tighten nut to specification.

| Tightening Torque | |
|-------------------|--------------------------|
| Stopper strap nut | 7 ± 1 Nm (62 ± 9 lbf-in) |


Suspension Lubrication - EasyRide+

Lubricate the following suspension pivots at grease fittings. Refer to *Maintenance Schedule* for maintenance frequency.


| Suspension Grease |
|---------------------------------|
| XPS Synthetic suspension grease |

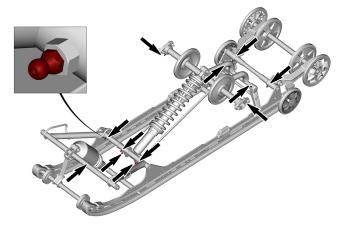

EASY RIDE+ ARTICULATED (IF EQUIPPED)

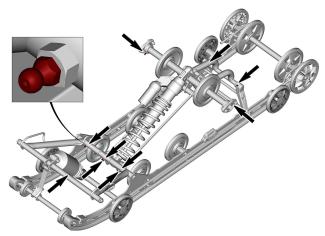

EASY RIDE+ FS (IF EQUIPPED)

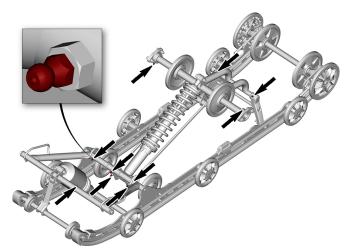

EASY RIDE+ FT (IF EQUIPPED)

Steering and Front Suspension Condition

Visually inspect steering and front suspension for tightness of components (steering arms, control arms and links, tie rods, ball joints, ski bolts, ski legs, etc.). If necessary, contact an authorized BRP snowmobile dealer.

Skis

Wear and Condition of Skis and Runners

Check the condition of the skis and ski runner carbides. If worn, contact an authorized BRP snowmobile dealer.

A WARNING

Excessively worn skis and/or ski runners will adversely affect snowmobile control.


Fuses

Access to Fuse Block

Open RH side panel, refer to Body and Seat.

Fuse Location


Fuse Holder (FA)

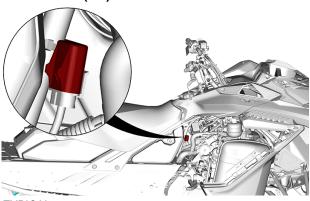

TYPICAL

Fuse Box (FB1) - Except 16" Tunnel Models

This fuse box is located behind the RH side panel, in line with the fuel cap.

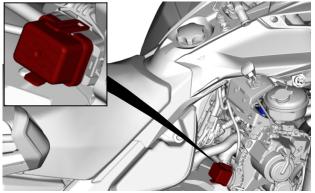


TYPICAL

Fuse Inspection

Check fuse condition and replace it if necessary.

To remove fuse from holder, pull fuse out. Check if filament is melted.

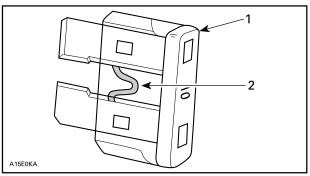

- 1. Fuse
- 2. Check if melted

A WARNING

Do not use a higher rated fuse.


A WARNING

If fuse has burnt out, source of malfunction should be determined and corrected before restarting. See an authorized BRP snowmobile dealer for servicing.

Headlights

Headlights Bulb Replacement

- Remove the windshield. Refer to Removing the Windshield in Body and Seat subsection.
- Open the storage compartment.

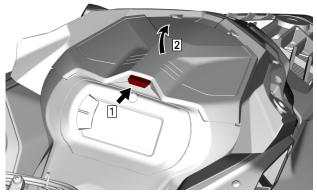


TYPICAL


3. Remove the gauge support retaining screws.




4. Lift the front of the gauge support, then slide it forward to remove it.

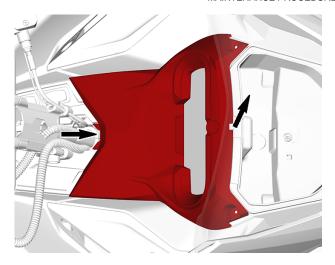

- 5. Set gauge support aside.6. Remove the storage compartment.

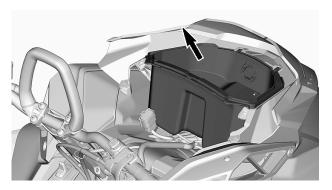


- 7. Disconnect 12V power outlet connectors to remove (if equipped).8. Disconnect bulb connector.

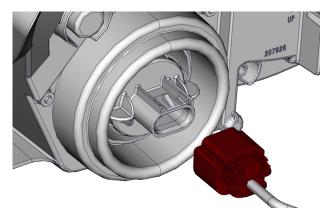

9. Unlock bulb by turning it counterclockwise. 10. Pull bulb out.

NOTE:

Ensure bulb seal stays in place.

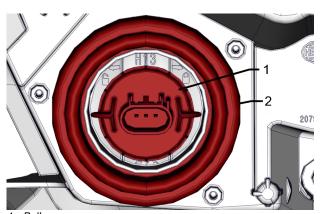

1. Bulb 2. Bulb seal

Install a new bulb using the reverse of the removal procedure.


NOTICE

Never touch glass portion of an halogen bulb with bare fingers, it shortens its operating life. If glass is touched, clean it with isopropyl alcohol which will not leave a film on the bulb.

Check headlights operation.


Headlights Beam Aiming

Open the storage compartment.

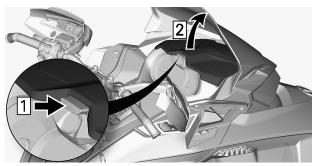

TYPICAL

Turn the adjustment screw to reach desired beam height.

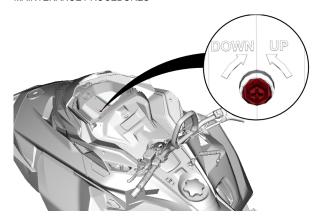


Battery

500 mm (20 in.) Tunnel Width


Removing the Battery

- 1. Remove the passenger seat and backrest, if equipped.
- Open the cargo box, remove the battery cover and all mounting screws.

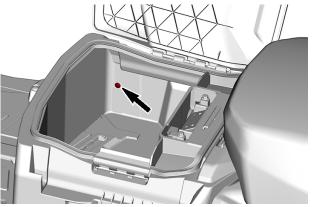

LH SIDE SCREW SHOWN


3. Remove the cargo box.

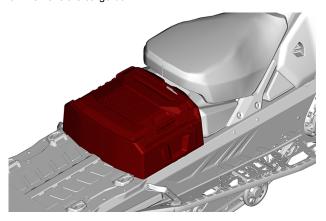


4. Disconnect the negative terminal first, then the positive terminal.

NOTICE


Battery BLACK (–) cable must always be disconnected first and connected last.

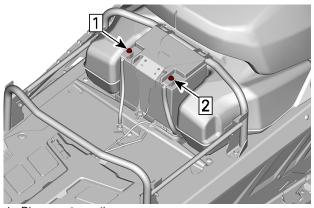

- Disconnect negative
 Disconnect positive
- 5. Remove the battery hold down bracket.

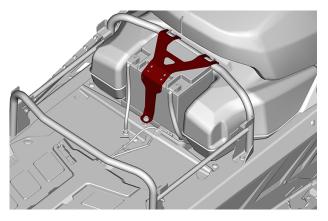

6. Remove the battery.

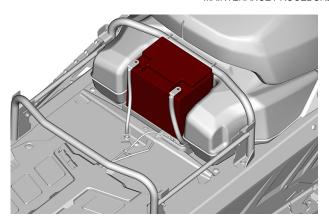

Cleaning the Battery

Clean battery casing and battery posts using a soft brush and a solution of baking soda and water.

Remove corrosion from battery cable terminals and battery posts using a firm wire brush.

Rinse with clear water then dry well.

Charging the Battery

Use any automotive type battery charger. Always refer to the battery charger manufacturer's instructions.

Installing the Battery

The installation is the reverse of the removal procedure. However, pay attention to the following details.

| TIGHTENING TORQUE | |
|---|----------------------------|
| Battery terminals (positive and negative) | 10 ± 2 Nm (89 ± 18 lbf-in) |
| Battery hold down bracket | 5 ± 0.5 Nm (44 ± 4 lbf-in) |
| Battery cover retaining screws | 5 ± 0.5 Nm (44 ± 4 lbf-in) |

VEHICLE CARE

Post-Operation Care

Remove snow and ice from rear suspension, track, front suspension, steering mechanism and skis.

. WARNING

Make sure D.E.S.S. key is removed from D.E.S.S. post before standing in front the vehicle, getting close to the track or rear suspension components.

Always cover your snowmobile when leaving it outside overnight or during extended periods of inactivity. This will protect it from frost and snow as well as help retain its appearance.

Vehicle Cleaning and Protection

Wash snowmobile using water mixed with a mild detergent.

Use only microfiber cloths or an equivalent.

NOTICE

Never use a high pressure washer to clean the vehicle. Use low pressure only, like a garden hose.

Non Compatible Cleaning Products

| Material Type | Non-Compatible Cleaning Products |
|---|--|
| All plastics, vinyls, painted steel and aluminium | BRAKE AND PARTS CLEANER OR ANY PETROLEUM BASE CLEANING PRODUCTS |

Compatible Cleaning Products

| Material Type | Cleaning Product |
|-----------------------|---------------------------------|
| All plastics, vinyls, | Automotive type soap with water |
| painted steel and | XPS Spray Cleaner and Polish |
| aluminium. | XPS All Purpose Cleaner |

For more information and products, Visit the XPS Products website at www.xpslubricants.com

STORAGE

During summer, or when a snowmobile is not in use for more than three months, proper storage is necessary.

Storage

Clean the vehicle

Add fuel stabilizer to fuel following the product manufacturer recommendations.

Run the engine after adding the product to the fuel

Lubricate engine. Refer to *Engine Storage Procedure* in this section.

Lubricate brake lever pivot

Lubricate rear suspension

Charge battery monthly to keep it fully charged during storage (if equipped)

Block muffler outlet with rags

Lift rear of vehicle until track is clear of the ground. Do not release track tension

CAUTION

Use appropriate lifting device or have assistance to share lifting stress. If a lifting device is not used, use proper lifting techniques, notably using your legs force. Do not attempt to lift the rear of vehicle if it is above your limits.

NOTICE

The snowmobile has to be stored in a cool and dry place and covered with an opaque but ventilated tarpaulin. This will prevent sun rays and grime from affecting plastic components and vehicle finish.

NOTICE

Fuel stabilizer should be added prior to engine lubrication to prevent the loss of the chemical properties of fuel and protect the fuel system against varnish deposits.


Engine Storage Procedure

The engine has to be properly lubricated at storage for internal parts protection.

E-TEC ENGINE STORAGE PROCEDURE

E-TEC Engine - 7.2" Digital Display

This section must be used with this type of Multifunction Switch.

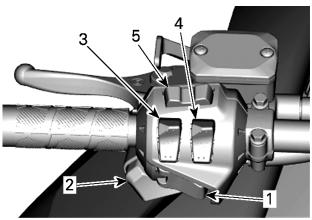


- Start/Electronic Reverse button
 Headlights dimmer switch
- 3. Heated grips switch
- 4. Heated throttle lever switch
- 5. Mode/set button (If equipped)

Follow these simple steps.

To engage the procedure, do the following:

- Place the vehicle in a well ventilated area.
- 2. Start the engine and let it run at idle speed until it reaches its operating temperature (watch the coolant temperature on the display or verify the rear heat exchanger becomes warm). The engine temperature must be above 36 °C (97 °F).
- 3. Push the SET (S) button to select odometer mode.

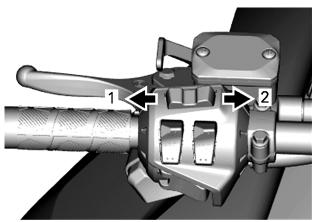

- Volume DOWN/Cancelling a call
 Volume UP/Answering a call



NOTE:

The storage mode does not function in other modes (trip A, trip B and hr trip).

Repeatedly depress the HI/LOW beam switch rapidly, then, while doing this, press and hold the SET (S) button until PRESS/HOLD BUTTON FOR OIL INJECTION appears on the display.



TYPICAL

- Release all buttons when gauge displays PUSH (S) appears.
 Again, press and hold the SET (S) button for 2 3 seconds.

NOTF:

The gauge will display OIL when the storage procedure is initiated.

7. When gauge displays OIL, release button and wait for the lubrication function to end



TYPICAL

Do not touch anything during engine lubrication cycle.

The engine lubrication function takes approximately 1 minute. During this time the engine RPM will increase slightly to approximately 1600 RPM and the oil pump will "oil flood" the engine.

At the end of engine lubrication procedure, the ECM will turn the engine off.

Remove tether cord cap from engine cut-off switch.

NOTICE

Do not start the engine during storage period.

E-TEC Engine - Large Panoramic 7.8" Wide LCD Display


Follow these simple steps.

To engage the procedure, do the following:

- 1. Place the vehicle in a well ventilated area.
- Start the engine and let it run at idle speed until it reaches its operating temperature (watch the coolant temperature on the display or verify the rear heat exchanger becomes warm).
- Using the rotary control, select the trip display but stay in odometer mode.



 Repeatedly depress the HI/LOW beam switch rapidly, then, while doing this, press and hold the Volume Down/ Cancelling Call button until the following message appears on the display.

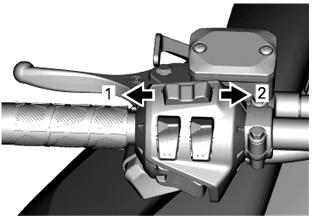

- Volume DOWN/Cancelling a call
 Volume UP/Answering a call




- Release all buttons when the gauge displays the message.
 Again, press and hold the Volume Down/ Cancelling Call button for 2 3 seconds.

NOTE:

The gauge will display OIL when the storage procedure is initiated.

When gauge displays OIL, release button and wait for the lubrication function to end.

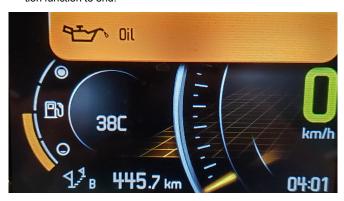

Do not touch anything during engine lubrication cycle.

The engine lubrication function takes approximately 1 minute. During this time the engine RPM will increase between 1500 and 2000 RPM and the oil pump will "oil flood" the engine.

At the end of engine lubrication procedure, the ECM will turn the engine off.

Remove tether cord cap from engine cut-off switch.

NOTICE

Do not start the engine during storage period.

PRESEASON PREPARATION

Proper vehicle preparation is necessary when a vehicle has not been used for more than three months.

Using the *maintenance schedule*, perform the items titled *EVERY YEAR AT PRESEASON*.

Visit your authorized BRP snowmobile dealer for more information.

MAINTENANCE RECORDS

Send photocopy of maintenance record to BRP if needed.

| Pre-delivery | | |
|------------------|---|-------------------|
| Serial number: | | Signature/Print: |
| Mileage / km: | | |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| Refer to | vehicle Pre-Delivery Bulletin for deta procedures | iled installation |

MAINTENANCE RECORDS

| | First inspection | |
|-----------------------------|--|------------------|
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For mai | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | Service | |
| | | |
| Mileage / km: | | Signature/Print: |
| | | Signature/Print: |
| km: | | Signature/Print: |
| km: Hours: | | Signature/Print: |
| km: Hours: Date: Dealer | | Signature/Print: |
| km: Hours: Date: Dealer no: | | Signature/Print: |
| km: Hours: Date: Dealer no: | | Signature/Print: |

| Mileage / km: | | Signature/Print: |
|------------------|--|------------------|
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For main | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | Service | |
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For mail | ntenance schedule refer to Maintenar section of this operator's guide | |

Service

MAINTENANCE RECORDS

| | Service | |
|-----------------------------|--|------------------|
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For main | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | | |
| | Service | |
| Mileage / km: | Service | Signature/Print: |
| | Service | Signature/Print: |
| km: | Service | Signature/Print: |
| km: Hours: | Service | Signature/Print: |
| km: Hours: Date: Dealer | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |

| Mileage / km: | | Signature/Print: |
|------------------|--|------------------|
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For mail | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | Service | |
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| | | |

Service

MAINTENANCE RECORDS

| | Service | |
|-----------------------------|--|------------------|
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For main | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | | |
| | Service | |
| Mileage / km: | Service | Signature/Print: |
| | Service | Signature/Print: |
| km: | Service | Signature/Print: |
| km: Hours: | Service | Signature/Print: |
| km: Hours: Date: Dealer | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |

| Mileage / km: | | Signature/Print: |
|-------------------------|--|--------------------|
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For main | ntenance schedule refer to Maintenan section of this operator's guide | |
| | | |
| | Service | |
| Mileage / km: | | Ciara atrus /Driet |
| 14111. | | Signature/Print: |
| Hours: | | Signature/Print: |
| | | Signature/Print: |
| Hours: | | Signature/Print: |
| Hours: Date: Dealer | | Signature/Print: |
| Hours: Date: Dealer no: | | Signature/Print: |
| Hours: Date: Dealer no: | | Signature/Print: |

Service

MAINTENANCE RECORDS


| | Service | |
|-----------------------------|--|------------------|
| Mileage / km: | | Signature/Print: |
| Hours: | | |
| Date: | | |
| Dealer no: | | |
| Notes: | | |
| | | |
| | | |
| For main | ntenance schedule refer to Maintenar section of this operator's guide | |
| | | |
| | | |
| | Service | |
| Mileage / km: | Service | Signature/Print: |
| | Service | Signature/Print: |
| km: | Service | Signature/Print: |
| km: Hours: | Service | Signature/Print: |
| km: Hours: Date: Dealer | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |
| km: Hours: Date: Dealer no: | Service | Signature/Print: |

TECHNICAL INFORMATION

VEHICLE IDENTIFICATION

Vehicle Description Decal

Vehicle description decal is located on right hand side of tunnel.

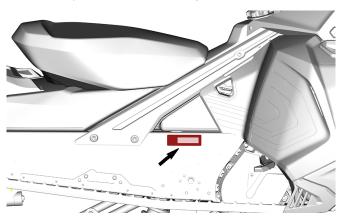



FOR NORTH AMERICAN MARKET



FOR EUROPEAN MARKET


Identification Numbers

The main components of your snowmobile (engine and frame) are identified by different identification numbers. It may sometimes become necessary to locate these numbers for warranty purposes or to trace your snowmobile in the event of loss. These numbers are required by the authorized BRP snowmobile dealer to complete warranty claims properly. We strongly recommend that you take note of all the identification numbers on your snowmobile and supply them to your insurance company.


Vehicle Identification Number (VIN)

VIN is scribed on vehicle description decal. See above. It is also engraved on tunnel near vehicle description decal.

Model number and model year are part of the information found in the VIN. See illustration.

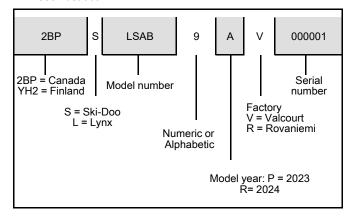

Engine Identification Number Location



1. Engine identification number

COMPLIANCE LABELS

EPA Compliance Label



EPA COMPLIANCE LABEL




TYPICAL


SSCC Label

Safety standards for snowmobiles have been adopted by the Snowmobile Safety and Certification Committee (SSCC) of which BRP is a proud participating member. Assurance that your snowmobile meets these standards is easily checked by locating the Certification Label on a right vertical portion of the vehicle.

The following label shows that an independent testing laboratory has verified compliance with the SSCC safety standards.

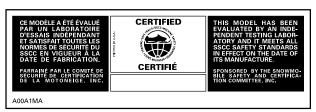


SSCC LABEL

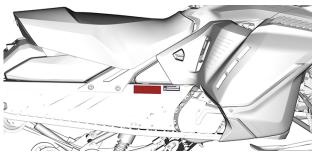


TYPICAL

Regulation (EU) 2016/1628 applicable for Non-Road Mobile Machineries

Vehicles who comply to Regulation (EU) 2016/1628 (NRMM) are identified on the engine.

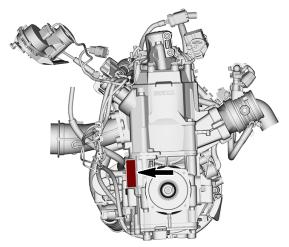

TYPICAL



TYPICAL - NRMM IDENTIFICATION LABEL

e13 SMB/P V-####

NOISE EMISSION AND VIBRATION VALUES

| MODEL | | 850 E-TEC |
|--|--------------------------------------|---|
| NOISE EMISSION AND VIBRATION VALUES ¹ | | |
| Noise | Sound power level (L _{WA}) | 100 dB (Uncertainty (K _{wa}) 3 dB) |
| Noise Sound pressure (L _{pA}) | | 86 dB (Uncertainty (K _{pA}) 3 dB) |
| Vibration | Hand-arm system | <2.5 m/s ² |
| VIDIATION | Whole body at seat | <0.5 m/s ² |

^{1:} Noise emission and Vibration values are measured in accordance with Annexes A and B of ISMA 1 regulation on a snow covered or grass surface in neutral or without belt.

EU DECLARATION OF CONFORMITY



BRP Finland Oy PL 8040 (Isoasvantie 7) FI-96101 Rovaniemi, Finlan T 358 40 800 7700 F 358 16 318 114

EU Declaration of Conformity

Authorized Representative: BRP Europe N.V., Skaldenstraat 125, Gent, Belgium, 9042 This declaration of conformity is issued under the sole responsibility of the manufacturer.

The undersigned, representing the manufacturer, hereby declares that model year 20: Snowmobiles marked with the C€ mark and a 17-character vehicle identification numb (VIN) structured as YH2LxxxxxSRxxxxxx under commercial name Lynx comply with all ti relevant provisions of the following Directives and Regulations:

| Machinery Directive 2006/42/EC as amended up to and including Reg. 2019/1243/EU | ISO 12100:2010 |
|---|--|
| Non-Road Mobile Machinery (NRMM) Regulation (EU) 2016/1628 on gaseous pollutants | Category SMB, Stage V emissions limits |
| Electromagnetic Compatibility (EMC) Directive 2014/30/EU as amended up to and including Reg. (EU) 2018/1139 | CISPR 12:2007/A1:2009 & IEC 61000-6-1:2005 or UN R10.04 or later version |
| Battery Directive 2006/66/EC as amended up to and including Dir. (EU) 2018/849 | EN 50342-7:2015 |
| Radio Equipment (RED) Directive 2014/53/EU as amended up to and including Reg. 2018/1139 (If fitted with radio frequency (RF) D.E.S.S. key) | IEC 62368-1:2014 |
| | CISPR 25:2016 |
| | ISO 11452-2:2004 |
| | ETSI EN 300 330 V2.1.1:2017 |

Risto Perttula

Director, Research and Development, Lynx BRP Finland Oy

Rovaniemi, Finland

December 4th, 2023

SKI-DOO LYNX SEG-200 EVIRUDE ROTAX CON-OM

UK DECLARATION OF CONFORMITY



BRP Finland Oy PL 8040 (Isosavantie 7) FI-96101 Rovaniemi, Finland T 358 40 800 7700 F 359 16 318 114

www.brn.com

UK Declaration of Conformity

Authorized Representative: BRP Recreational Products UK Ltd., Castle Chambers, 43 Castle Street, Liverpool, L2 9SH

This declaration of conformity is issued under the sole responsibility of the manufacturer.

The undersigned, representing the manufacturer, hereby declares that model year 2025 Snowmobile marked with the Ehmark and a 17-character vehicle identification number (VIN) structured as YHZLXXXXXSRXXXXXX under commercial name Lynx comply with all the relevant provisions of the following UK Statutory instrument and Regulations:

| The Supply of Machinery (Safety) Regulations 2008, UK Statutory Instrument 2008/1597 as amended up to and including SI 2020/1112 | ISO 12100:2010 |
|---|--|
| Non-Road Mobile Machinery (Type-Approval and Emission of Gaseous and Particulate Pollutants) Regulation 2018, UK SI 2018/764 as amended up to and including SI 2020/1393 | Category SMB, Stage V emissions limits |
| Electromagnetic Compatibility Regulations 2016, UK SI 2016/1091 as amended up to and including SI 2020/1112 | CISPR 12:2007/A1:2009 & IEC 61000-6-1:2005 or UN R10.04 or later version |
| Batteries and Accumulators (Placing on the Market) Regulations 2008, UK SI 2008/2164 as amended up to and including UK SI 2020/904 | EN 50342-7:2015 |
| Radio Equipment Regulations 2017, UK SI 2017/1206 as amended up to and including SI 2020/1112 | IEC 62368-1:2014 CISPR 25:2016 ISO 11452-2:2004 ETSI EN 300 330 V2.1.1:2017 |

Risto Perfula Director, Research and Development, Lynx BRP Finland Oy

Rovaniemi, Finland

December 4th, 2023

SKI-daa LYNX SEC-200. EVIRUDE ROTAX CAN-AM

EPA CERTIFIED ENGINES

Engine Emissions Information

Manufacturer's Responsibility

Snowmobile manufacturers of snowmobile engines need to determine the exhaust emission levels for each engine horsepower family and certify these engines with the United States of America Environmental Protection Agency (EPA). An emissions control information label, showing emission levels and engine specifications, must be placed on each vehicle at the time of manufacture.

Dealer's Responsibility

When performing service on a certified BRP snowmobiles that carry an emissions control information label, adjustments must be kept within published factory specifications.

Replacement or repair of any emission related component must be executed in a manner that maintains emission levels within the prescribed certification standards.

Dealers are not to modify the engine in any manner that would alter the horsepower or allow emission levels to exceed their predetermined factory specifications.

Exceptions include manufacturer's prescribed changes, such as altitude adjustments for example.

Owner's Responsibility

The owner / operator is required to have engine maintenance performed to maintain emission levels within prescribed certification standards.

The owner / operator is not to, and should not allow anyone to modify the engine in any manner that would alter the horsepower or allow emissions levels to exceed their predetermined factory specifications.

EPA Emission Regulations

All BRP snowmobiles manufactured by BRP are certified to the EPA as conforming to the requirements of the regulations for the control of air pollution from new snowmobile engines. This certification is contingent on certain adjustments being set to factory standards. For this reason, the factory procedure for servicing the product must be strictly followed and, whenever practicable, returned to the original intent of the design.

The responsibilities listed above are general and in no way a complete listing of the rules and regulations pertaining to the EPA requirements on exhaust emissions for snowmobile products. For more detailed information on this subject, you may contact the following locations:

EPA CERTIFIED ENGINES

MAIL:

U.S. Environmental Protection Agency Certification Division Gasoline Engine Compliance Center 2000 Traverwood Drive Ann Arbor MI 48105 USA

INTERNET WEB SITE:

www.epa.gov/otaq/

BRP RF DESS POST GEN2 (MOWP)

USA and Canada

This device complies with FCC Part 15 and Industry Canada license exempt RSS standard(s). Operation is subject to the following two conditions:

- this device may not cause interference, and
- this device must accept any interference, including interference that may cause undesired operation of the device.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However. there is no guarantee that interference will not occur in a particular installation. equipment does cause harmful interference to radio or television reception, which can be deby termined ' turnina equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected

 Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Le dispositif a été évalué à satisfaire l'exigence générale de l'exposition aux rf. L'appareil peut être utilisé dans des conditions d'exposition portatif sans restriction.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

- l'appareil ne doit pas produire de brouillage, et
- I'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC: 12006A-1001301698 For variant 1001298626

FCC ID: 2ACER1001301698 For variant 1001298626

Mexico

IFETEL



Marca: BRP Megatech

Número: BRME1023-28175

BRP Megatech Certificate num-

ber: 1451074

Modelo: 1001298626

NOM-208-SCFI-2016 (Disposición Técnica IFT-008-2015)

La operación de este equipo está sujeta a las siguientes dos condiciones:

- Es posible que este equipo o dispositivo no cause interferencia perjudicial y
- Este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada

Brazil



Número: 05248-23-15603

BRP Megatech Certificate num-

ber: 1451077

Modelo: 1001298626

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Para maiores infor- mações, consulte o site da ANATFI

Japan

This device is granted pursuant to the Japanese Radio Law (

電波法

电似态) and the Japanese Telecommunications Business

Law (電気通信事業法). This device should not be modified (otherwise the granted designation number will become invalid).

Europe

Declaration of Conformity

Simplified EU Declaration of Conformity according Radio Equipment Directive 2014/ 53/F11



DF

Hiermit erklärt BRP Megatech, dass der Funkanlagentyp 1001316154 der Richtlinie 2014/ 53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: https://www.brp.com/en/ corporate-social-responsibility/ product-safety.html

FR

Le soussigné, BRP Megatech, déclare que l'équipement radioélectrique du type 1001316154 est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

BG

С настоящото BRP Megatech декларира, че този тип радиосъоръжение 1001316154 е в съответствие с Директива 2014/53/EC.

Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: https://www.brp. com/en/corporate-social-responsibility/product-safety.

EL

Με την παρούσα ο/η BRP Megatech, δηλώνει ότι ο ραδιοεξοπλισμός 1001316154 πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

CS

Tímto BRP Megatech prohlašuje, že typ rádiového zařízení 1001316154 je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese:https://www.brp.com/en/ corporate-social-responsibility/ product-safety.html

DA

Hermed erklærer BRP Megatech, at radioudstyrstypen 1001316154 er i overensstemmelse med direktiv 2014/53/EU.

EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse:https://www.brp.com/en/corporate-social-responsibility/product-safety.html

ET

Käesolevaga deklareerib BRP Megatech, et käesolev raadioseadme tüüp 1001316154 vastab direktiivi 2014/53/EL nõuetele.

ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: https:// www. brp. com/en/corporate-social-responsibility/product-safety.html

ES

Por la presente, BRP Megatech declara que el tipo de equipo radioeléctrico 1001316154 es conforme con la Directiva 2014/ 53/UE.

El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: https://www.brp. com/en/corporate-social-responsibility/product-safety.html

FΙ

BRP Megatech vakuuttaa, että radiolaitetyyppi 1001316154 on direktiivin 2014/53/EU

mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

ΕN

Hereby, BRP Megatech declares that the radio equipment type 1001316154 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

HR

BRP Megatech ovime izjavljuje da je radijska oprema tipa 1001316154 u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

HU

BRP Megatech igazolja, hogy a 1001316154 típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

IT

Il fabbricante, BRP Megatech, dichiara che il tipo di apparecchiatura radio 1001316154 è conforme alla direttiva 2014/53/

Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: https://www. brp. com/ en/corporate-social-responsibility/product-safety.html

LT

Aš, BRP Megatech, patvirtinu, kad radijo įrenginių tipas 1001316154 atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

LV

Ar šo BRP Megatech deklarē, ka radioiekārta 1001316154 atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

MT

B'dan, BRP Megatech, niddikjara li dan it-tip ta' tagħmir tar-radju 1001316154 huwa konformi mad-Direttiva 2014/53/ UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: https://www. brp. com/ en/corporate-social-responsibility/product-safety.html

NL

Hierbij verklaar ik, BRP Megatech, dat het type radioapparatuur 1001316154 conform is met Richtlijn 2014/53/EU.

De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: https://www.brp.com/en/corporate-social-responsibility/product-safetv.html

PL

BRP Megatech niniejszym oświadcza, że typ urządzenia radiowego 1001316154 jest zgodny z dyrektywą 2014/53/ UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: https://www.brp. com/en/corporate-social-responsibility/product-safety.html

PT

O (a) abaixo assinado (a) BRP Megatech declara que o presente tipo de equipamento de rádio 1001316154 está em conformidade com a Diretiva 2014/53/UE.

O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

RO

Prin prezenta, BRP Megatech declară că tipul de echipamente radio 1001316154 este în conformitate cu Directiva 2014/53/UE. Textul integral al declaratiei UE de conformitate este disponibil la următoarea adresă internet: https://www. brp. com/en/corporate-social-responsibility/product-safety.html

SV

Härmed försäkrar BRP Megatech att denna typ av radioutrustning 1001316154 överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: https://www.brocm/en/corporate-social-responsibility/product-safety.html

SL

BRP Megatech potrjuje, da je tip radijske opreme 1001316154 skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

SK

BRP Megatech týmto vyhlasuje, že rádiové zariadenie typu 1001316154 je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: https://www. brp. com/en/ corporate-social-responsibility/ product-safety.html

IS

BRP Megatech lýsir því hér með yfir að þráðlausi fjarskiptabúnaðurinn 1001316154 er í samræmi við tilskipun 2014/53/ESB. Óstyttan texta ESB-samræmisyfirlýsingarinnar er að finna á veffanginu:https://www.brp.com/en/corporate-social-responsibility/product-safety.html

Liechtenstein

Hiermit erklärt BRP Megatech, dass der Funkanlagentyp 1001316154 der Richtlinie 2014/ 53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: https://www.brp.com/en/ corporate-social-responsibility/ product-safety.html

NO

Hermed erklærer BRP Megatech at radioutstyrstypen 1001316154 er i samsvar med direktiv 2014/53/EU. Hele teksten i EU-samsvarserklæringen finnes på følgende internettadresse: https://www.brp.com/en/corporate-social-responsibility/product-safety.html

RU

Компания BRP Megatech настоящим заявляет, что радиотехническое оборудование категории 1001316154 отвечает требованиям Директивы 2014/53/EU.

Полный текст декларации соответствия EC доступен на сайте https://www. brp. com/en/corporate-social-responsibility/product-safety.html

Technical Information

Transmitter:

BT operating frequency range: 2402 – 2480 MHz

BT version: 4.2 (no BTLE)
BT output power: < 8.5 dBm

Receiver:

FM operating range: 76 - 108 MHz

Manufacturer and Address

Manufacturer:

Robert Bosch LLC

Address:

 38000 Hills Tech Drive, Farmington Hills, MI 48331, USA

To display the regulatory information on the vehicle digital display: From the home screen, access the main menu and keep the joystick pressed down for more than 10 seconds.

USA and Canada

This device complies with FCC Part 15 and Industry Canada license exempt RSS standard (s). Operation is subject to the following two conditions:

- 1. this device may not cause interference, and
- this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1. l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC: 22868 - VDIBRHS01

FCC ID: 2AMJS - VDIBRHS01

RF exposure:

- The equipment complies with FCC RF exposure limits set forth for an uncontrolled environment.
- 2. This equipment must be installed and operated with a separation distance of at least 20 cm from all persons.
- The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Mexico

IFETEL

Marca: Robert Bosch LLC Modelo(s): VIPHI2BT

Número: RCPBOVI18-0967

NOM-208-SCFI-2016

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

Brazil



Agência Nacional de Telecomunicações

03473 – 18 – 04473 Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Para maiores informações, consulte o site da ANATEL.

Japan

This device is granted pursuant to the Japanese Radio Law (電波法) and the Japanese Telecommunications Business Law (電気通信事業法). This device should not be modified (otherwise the granted designation number will become invalid).

Europe

Declaration of Conformity

Simplified EU Declaration of Conformity according Radio Equipment Directive 2014/53/EU



DE

Hiermit erklärt Robert Bosch LLC, dass der Funkanlagentyp VIPHI2BT der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: eu-doc. bosch com

FD

Le soussigné, Robert Bosch LLC, déclare que l'équipement radioélectrique du type VIPHI2BT est conforme à la directive 2014/53/UE.

Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante:eu-doc.

BG

С настоящото Robert Bosch LLC декларира, че този тип радиосъоръжение VIPHI2BT е в съответствие с Директива 2014/53/EC.

Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: eu-doc. bosch.com

FI

Με την παρούσα ο/η Robert Bosch LLC, δηλώνει ότι ο ραδιοεξοπλισμός VIPHI2BT πληροί την οδηγία 2014/53/EE. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: eu-doc. bosch.com

CS

Tímto Robert Bosch LLC prohlašuje, že typ rádiového zařízení VIPHI2BT je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: eu-doc.bosch.com

DA

Hermed erklærer Robert Bosch LLC, at radioudstyrstypen VIPHI2BT er i overensstemmelse med direktiv 2014/53/EU.

EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: eu-doc.bosch.com

Käesolevaga deklareerib Robert Bosch LLC, et käesolev raadioseadme tüüp VIPHI2BT vastab direktiivi 2014/53/FI nõuetele.

ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: eu-doc.bosch.com

ES

Por la presente, Robert Bosch LLC declara que el tipo de equipo radioeléctrico VIPHI2BT es conforme con la Directiva 2014/53/UE.

El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: eu-doc. bosch.com

FI

Robert Bosch LLC vakuuttaa, että radiolaitetyyppi VIPHI2BT on direktiivin 2014/53/EU mukainen.

EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: eu-doc. bosch.com

FN

Hereby, Robert Bosch LLC declares that the radio equipment type VIPHI2BT is in compliance with Directive 2014/53/FU.

The full text of the EU declaration of conformity is available at the following internet address: eu-doc.bosch.com HR

Robert Bosch LLC ovime izjavljuje da je radijska oprema tipa VIPHI2BT u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: eu-doc.bosch.com HU

Robert Bosch LLC igazolja, hogy a VIPHI2BT típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyllatkozat teljes szövege elérhető a következő internetes címen: eu-doc.bosch.com rr

Il fabbricante, Robert Bosch LLC, dichiara che il tipo di apparecchiatura radio VIPHI2BT è conforme alla direttiva 2014/53/UF.

Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: eu-doc.

LT

Aš, Robert Bosch LLC, patvirtinu, kad radijo įrenginių tipas VIPHI2BT atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: eu-doc.bosch.com

LV

Ar šo Robert Bosch LLC deklarē, ka radioiekārta VIPHI2BT atbilst Direktīvai 2014/53/ES.

Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: eu-doc.bosch.com MT

B'dan, Robert Bosch LLC, niddikjara li dan it-tip ta' tagħmir tar-radju VIPHI2BT huwa konformi mad-Direttiva 2014/53/UE.

It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li gej: eu-doc.

...

Hierbij verklaar ik, Robert Bosch LLC, dat het type radioapparatuur VIPHI2BT conform is met Richtlijn 2014/53/FI

De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: eu-doc.

PI

Robert Bosch LLC niniejszym oświadcza, że typ urządzenia radiowego VIPHI2BT jest zgodny z dyrektywą 2014/53/UF.

Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: eu-doc.bosch.com PT

O(a) abaixo assinado(a) Robert Bosch LLC declara que o presente tipo de equipamento de rádio VIPHI2BT está em conformidade com a Diretiva 2014/53/UE.

O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: eu-doc. bosch.com

RO

Prin prezenta, Robert Bosch LLC declară că tipul de echipamente radio VIPHI2BT este în conformitate cu Directiva 2014/53/UE.

Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: eu-doc.bosch.com SV

Named försäkrar Robert Bosch LLC att denna typ av radioutrustning VIPHI2BT överensstämmer med direktiv

Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: eu-doc.bosch.com

Robert Bosch LLC potrjuje, da je tip radijske opreme VIPHI2BT skladen z Direktivo 2014/53/EU.

Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: eu-doc.bosch.com

SN Robert Bosch LLC týmto vyhlasuje, že rádiové zariadenie typu VIPHI2BT je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na teito internetovej adrese: eu-doc.bosch.com

ıs

Robert Bosch LLC lýsir því hér með yfir að þráðlausi fjarskiptabúnaðurinn VIPHI2BT er í samræmi við tilskipun 2014/53/FSB.

Óstyttan texta ESB-samræmisyfirlýsingarinnar er að finna á veffanginu: eu-doc.bosch.com Liechtenstein

Hiermit erklärt Robert Bosch LLC, dass der Funkanlagentyp VIPHI2BT der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: eu-doc.

bosch.com

NO
Hermed erklærer Robert Bosch LLC at radioutstyrstypen VIPHI2BT er i samsvar med direktiv 2014/53/EU.
Hele teksten i EU-samsvarserklæringen finnes på følgende internettadresse: eu-doc.bosch.com

Компания Robert Bosch LLC настоящим заявляет, что радиотехническое оборудование категории VIPHI2BT отвечает требованиям Директивы 2014/53/EU.

Полный текст декларации соответствия EC доступен на сайте eu-doc.bosch.com.

This page is intentionally blank

TECHNICAL SPECIFICATIONS

ENGINE

850 E-TEC

| ENGINE | |
|----------------------------|--|
| Engine type | Rotax 850 E-TEC liquid cooled with reed valves and electronic RAVE |
| Number of cylinder | 2 |
| Bore | 82 mm (3.228 in) |
| Stroke | 80.4 mm (3.165 in) |
| Displacement | 849 cm³ (51.81 in³) |
| Maximum power engine speed | 7900 ± 100 RPM |

| FUEL SYSTEM | |
|-----------------------------|---|
| Fuel delivery | E-TEC direct injection with integrated auxiliary injection system |
| Idle speed (not adjustable) | 1200 ± 200 RPM |

| ELECTRICAL SYSTEM | | |
|------------------------|------|---|
| Lighting system output | | 30 A @ 14.5 V 1340 W @ 6000 RPM |
| Spark plug | Туре | NGK ILKR8Q7S (engine and spark plug threads are indexed) |
| | Gap | Not adjustable 0.6 to 0.7 mm (.024 to .028 in) |

| LUBRICATION SYSTEM | | | |
|-------------------------|----------|---|--|
| Oil injection pump type | | Electronic oil injection pump | |
| | | XPS recommended injection oil | XPS 2T E-TEC synthetic oil |
| Injection oil | Туре | If the XPS product is not available | Use a 2-stroke lubricant designed for snowmobiles meeting or exceeding the following lubricant industry specifications: JASO FD (M345-2004) |
| | | | SAE Grade 4 (F/ M 4) |
| | Quantity | | 3.4 l (3.6 qt (liq.,US)) |

VEHICLE

Brutal

| COOLING SYSTEM | | |
|------------------|-------------------------------------|---|
| | XPS recommended coolant | XPS Extended life pre-mixed coolant |
| Coolant type | If the XPS product is not available | Ethyl glycol and distilled water (50%/ 50%) or coolant specifically formulated for aluminum engines |
| Coolant capacity | | 8.6 I (9.1 qt (liq.,US)) |

| FUEL SYSTEM | | |
|--------------------|---------------|--|
| Fuel pump | | In-tank electrical fuel pump |
| Fuel | Туре | Premium unleaded gasoline (fuel which may contain up to 10% MAX ethanol) |
| | Octane rating | 87 Pump Posted AKI ((R+M)/2) 92 (RON) |
| Fuel tank capacity | | 42 I (44.3 qt (liq.,US)) |

| ELECTRICAL SYSTEM | | | |
|-------------------------|----|--------------------|--------------|
| Battery | | | 12 V, 18 A•h |
| Headlamp | | 2 x 60/55 W (H-13) | |
| Taillight and stoplight | | 2 x 0.5/1.2 W LED | |
| Fuses | FA | Battery | 40 A |

| ELECTRICAL SYSTEM | | | |
|-------------------|---|------------------------------------|------|
| | F1 | Start / RER | 5 A |
| | F2 | Headlamps | 20 A |
| | F3 | Cluster | 15 A |
| | F4 | RFID / Starter / Rotary Control | 10 A |
| | F5 | Accessories | 15 A |
| | F6 | Fan | 15 A |
| | F8 | Taillights / PAC | 10 A |
| Relays | RY1 (with Large Panoram ic Digital Display) | Main | - |
| | RY2 | Fan | - |

| DRIVE SYSTEM - CHAINCASE | | | |
|--------------------------|----------|-------------------------------------|---|
| Chaincase oil | Туре | XPS recommended oil | XPS Synthetic chaincase oil |
| | | If the XPS product is not available | 75W140 gear oil that meets the API GL-5 specification |
| | Capacity | | 350 ml (11.8 fl oz (US)) |
| Chain drive ratio | | 21 / 51 / 116 | |

| DRIVE SYSTEM - PULLEYS | |
|-----------------------------|------------------------------|
| Drive pulley type | pDrive with clicker and shim |
| Drive pulley engagement RPM | 3000 ± 100 RPM |
| Driven pulley type | QRS Vent Plus |

| DRIVE SYSTEM - TRACK | | |
|----------------------------------|----------------|---------------------|
| Drive sprocket number of teeth 8 | | 8 |
| | Width | 500 mm (20 in) |
| Track | Length | 3900 mm (154 in) |
| | Profile height | 60 mm (2.35 in) |
| Track adjustment | Deflection | 32 mm (1.26 in) |
| | Force | 7.3 kgf (16 lbf) |

| BRAKE SYSTEM | | |
|--------------------|----------|---|
| Brake | Туре | Single 200 mm cross drilled carbon steel disc |
| Brake fluid | Туре | DOT 4 |
| | Quantity | 65 ml (2.2 fl oz (US)) |
| Caliper | | Fixed twin pistons (2 x 40 mm) |
| Brake pad material | | Standard |

| BRAKE SYSTEM | | |
|--|---------------------|--|
| Minimum brake pad thickness (includes backing plate) | 5 mm (.2 in) | |
| Minimum brake disc thickness | 4.5 mm (.177 in) | |
| Maximum brake disc warpage | 0.25 mm (.01 in) | |

| FRONT SUSPENSION | | |
|---------------------------|------------------------------|--|
| Suspension type | RAS X/ LFS X | |
| Suspension maximum travel | 221 mm (8.7 in) | |
| Shock absorber type | KYB PRO 36 EA-3 R Kashima | |
| Stabilizer bar type | Link | |

| REAR SUSPENSION | | |
|---------------------------|--|---------------------------------|
| Suspension type | | EasyRide Plus Fixed Straight |
| Suspension maximum travel | | 390 mm (15.4 in) |
| Shock absorber Center | | KYB 46 Plus Kashima |
| type Rear | | KYB PRO 46 EA-3 R Kashima |

| WEIGHT AND DIMENSIONS | | |
|-----------------------|-----------------------|--|
| Mass (dry) | 259 kg (571 lb) | |
| Overall length | 3300 mm (129.9 in) | |

VEHICLE

| WEIGHT AND DIMENSIONS | | |
|-----------------------|----------------------|--|
| Overall width | 1200 mm (47.2 in) | |
| Overall height | 1235 mm (48.6 in) | |
| Ski stance | 990 mm (39 in) | |

TROUBLESHOOT-ING

TROUBLESHOOTING GUIDELINES – E-TEC ENGINES

FLECTRIC STARTER DOES NOT WORK

- Emergency engine stop switch in OFF position or tether cord cap not installed on engine cut-off switch.
 - Place the emergency engine stop switch in the ON position and install tether cord cap (on engine cut-off switch.
- 2. Throttle applied while attempting an engine start.
 - Release throttle while cranking.

FNGINE IS CRANKING BUT FAILS TO START

- 1. No fuel to the engine.
 - Check fuel tank level, add fuel if necessary.
- System voltage too low.
 - Contact an authorized BRP snowmobile dealer.

ENGINE RPM DOES NOT REACH CLUTCH ENGAGEMENT POINT

- D.E.S.S. did not read D.E.S.S. key code in the tether cord cap. D.E.S.S. pilot lamp blinks (slow short beeps/ repetitive).
 - Properly install tether cord cap.
- D.E.S.S. has read a different code than the one programmed. D.E.S.S. pilot lamp blinks rapidly (fast short beeps/repetitive).
 - Install a tether cord cap for which this snowmobile was programmed.
- ECM does not recognize the D.E.S.S. key.
 - Refer to an authorized BRP snowmobile dealer.

ENGINE LACKS ACCELERATION OR POWER

- Engine warm-up in progress.
 - Drive vehicle at low speeds for a few minutes.
- Engine break-in period not completed.
 - Complete break-in period.
- Drive and driven pulleys require servicing.
 - Contact an authorized BRP snowmobile dealer.
- 4. Engine overheats.
 - Check coolant level, see Maintenance procedures.
 - Check heat exchangers cleanliness. Clean if necessary.
- 5. Drive belt worn too thin.
 - If the drive belt has lost more than 3 mm (1/8 in) of its original width, it will affect vehicle performance.
 - Replace drive belt.
- 6. Incorrect track adjustment.
 - See MAINTENANCE and/or an authorized Lynx dealer for proper alignment and tension adjustments.
- 7. R.A.V.E. valves problem.
 - Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.
- 8. Fuel pressure too low.
 - Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.

ENGINE BACKFIRES

- 1. Engine is running too hot.
 - See item 4 of ENGINE LACKS POWER.
- Ignition timing is incorrect or there is an ignition system failure.
 - Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.
- Exhaust system leak.
 - Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.
- 4. Fuel pressure too low.
 - Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.

ENGINE MISFIRES

- 1 Water in fuel
 - Drain fuel system and refill with fresh fuel.
- RAVE valves malfunction.
 - Have RAVE valves system inspected. Seek service from an authorized BRP snowmobile dealer, repair shop, or person of your own choosing for maintenance, repair, or replacement.

HEATED GRIPS/THUMB WARMERS ARE NOT WORKING

- Engine RPM is too low.
 - Make sure engine RPM is above 2000.

ENGINE HAS SHUT DOWN

- The engine shuts down after long periods of idling.
 - Do not let engine idle too long. Refer to Vehicle warm-up in operating instruction.

MONITORING SYSTEM

Pilot Lamps, Messages and Beeper Codes Pilot Lamps – 7.2" Digital Display



Pilot lamp can flash alone or in combination with another lamp.

The lower display is used as a complement of the pilot lamps to give you a brief description if an anomaly occurs or to inform you of a particular condition.



7.2" DIGITAL LOWER DISPLAY

Messages will be displayed with a beep code and pilot lamp(s).

Beeper codes will be heard, and messages will be displayed to catch your attention.

See table below for details.

NOTE:

Some of the listed pilot lamps and messages do not apply to all models.

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|-----------------------------------|--|
| }} }}π | 4 short beeps every 30 seconds | HIGH ENGINE TEMPERA TURE | Engine is overheating, reduce snowmobile speed and run in loose snow or stop engine immediately and let engine cool down. Check coolant level, refer to Maintenance. If coolant level is correct and overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| | | MUFFLER OVERHEAT | Reduce speed or stop engine. Let engine cool down and restart. If overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| ₽ | Short beeps repeating rapidly | HIGH ENGINE TEMPERA TURE | Critical overheat. Stop engine immediately and let engine cool down. Check coolant level, refer to <i>Maintenance</i> . If coolant level is correct and overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| | | MUFFLER OVERHEAT | Critical overheat. Stop engine immediately and |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|--------------------|---|
| | | ECM OVERHEAT | let engine cool down. If overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| -+ | 4 short beeps every 5 minutes | BATT VOLT | Indicate a low or high battery voltage condition. Visit an authorized BRP snowmobile dealer as soon as possible. |
| \bigcirc | 4 short beeps | CHECK ENGINE | Engine fault, see an authorized BRP snowmobile dealer, repair shop or person of your own choosing as soon as possible. |
| | | _ | Displayed when brake is applied for more than 15 seconds while throttle lever is squeezed and vehicle is moving at more than 5 km/h (3 mph). |
| _ | 4 short beeps every 5 minutes | KNOCK | Engine detonation (RPM is limited when this condition occurs). - Ensure recommended fuel is used. - Check fuel quality, replace if necessary. |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|---|--------------------|---|
| | | | If fault still occurs, contact an authorized BRP snowmobile dealer, repair shop, or person of your own choosing. |
| _ | 4 short beeps every 5 minutes | REV LIMIT | Engine RPM limited for protection when certain faults occur. |
| _ | | OVER REV | Indicates that maximum engine RPM is reached. Check clutch calibration. |
| _ | Short beeps repeating rapidly | SHUTDOWN | Shutdown procedure in force due to engine overheating or fuel pump problem. |
| _ | 2 short beeps every 10 seconds | BELT OVERHEAT | The belt temperature reaches 75 C 167 F. Message and beeps disappears when the temperature drops below 75 C 167 F. |
| _ | 2 short beeps every 15 seconds | BELT OVERLOAD | If a critical condition is detected over 1 minute. Message and beeps disappears if the driver reduces critical style of riding. |
| _ | 2 short beeps every 10 seconds | BELT OVERLOAD | If it stills in critical condition over 10 minutes. Message will |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|--------------------|--|
| | | | not disappear until the engine shutdown. |
| | 2 short beeps | _ | Good key, vehicle ready to operate. |
| DESS | Short beeps, repeating slowly | WRONG KEY | Unable to read key (bad connection). Make sure the key is clean and correctly snapped on post. |
| | Short beeps repeating rapidly | BAD KEY | Invalid key or key not programmed. Use the proper key for the vehicle or have the programmed. |
| (blinking) | _ | _ | Fuel level sensor problem. |

Pilot Lamps, Messages and Beeper Codes Pilot Lamps – Large Panoramic 7.8" Wide LCD Display

Gauge pilot lamp(s) will inform you if an anomaly occurs or to inform you of a particular condition.



Pilot lamp can flash alone or in combination with another lamp.

The lower display is used as a complement of the pilot lamps to give you a brief description if an anomaly occurs or to inform you of a particular condition.



LARGE PANORAMIC 7.8" WIDE LCD DISPLAY

Messages will be displayed with a beep code and pilot lamp(s).

Beeper codes will be heard, and messages will be displayed to catch your attention.

See table below for details.

NOTE:

Some of the listed pilot lamps and messages do not apply to all models.

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|---|-----------------------------------|--|
| **** | 4 short beeps every 30 seconds | HIGH ENGINE TEMPERA TURE | Engine is overheating, reduce snowmobile speed and run in loose snow or stop engine immediately and let engine cool down. Check coolant level, refer to Maintenance. If coolant level is correct and overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| | | MUFFLER OVERHEAT | Reduce speed or stop engine. Let engine cool |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|-----------------------------------|---|
| | | | down and restart. If overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| }} }} | Short beeps repeating rapidly | HIGH ENGINE TEMPERA TURE | Critical overheat. Stop engine immediately and let engine cool down. Check coolant level, refer to <i>Maintenance</i> . If coolant level is correct and overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| | таріціу | MUFFLER OVERHEAT | Critical overheat. Stop engine immediately and |
| | | ECM OVERHEAT | let engine cool down. If overheating persists, contact an authorized BRP snowmobile dealer. Do not run the engine if condition persists. |
| - + | 4 short beeps every 5 minutes | BATT VOLT | Indicate a low or high battery voltage condition. Visit an authorized BRP snowmobile dealer as soon as possible. |
| | 4 short beeps | CHECK ENGINE | Engine fault, see an authorized BRP snowmobile dealer, |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|--------------------|---|
| | | | repair shop or person of your own choosing as soon as possible. |
| | ĺ | I | Displayed when brake is applied for more than 15 seconds while throttle lever is squeezed and vehicle is moving at more than 5 km/h (3 mph). |
| _ | 4 short beeps every 5 minutes | KNOCK | Engine detonation (RPM is limited when this condition occurs). - Ensure recommended fuel is used. - Check fuel quality, replace if necessary. - If fault still occurs, contact an authorized BRP snowmobile dealer, repair shop, or person of your own choosing. |
| _ | 4 short beeps every 5 minutes | REV LIMIT | Engine RPM limited for protection when certain faults occur. |
| _ | _ | OVER REV | Indicates that maximum engine RPM is reached. Check clutch calibration. |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|---|--------------------|---|
| _ | Short beeps repeating rapidly | SHUTDOWN | Shutdown procedure in force due to engine overheating or fuel pump problem. |
| _ | 2 short beeps every 10 seconds | BELT OVERHEAT | The belt temperature reaches 75 C 167 F. Message and beeps disappears when the temperature drops below 75 C 167 F. |
| _ | 2 short beeps every 15 seconds | BELT OVERLOAD | If a critical condition is detected over 1 minute. Message and beeps disappears if the driver reduces critical style of riding. |
| _ | 2 short beeps every 10 seconds | BELT OVERLOAD | If it stills in critical condition over 10 minutes. Message will not disappear until the engine shutdown. |

| Pilot lamp ON | BEEPER | Message Display | Description |
|---------------------|--|--------------------|--|
| DESS | 2 short beeps | 1 | Good key, vehicle ready to operate. |
| | Short beeps, repeating slowly | WRONG KEY | Unable to read key (bad connection). Make sure the key is clean and correctly snapped on post. |
| | Short beeps repeating rapidly | BAD KEY | Invalid key or key not programmed. Use the proper key for the vehicle or have the programmed. |
| (blinking) | _ | _ | Fuel level sensor problem. |

Fault Codes

The fault codes can be displayed on the center display.

The fault codes are accessible in the setting menu.

Contact an authorized BRP snowmobile dealer for code signification.

WARRANTY

BRP LIMITED WARRANTY USA AND CANADA: 2025 LYNX® SNOWMOBILES

1) SCOPE OF THE LIMITED WARRANTY

Bombardier Recreational Products Inc. ("BRP") warrants its 2025 LYNX® snowmobiles (the "Product") sold by a BRP Dealers authorized to distribute the Product in the United States of America ("USA") and in Canada (a "BRP Dealer") from defects in material or workmanship for the period and under the conditions described below.

This limited warranty will become null and void if:

- The Product was used for racing or any other competitive activity, at any point, even by a previous owner; or
- The Product has been altered or modified in such a way so as to adversely affect its operation, performance or durability, or has been altered or modified to change its intended use.

Non-factory installed parts and accessories are not covered under this limited warranty. Please refer to the applicable parts and accessories limited warranty text.

2) LIMITATIONS OF LIABILITY

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXPRESSLY GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT THAT THEY CANNOT BE DISCLAIMED, THE IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE LIFE OF THE EXPRESS WARRANTY. INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXCLUDED FROM COVERAGE UNDER THIS WARRANTY. SOME STATES/PROVINCES DO NOT ALLOW FOR THE DISCLAIMERS, LIMITATIONS AND EXCLUSIONS IDENTIFIED ABOVE. AS A RESULT, THEY MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC RIGHTS, AND YOU MAY ALSO HAVE OTHER LEGAL RIGHTS WHICH MAY VARY FROM STATE TO STATE, OR PROVINCE TO PROVINCE.

Neither the distributor, any BRP Dealer nor any other person has been authorized to make any affirmation, representation or warranty regarding the Product, other than those contained in this limited warranty, and if made, shall not be enforceable against BRP. BRP reserves the right to modify this limited warranty at any time, being under- stood that such modification will not alter the warranty conditions applicable to the Products sold while this warranty is in effect.

3) EXCLUSIONS - ARE NOT WARRANTED

The following are not warranted under any circumstances:

Normal wear and tear:

- Routine maintenance items, tune ups, adjustments;
- Damage caused by failure to provide proper maintenance and/or storage, as described in the Operator's Guide;
- Damage resulting from removal of parts, improper repairs, service, maintenance, modifications or use of parts or accessories not manufactured or approved by BRP or resulting from repairs done by a person that is not an authorized servicing BRP Dealer;
- Damage caused by abuse, abnormal use, neglect, use of the Product on surfaces other than snow, or operation of the product in a manner inconsistent with the recommended operation described in the Operator's Guide:
- Damage resulting from accident, submersion, fire, snow or water ingestion, theft, vandalism or any act of God;
- Operation with fuels, oils or lubricants which are not suitable for use with the Product (see the Operator's Guide);
- Incidental or consequential damages, or damages of any kind including without limitation towing, storage, telephone, rental, taxi, inconvenience, insurance coverage, loan payments, loss of time, loss of income: and
- Damage resulting from studs installed on tracks if the installation does not conform to BRP's instructions.

4) WARRANTY COVERAGE PERIOD

This limited warranty will be in effect from (1) the date of delivery to the first retail consumer, or (2) the date the Product is first put into use, whichever occurs first and for the applicable period below:

- TWELVE (12) consecutive months, for private use or commercial use owners. However, the warranty coverage period on a snowmobile delivered between June 1st and December 1st of a given year will expire November 30th of the following year
- For emission-related components, please also refer to the US EPA Emission-related Warranty.

The repair or replacement of parts or the performance of service under this warranty does not extend the life of this limited warranty beyond its original expiration date.

5) CONDITIONS TO HAVE WARRANTY COVERAGE

This warranty coverage is available **only** if **each** of the following conditions has been fulfilled:

- The Product must be purchased as new and unused by its first owner from a BRP Dealer authorized to distribute Products in the country in which the sale occurred:
- The BRP specified pre-delivery inspection process must be completed, documented and signed by the purchaser;

- The Product must have undergone proper registration by an authorized BRP Dealer;
- The Product must be purchased in the country in which the purchaser resides:
- Routine maintenance outlined in the Operator's Guide must be timely performed in order to maintain warranty coverage. BRP reserves the right to make warranty coverage contingent upon proof of proper maintenance.

BRP will not honor this limited warranty to any private use owner or commercial use owner if one of the preceding conditions has not been met. Such limitations are necessary in order to allow BRP to preserve both the safety of its products, and also that of its consumers and the general public.

6) WHAT TO DO TO OBTAIN WARRANTY COVERAGE

The customer must cease using the Product upon the appearance of an anomaly, notify a servicing BRP Dealer within two (2) months of the appearance of the anomaly and provide the Dealer with reasonable access to the Product and reasonable opportunity to repair it.

The notification period is subject to the applicable national or local legislation in customer's country.

The customer must also present to the BRP Dealer proof of purchase of the Product and must sign the repair/work order prior to starting the repair in order to validate the warranty repair.

All parts replaced under this limited warranty become the property of BRP.

7) WHAT BRP WILL DO

To the extent permitted by law, BRP's obligations under this warranty are limited to, at its sole discretion, repairing or replacing parts found defective under normal use, maintenance and service without charge for parts and labor, at any authorized BRP Dealer during the warranty coverage period under the conditions described herein. No claim of breach of warranty shall be cause for cancellation or rescission of the sale of the Product to the owner. You may have other legal rights which may vary from country to country.

In the event that service is required outside of the country of original sale, the owner will bear responsibility for any additional charges due to local practices and conditions, such as, but not limited to, freight, insurance, taxes, license fees, import duties, and any and all other financial charges, including those levied by governments, states, territories and their respective agencies.

BRP reserves the right to improve or modify products from time to time without assuming any obligation to modify products previously manufactured.

8) TRANSFER

If the ownership of a Product is transferred during the warranty coverage period, this limited warranty, subject to its terms and conditions, shall also be transferred and be valid for the remaining coverage period provided BRP or an authorized BRP Dealer receives a proof that the former owner agreed to the transfer of ownership, in addition to the coordinates of the new owner.

9) CONSUMER ASSISTANCE

In the event of a controversy or a dispute in connection with this limited warranty, BRP suggests that you try to resolve the issue at the dealership level. We recommend discussing the issue with the authorized BRP Dealer's service manager or owner.

If the matter still remains unresolved, contact BRP by filling out the customer contact form at **www.brp.com** or contact BRP by mail at one of the addresses listed under the *CONTACT US* section of this guide.

US EPA EMISSION-RELATED WARRANTY

Bombardier Recreational Products Inc. ("BRP") warrants to the ultimate purchaser and each subsequent purchaser that this new engine, including all parts of its exhaust emission-control system and its evaporative emission-control system, meets two conditions:

- It is designed, built, and equipped so it conforms at the time of sale to the ultimate purchaser with the requirements of 40 CFR 1051 and 40 CFR 1060.
- It is free from defects in materials and workmanship that may keep it from meeting the requirements of 40 CFR 1051 and 40 CFR 1060.

Where a warrantable condition exists, BRP will repair or replace, as it elects, any part or component with a defect in materials or workmanship that would increase the engine's emissions of any regulated pollutant within the stated warranty period at no cost to the owner, including expenses related to diagnosing and repairing or replacing emission-related parts. All defective parts replaced under this warranty become the property of BRP.

For all emission-related warranty claims, BRP is limiting the diagnosis and repair of emission-related parts to the authorized LYNX dealers, unless for emergency repairs as required by item 2 of the following list.

As a certifying manufacturer, BRP will not deny emission-related warranty claims based on any of the following:

- Maintenance or other service BRP or BRP's authorized facilities performed.
- Engine/equipment repair work that an operator performed to correct an unsafe, emergency condition attributable to BRP as long as the operator tries to restore the engine/equipment to its proper configuration as soon as possible.
- Any action or inaction by the operator unrelated to the warranty claim.
- Maintenance that was performed more frequently than BRP specify.
- Anything that is BRP fault or responsibility.
- 6. The use of any fuel that is commonly available where the equipment operates unless BRP written maintenance instructions state that this fuel would harm the equipment's emission control system and operators can readily find the proper fuel. See maintenance information section and fuel requirements of fueling section.

Emission-Related Warranty Period

The emission-related warranty is valid for the following period whichever comes first:

| | Hours | Months | Kilometers |
|---|-------|--------|------------|
| Exhaust emission-relat ed components | 200 | 30 | 4000 |
| Evaporative emission-relat ed components | N/A | 24 | N/A |

Components Covered

The emission-related warranty covers all components whose failure would increase an engine's emissions of any regulated pollutant, including the following listed components:

- For exhaust emissions, emission-related components include any engine parts related to the following systems:
 - Air-induction system
 - Fuel system
 - Ignition system
 - Exhaust gas recirculation systems
- The following parts are also considered emission-related components for exhaust emissions:
 - Aftertreatment devices
 - Crankcase ventilation valves
 - Sensors
 - Electronic control units
- 3. The following parts are considered emission-related components for evaporative emissions:
 - Fuel tank
 - Fuel cap
 - Fuel line
 - Fuel line fittings
 - Clamps*
 - Pressure relief valves*
 - Control valves*
 - Control solenoids*
 - Electronic controls*
 - Vacuum control diaphragms*
 - Control cables*
 - Control linkages*
 - Purge valves
 - Vapor hoses

US EPA EMISSION-RELATED WARRANTY

- Liquid/vapor separator
- Carbon canister
- Canister mounting brackets
- Carburetor purge port connector

NOTE:

*As related to the evaporative emission control system

 Emission-related components also include any other part whose only purpose is to reduce emissions or whose failure will increase emissions without significantly de- grading engine/equipment performance.

Limited Applicability

As a certifying manufacturer, BRP may deny emission-related warranty claims for failures that have been caused by the owner's or operator's improper maintenance or use, by accidents for which the manufacturer has no responsibility, or by acts of God.

For example, an emission-related warranty claim need not be honored for failures that have been directly caused by the operator's abuse of the engine/equipment or the operator's use of the engine/equipment in a manner for which it was not designed and are not attributable to the manufacturer in anyway.

If you have any question regarding your warranty rights and responsibility or for the name and location of the nearest authorized BRP dealer, you should contact BRP by filling out the customer contact form at www.brp.com or contact BRP by mail at one of the addresses listed under the CONTACT US section of this guide, or call at 1-888-272-9222.

BRP INTERNATIONAL LIMITED WARRANTY: 2025 LYNX® SNOWMOBILES

1) SCOPE OF THE LIMITED WARRANTY

Bombardier Recreational Products Inc. ("BRP") warrants its 2025 LYNX® snowmobiles (the "Product") sold by distributors or dealers authorized by BRP to distribute the Product (a "BRP Distributor / Dealer") outside of the United States of America, Canada, members of the European Economic Area (which is comprised of the member states of the European Union plus United Kingdom, Norway, Iceland and Liechtenstein) ("EEA"), members states of the Commonwealth of the Independent States (including Ukraine and Turkmenistan) ("CIS") and Turkey, from defects in material or workmanship for the period and under the conditions described below.

Non-factory installed parts and accessories are not covered under this limited warranty. Please refer to the applicable parts and accessories limited warranty text.

This limited warranty will become null and void if:

- The Product was used for racing or any other competitive activity, at any point, even by a previous owner; or
- The Product has been altered or modified in such a way so as to adversely affect its operation, performance or durability, or has been altered or modified to change its intended use.

2) LIMITATIONS OF LIABILITY

TO THE EXTEND PERMITTED BY LAW, THIS WARRANTY IS EX-PRESSLY GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTH-ER WARRANTIES, EXPRESSED OR IMPLIED, **INCLUDING** WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT THAT THEY CANNOT BE DISCLAIMED, THE IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE LIFE OF THE EXPRESS WARRANTY, INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXCLUDED FROM COVERAGE UNDER THIS WARRANTY. SOME JURISDICTIONS DO NOT ALLOW FOR THE DISCLAIMERS. LIMITATIONS AND EXCLUSIONS IDENTIFIED ABOVE. AS A RE-SULT. THEY MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC RIGHTS, AND YOU MAY ALSO HAVE OTHER LE-GAL RIGHTS WHICH MAY VARY FROM COUNTRY TO COUNTRY. BRP SHALL NOT BE HELD LIABLE IF PRODUCTS OR WARRANTY PARTS ARE NOT AVAILABLE IN CERTAIN COUNTRIES FOR REA-SONS OUTSIDE OF BRP'S CONTROL.

For Products purchased in Australia, refer to the Australia specific section below.

Neither the BRP Distributor/Dealer nor any other person has been authorized to make any affirmation, representation or warranty regarding

the Product, other than those contained in this limited warranty, and if made, shall not be enforce- able against BRP.

BRP reserves the right to modify this limited warranty at any time, being understood that such modification will not alter the warranty conditions applicable to the Products sold while this warranty is in effect.

3) EXCLUSIONS - ARE NOT WARRANTED

The following are not warranted under this limited warranty under any circumstances:

- Normal wear and tear:
- Routine maintenance items, tune ups, adjustments;
- Damage caused by negligence or failure to provide proper maintenance and/or storage, as described in the Operator's Guide;
- Damage resulting from removal of parts, improper repairs, service, maintenance, modifications or use of parts or accessories not manufactured or approved by BRP which in its reasonable judgement are either incompatible with the Product or adversely affect its operation, performance and durability, or resulting from repairs done by a person that is not an authorized servicing BRP Distributor/ Dealer:
- Damage caused by abuse, abnormal use, neglect, racing or operation of the Product on surfaces other than snow, or operation of the Product in a manner inconsistent with the recommended operation described in the Operator's Guide;
- Damage resulting from accident, submersion, fire, snow or water ingestion, theft, vandalism or any act of God;
- Operation with fuels, oils or lubricants which are not suitable for use with the Product (see the Operator's Guide):
- Damage resulting from rust, corrosion or exposure to the elements:
- Incidental or consequential damages, or damages of any kind including without limitation towing, storage, transportation expenses, telephone, rental, taxi, inconvenience, insurance coverage, loan payments, loss of time, loss of income; or time missed for downtime experience due to service work, and;
- Damage resulting from studs installed on tracks if the installation does not conform to BRP's instructions.

4) WARRANTY COVERAGE PERIOD

This limited warranty will be in effect from (1) the date of delivery to the first retail consumer, or (2) the date the Product is first put into use, whichever occurs first and for the applicable period below:

TWELVE (12) consecutive months, for private use or commercial use owners. However, the warranty coverage period on a snowmobile delivered between June 1st and December 1st of a given year will expire November 30th of the following year.

The repair or replacement of parts or the performance of service under this warranty does not extend the life of this warranty beyond its original expiration date.

The warranty coverage period identified above are a minimal limited warranty period which can be extended by any applicable warranty promotional program, as the case may be.

Note that the duration and any other modalities of the warranty coverage are subject to the applicable national or local legislation in the customer's country.

FOR PRODUCTS SOLD IN AUSTRALIA ONLY

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for

compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Nothing in these warranty terms and conditions should be taken to exclude, restrict or modify the application of any condition, warranty, guarantee, right or remedy conferred or implied under the Competition and Consumer Act 2010 (Cth), including the Australian Consumer Law or any other law, where to do so would contravene that law, or cause any part of these terms and conditions to be void. The benefits given to you under this limited warranty are in addition to other rights and remedies that you have under Australian law.

5) CONDITIONS TO HAVE WARRANTY COVERAGE

This warranty coverage is available only if each of the following conditions has been fulfilled.

- The Product must be purchased as new and unused by its first owner from a BRP Distributor/Dealer authorized to distribute Products in the country in which the sale occurred:
- 2. The BRP specified pre-delivery inspection process must be completed, documented and signed by the purchaser;
 3. The Product must have undergone proper registration by an au-
- thorized BRP Distributor/ Dealer;
- 4. The Product must be purchased in the country in which the purchaser resides:
- 5. Routine maintenance outlined in the Operator's Guide must be timely performed in order to maintain warranty coverage. BRP

reserves the right to make warranty coverage contingent upon proof of proper maintenance.

BRP will not honor this limited warranty to any private use owner or commercial use owner if one of the preceding conditions has not been met. Such limitations are necessary in order to allow BRP to preserve both the safety of its products, and also that of its consumers and the general public.

6) WHAT TO DO TO OBTAIN WARRANTY COVERAGE

The customer must cease using the Product upon the appearance of an anomaly, notify a servicing BRP Distributor/Dealer within two (2) months of the appearance of the anomaly and provide the BRP Distributor/Dealer with reasonable access to the Product and reasonable opportunity to repair it.

The notification period is subject to the applicable national or local legislation in customer's country.

The customer must also present to the BRP Distributor/Dealer, proof of purchase of the Product and must sign the repair/work order prior to starting the repair in order to validate the warranty repair.

All parts replaced under this limited warranty become the property of BRP.

7) WHAT BRP WILL DO

To the extent permitted by law, BRP's obligations under this warranty are limited to, at its sole discretion, repairing or replacing parts found defective under normal use, maintenance and service without charge for parts and labor, at any authorized BRP Distributor/Dealer during the warranty coverage period under the conditions described herein. No claim of breach of warranty shall be cause for cancellation or rescission of the sale of the Product to the owner. You may have other legal rights which may vary from country to country.

In the event that service is required outside of the country of original sale, the owner will bear responsibility for any additional charges due to local practices and conditions, such as, but not limited to, freight, insurance, taxes, license fees, import duties, and any and all other financial charges, including those levied by governments, states, territories and their respective agencies.

BRP reserves the right to improve or modify products from time to time without assuming any obligation to modify products previously manufactured.

8) TRANSFER

If the ownership of a Product is transferred during the warranty coverage period, this limited warranty, subject to its terms and conditions, shall also be transferred and be valid for the remaining coverage period provided BRP or an authorized BRP Distributor / Dealer receives a proof that the former owner agreed to the transfer of ownership, in addition to the coordinates of the new owner.

9) CONSUMER ASSISTANCE

In the event of a controversy or a dispute in connection with this limited warranty, BRP suggests that you try to resolve the issue at the BRP Distributor / Dealer level. We recommend discussing the issue with the authorized BRP Distributor / Dealer's service manager or owner.

If the matter still remains unresolved, contact BRP by filling out the customer contact form at **www.brp.com** or contact BRP by mail at one of the addresses listed under the *CONTACT US* section of this guide.

BRP LIMITED WARRANTY FOR THE EUROPEAN ECONOMIC AND THE COMMONWEALTH OF THE INDEPENDENT STATES (CIS) AREAS AND TURKEY: 2025 LYNX® SNOWMOBILES

1) SCOPE OF THE LIMITED WARRANTY

Bombardier Recreational Products Inc. ("BRP") warrants its 2025 LYNX® snowmobiles (the "Product") sold by distributors or dealers authorized by BRP to distribute the Product in member states of the European Economic Area (which is comprised of the states of the European Union plus the United Kingdom, Norway, Iceland and Liechtenstein) ("EEA"), Turkey, member states of the Commonwealth of the Independent States (including Ukraine and Turkmenistan) ("CIS") (a "BRP Distributor/Dealer") from defects in material or workmanship for the period and under the conditions described below.

This limited warranty will become null and void if:

- The Product was used for racing or any other competitive activity, at any point, even by a previous owner; or
- The Product has been altered or modified in such a way so as to adversely affect its operation, performance or durability, or has been altered or modified to change its intended use.

Non-factory installed parts and accessories are not covered under this limited warranty. Please refer to the applicable parts and accessories limited warranty text.

2) LIMITATIONS OF LIABILITY

TO THE EXTEND PERMITTED BY LAW, THIS WARRANTY IS EX-PRESSLY GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTH-ER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT THAT THEY CANNOT BE DISCLAIMED, THE IMPLIED WARRAN-TIES ARE LIMITED IN DURATION TO THE LIFE OF THE EXPRESS WARRANTY. INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXCLUDED FROM COVERAGE UNDER THIS WARRANTY. SOME JURISDICTIONS DO NOT ALLOW FOR THE DISCLAIMERS, LIMITATIONS AND EXCLUSIONS IDENTIFIED ABOVE. AS A RE-SULT, THEY MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC RIGHTS. AND YOU MAY ALSO HAVE OTHER LE-GAL RIGHTS WHICH MAY VARY FROM JURISDICTIONS TO JU-RISDICTIONS. BRP SHALL NOT BE HELD LIABLE IF PRODUCTS OR WARRANTY PARTS ARE NOT AVAILABLE IN CERTAIN COUN-TRIES FOR REASONS OUTSIDE OF BRP'S CONTROL.

For Products purchased in France, refer to the France specific section below.

Neither the BRP Distributor/Dealer nor any other person has been authorized to make any affirmation, representation or warranty regarding the Product, other than those contained in this limited warranty, and if made, shall not be enforceable against BRP.

BRP reserves the right to modify this limited warranty at any time, being understood that such modification will not alter the warranty conditions applicable to the Products sold while this warranty is in effect.

3) EXCLUSIONS - ARE NOT WARRANTED

The following are not warranted under this limited warranty under any circumstances:

- Normal wear and tear;
- Routine maintenance items, tune ups, adjustments;
- Damage caused by negligence or failure to provide proper maintenance and/or storage, as described in the Operator's Guide;
- Damage resulting from removal of parts, improper repairs, service, maintenance, modifications or use of parts or accessories not manufactured or approved by BRP which in its reasonable judgement are either incompatible with the Product or adversely affect its operation, performance and durability, or resulting from repairs done by a person that is not an authorized servicing BRP Distributor/ Dealer;
- Damage caused by abuse, abnormal use, neglect, racing or operation of the Product on surfaces other than snow, or operation of the Product in a manner inconsistent with the recommended operation described in the Operator's Guide;
- Damage resulting from accident, submersion, fire, snow or water ingestion, theft, vandalism or any act of God;
- Operation with fuels, oils or lubricants which are not suitable for use with the product (see the Operator's Guide);
- Damage resulting from rust, corrosion or exposure to the elements;
- Incidental or consequential damages, or damages of any kind including without limitation towing, storage, transportation expenses, telephone, rental, taxi, inconvenience, insurance coverage, loan payments, loss of time, loss of income; or time missed for downtime experience due to service work. and:
- Damage resulting from studs installed on tracks if the installation does not conform to BRP's instructions.

4) WARRANTY COVERAGE PERIOD

This limited warranty will be in effect from (1) the date of delivery to the first retail consumer, or (2) the date the Product is first put into use, whichever occurs first and for the applicable period below:

 TWENTY-FOUR (24) consecutive months, for private use owners

2. TWELVE (12) consecutive months, for commercial use owners.

However, the warranty coverage period on a snowmobile delivered between June 1st and December 1st of a given year will expire November 30th of the applicable year. A Product is used commercially when it is used in connection with any work or employment that generates income during any part of the warranty period. A Product is also used commercially when, at any point during the warranty period, it is licensed for commercial use

The repair or replacement of parts or the performance of service under this warranty does not extend the life of this warranty beyond its original expiration date.

The warranty coverage period identified above are a minimal limited warranty period which can be extended by any applicable warranty promotional program, as the case may be.

Note that the duration and any other modalities of the warranty coverage are subject to the applicable national or local legislation in the customer's country.

5) CONDITIONS TO HAVE WARRANTY COVERAGE

This warranty coverage is available only if each of the following conditions has been fulfilled:

- The Product must be purchased as new and unused by its first owner from a BRP Distributor / Dealer authorized to distribute products in the country, or in the case of the EEA union, countries in which the sale occurred:
- The BRP specified pre-delivery inspection process must be completed and documented;
- The Product must have undergone proper registration by an authorized BRP Distributor / Dealer:
- The Product must be purchased in the country, or in the case of the EEA union, countries in which the purchaser resides;
- Routine maintenance outlined in the Operator's Guide must be timely performed in order to maintain warranty coverage. BRP reserves the right to make warranty coverage contingent upon proof of proper maintenance.

BRP will not honour this limited warranty to any private use owner or commercial use owner if one of the preceding conditions has not been met. Such limitations are necessary in order to allow BRP to preserve both the safety of its products, and also that of its consumers and the general public.

6) WHAT TO DO TO OBTAIN WARRANTY COVERAGE

The customer must cease using the snowmobile upon the appearance of an anomaly. The customer must notify a servicing BRP Distributor/ Dealer within two (2) months of the appearance of a defect, and provide it with reasonable access to the Product and reasonable opportunity to repair it. The customer must also present to the authorized BRP Distributor/Dealer, proof of purchase of the Product and must sign the repair/work order prior to starting the repair in order to validate the warranty repair. All parts replaced under this limited warranty become the property of BRP.

Note that the notification period is subject to the applicable national or local legislation in customer's country.

7) WHAT BRP WILL DO

To the extent permitted by law, BRP's obligations under this warranty are limited to, at its sole discretion, repairing parts found defective under normal use, maintenance and service, or replacing such positive without charge for parts and labour, at any authorized BRP Distributor/ Dealer during the warranty coverage period under the conditions described herein. BRP's responsibility is limited to making the required repairs or replacements of parts. No claim of breach of warranty shall be cause for cancellation or rescission of the sale of the snowmobile to the owner. You may have other legal rights which may vary from country to country.

In the event that service is required outside of the country of original sale, or for EEA residents, if service is required outside of the EEA, the owner will bear responsibility for any additional charges due to local practices and conditions, such as, but not limited to, freight, insurance, taxes, license fees, import duties, and any and all other financial charges, including those levied by governments, states, territories and their respective agencies.

BRP reserves the right to improve or modify products from time to time without assuming any obligation to modify products previously manufactured

8) TRANSFER

If the ownership of a Product is transferred during the warranty coverage period, this limited warranty, subject to its terms and conditions, shall also be transferred and be valid for the remaining coverage period provided BRP or an authorized BRP Distributor/Dealer receives a proof that the former owner agreed to the transfer of ownership, in addition to the coordinates of the new owner.

9) CONSUMER ASSISTANCE

In the event of a controversy or a dispute in connection with this limited warranty, BRP suggests that you try to resolve the issue at the BRP

Distributor/Dealer level. We recommend discussing the issue with the authorized BRP Distributor/Dealer's service manager or owner.

If the matter still remains unresolved, contact BRP by filling out the customer contact form at **www.brp.com** or contact BRP by mail at one of the addresses listed under the *CONTACT US* section of this guide.

10) ADDITIONAL TERMS AND CONDITIONS FOR FRANCE ONLY

The following terms and conditions are applicable to products sold in France only.

The seller shall deliver goods that are complying with the contract and shall be responsible for defects existing upon delivery. The seller shall also be responsible for defects resulting from packaging, assembling instructions or the installation when it is its responsibility per the contract or if accomplished under its responsibility. To be compliant with the contract, the good shall:

- 1. Be fit for normal use for goods similar thereto and, if applicable:
 - Correspond to the description provided by the seller and have the qualities presented to the buyer though sample or model:
 - Have the qualities that a buyer may legitimately expect considering the public declarations of the seller, the manufacturer of its representative, including in advertising or labeling; or
- Have the characteristics mutually agreed upon as between the parties or be fit for the specific use intended by the buyer and brought to the attention of the seller and which were accepted.

The action for failure to comply is prescribed after two years after delivery of the goods. The seller is responsible for the warranty for hidden defects of the good sold if such hidden defects are rendering the good unfit for the intended use, or if they diminish its use in such a way that the buyer would not have acquired the good or would have given a lesser price, had he known. The action for such hidden defects shall be taken by the buyer within 2 years of the discovery of the defect.

CUSTOMER INFORMATION

DATA PRIVACY INFORMATION

Bombardier Recreational Products Inc., its affiliates and subsidiaries ("BRP") is committed to protecting your privacy and support a general policy of openness about how we collect, use and disclose your personal information in the course of managing our relationship with you. More details can be found by visiting BRP's Privacy Policy at: https://brp.com/en/privacy-policy. html or by scanning the QR Code below

Please be assured that we have appropriate security measures in place to ensure that your personal information is protected against loss and unauthorized access.

Your personal information that may be collected by BRP, directly from you or from authorized dealers or authorized third parties, includes:

- Contact, Demographic & Registration Information (e.g., name, full address, phone number, email, gender, ownership history, language of communication)
- Vehicle Information (e.g., serial number, purchase and delivery date, unit usage, vehicle location and movements)
- Third Party Information (e.g., information received from BRP partners, joint marketing activities information, social media)
- partners, joint marketing activities information, social media)
 Technological Information (e.g., IP address, type of device, operating system, browser type, webpages you view, cookies and similar technologies when you use BRP or dealers' websites or mobile application)
- Interaction with BRP Information (e.g., information collected when you call BRP's in-house sales representatives, buy items on a BRP website, sign up for BRP emails, participate in BRP-sponsored contests and sweepstakes or attend BRP-sponsored events)
- Transactional Information (e.g., information necessary to handle returns, payment information when you purchase our products or services through our websites or mobile applications and other issues related to your purchase of BRP products)

This information may be used and processed for the following purposes:

- Safety & Security
- Customer Support for Sales and After Sales (e.g., complete or follow up with you about your purchase or maintenance)
 - Registration & Warranty
- Communication (e.g., sending you a BRP satisfaction survey)
- Online Behavioural Advertising, Profiling and Location-Based Services
 - (e.g., offer customized experience)
- Compliance & Dispute Resolution
- Marketing & Advertising
- Assistance (e.g., help with any delivery issues, handle returns, and other issues related to your purchase of BRP products).

We also may use personal information to generate aggregated or statistical data that no longer identifies you personally.

Your personal information may be disclosed to the following: BRP, BRP's authorized dealerships, distributors, service providers, advertising and market research partners and other authorized third parties.

We may receive information about you from diverse sources, including third parties, such as BRP's authorized dealerships and partners, with whom we offer services or engage in joint-marketing activities. We may also receive information about you from social media platforms when you interact with us on those platforms.

Depending on the circumstances, your personal information may be communicated outside the region where you reside. Your personal information is retained only for as long as necessary for the purpose for which we obtained it and according to our retention policies.

To exercise your data privacy rights (e.g. right of access, right of rectification), to withdraw your consent in order to be removed from the address list for marketing purposes or for the satisfaction survey or for general data privacy questions, please contact BRP's Data Protection Officer at or by mail at **privacyofficer@brp.com** or by mail at: BRP Legal Service, 726 St-Joseph, Valcourt, Quebec, Canada, J0E 2L0.

When BRP processes your personal information, they do so in compliance with its Privacy Policy available at: https://www.brp.com/en/privacy-policy.html or by using the following QR Code.



CONTACT US

www.brp.com

Asia Pacific

BRP Asia

107D and 107E, 17/F, Tower 1, Grand Century Place, Mongkok, Kowloon, Hong Kong

Australia

Level 26 477 Pitt Street Svdnev. NSW 2020

China

上海市徐汇区衡山路10号6号楼301 Rm 301, Building 6, No.10 Heng Shan Rd, Shanghai, China

Japan

21F Shinagawa East One Tower 2–16–1 Konan, Minato-ku-ku, Tokyo 108–0075

New Zealand

Suite 1.6, 2–8 Osborne Street, Newmarket, Auckland 2013

Europe, Middle East and Africa

Belgium

Oktrooiplein 1 9000 Gent

Czech Republic

Stefanikova 43a Prague 5 150 00

Germany

Alte Papierfabrik 16 D-40699 Erkrath

Finland

Isoaavantie 7 PL 8040 96101 Rovaniemi

France

Arteparc Bâtiment B Route de la côte d'Azur, 13 590 Meyreuil

Norway

Ingvald Ystgaardsvei 15 N-7484 Trondheim Salg, marketing, ettermarked

Sweden

Spinnvägen 15 903 61 Umeå Sweden 90821

Switzerland

Avenue d'Ouchy 4-6 1006 Lausanne

Latin America

Brazil

Av. James Clerck Maxwell, 230 Campinas, Sao Paulo CEP 13069-380

Mexico

Av. Ferrocarril 202 Parque Industrial Querétaro Santo Rosa Jauregui, Querétaro C.P. 76220

North America

Canada

3200A, rue King Ouest, Suite 300 Sherbrooke (Québec) J1L 1C9

United States of America

10101 Science Drive Sturtevant, Wisconsin 53177

CHANGE OF ADDRESS/OWNERSHIP

If your address has changed or if you are the new owner of the snow-mobile, be sure to notify BRP by either:

- Notifying an authorized BRP snowmobile dealer or distributor.
- North America Only: calling at 1 888 272-9222.
- Mailing one of the change of address cards on the following pages at one of the BRP addresses indicated in the Contact Us section of this guide.

In case of change of ownership, please join a proof that the former owner agreed to the transfer.

Notifying BRP, even after the expiration of the limited warranty, is very important as it enables BRP to reach the snowmobile owner if necessary, like when safety recalls are initiated. It is the owner's responsibility to notify BRP.

STOLEN UNITS: If your personal snowmobile is stolen, you should notify BRP or an authorized BRP snowmobile dealer. We will ask you to provide your name, address, phone number, the vehicle identification number and the date it was stolen.

| CHANG | GE OF ADDR | ESS/O | WNEF | ZIP/POSTAL CODE | TELEPHONE | | APT | ZIP/POSTAL CODE | TELEPHONE | |
|---------------------|--|--------------------------------|--------|-----------------|-----------|---------------------------|--------|-----------------|-----------|--|
| CHANGE OF OWNERSHIP | Vehicle Identification Number (V.I.N.) | NAME | STREET | STATE/PROVINCE | | NAME | STREET | STATE/PROVINCE | | |
| CHANGE OF ADDRESS | ION NUMBER | OLD ADDRESS OR PREVIOUS OWNER: | NO. | CITY | COUNTRY | NEW ADDRESS OR NEW OWNER: | NO. | CITY | COUNTRY | |

| CHANC 90 | GE OF ADDF | RESS/O | APT | ZIP/POSTAL CODE | TELEPHONE | | APT | ZIP/POSTAL CODE | TELEPHONE |
|---------------------|--|---------------------------------|--------|-----------------|-----------|---------------------------|--------|-----------------|-----------|
| CHANGE OF OWNERSHIP | Vehicle Identification Number (V.I.N.) | NAME | STREET | STATE/PROVINCE | | NAME | STREET | STATE/PROVINCE | |
| CHANGE OF ADDRESS 🔲 | ION NUMBER | OLD ADDRESS OR PREVIOUS OWNER: | NO. | CITY | COUNTRY | NEW ADDRESS OR NEW OWNER: | NO. | СІТУ | COUNTRY |

| CHAN | GE OF ADDRES | S/OWNEF | RSHIP | | | | | | |
|---------------------|--|------------------------|-----------------|-----------|------------------------------|--------|-----------------|-----------|----------------|
| | | APT | ZIP/POSTAL CODE | TELEPHONE | | APT | ZIP/POSTAL CODE | TELEPHONE | |
| CHANGE OF OWNERSHIP | Vehicle Identification Number (V.I.N.) | STREET | STATE/PROVINCE | | NAME | STREET | STATE/PROVINCE | | S |
| CHANGE OF ADDRESS | VEHICLE IDENTIFICATION NUMBER | OR PREVIOUS OWNER: No. | CITY | COUNTRY | NEW ADDRESS OR NEW OWNER: | NO. | CITY | COUNTRY | E-MAIL ADDRESS |

CHANGE OF ADDRESS/OWNERSHIP **NOTES**

CHANGE OF ADDRESS/OWNERSHIP

353

| NOTES | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

CHANGE OF ADDRESS/OWNERSHIP **NOTES**

CHANGE OF ADDRESS/OWNERSHIP

355

| NOTES | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

CHANGE OF ADDRESS/OWNERSHIP **NOTES**

CHANGE OF ADDRESS/OWNERSHIP

| NOTES | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

CHANGE OF ADDRESS/OWNERSHIP **NOTES**

CHANGE OF ADDRESS/OWNERSHIP

| NOTES | | | |
|-------|-------------|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | - | | |
| | - | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

CHANGE OF ADDRESS/OWNERSHIP **NOTES**

| VEHICLE IDENTIF ENGINE | E ICATION NUMBER | R (V.I.N.) | | | | |
|--|---------------------|----------------|-----------------|--|--|--|
| Owner: | | NAME STREET | | | | |
| | No. | APT | | | | |
| | CITY | STATE/PROVINCE | ZIP/POSTAL CODE | | | |
| | e Date | YEAR MONTH DAY | | | | |
| To be completed by the dealer at the time of the sale. | | | | | | |
| DEALER IMPRINT AREA | | | | | | |



A WARNING

Disregarding any of the safety precautions and instructions contained in the operator's guide, safety video and on product safety labels could cause injury including the possibility of death.



®TM and the BRP logo are trademarks of BOMBARDIER RECREA-TIONAL PRODUCTS INC. or its affiliates. ©2024 BOMBARDIER RECREATIONAL PRODUCTS INC. ALL RIGHTS RESERVED.

www.brp.com

| ALUMACRAFT® | CAN-AM® | LYNX® |
|-------------|-----------|--------|
| MANITOU® | QUINTREX® | ROTAX® |
| SEA-DOO® | SKI-DOO® | |